



·HSK40A-SL 热缩刀柄 (3°一体型)

HSK40A-SL SHRINK FIT HOLDER(3° MONO)

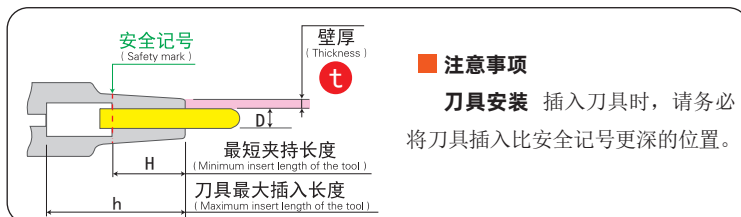

型号 Model	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
HSK40A-SLSA3- 60	3	6	1.5	60	22	18	8.3	20	9	44	0.2	4.8
- 65-M 22	3	6	1.5	65	22	23	8.3	25	9	44	0.3	4.5
- 85-M 42	3	6	1.5	85	42	23	10.4	25	9	64	0.3	9.1
-100-M 42	3	6	1.5	100	42	38	10.4	25	9	78	0.3	9.3
-SLRA3- 65-M 22	3	7.5	2.25	65	22	23	9.8	25	9	44	0.3	2.7
- 85-M 42	3	7.5	2.25	85	42	23	11.9	25	9	64	0.3	5.3
-SLFB3- 65-M 22	3	9.5	3.25	65	22	23	11.8	25	9	44	0.3	1.2
- 85-M 42	3	9.5	3.25	85	42	23	13.9	25	9	64	0.3	3.2
-SLSA4- 60	4	7	1.5	60	22	18	9.3	20	12	44	0.2	3.8
- 65-M 22	4	7	1.5	65	22	23	9.3	25	12	44	0.3	3.5
- 80	4	7	1.5	80	42	18	11.4	20	12	64	0.2	7.5
- 85-M 42	4	7	1.5	85	42	23	11.4	25	12	64	0.3	7.1
-100-M 42	4	7	1.5	100	42	38	11.4	25	12	78	0.3	7.4
-SLRA4- 65-M 22	4	10	3	65	22	23	12.3	25	12	44	0.3	1.7
- 85-M 42	4	10	3	85	42	23	14.4	25	12	64	0.3	3.1
-SLFB4- 65-M 22	4	12	4	65	22	23	14.3	25	12	44	0.3	1.3
- 85-M 42	4	12	4	85	42	23	16.4	25	12	64	0.3	2.2
-SLSA6- 65-M 22	6	9	1.5	65	22	23	11.3	25	18	44	0.3	2.3
- 80	6	9	1.5	80	42	18	13.4	20	18	54	0.2	5.1
- 85-M 42	6	9	1.5	85	42	23	13.4	25	18	64	0.3	4.8
-100-M 42	6	9	1.5	100	42	38	13.4	25	18	78	0.3	5.1
-SLRA6- 60	6	12	3	60	22	18	14.3	26	18	39	0.3	1.3
- 65-M 22	6	12	3	65	22	23	14.3	25	18	44	0.3	1.3
- 85-M 42	6	12	3	85	42	23	16.4	25	18	64	0.3	2.4
-SLFB6- 70-M 22	6	14	4	70	22	28	16.3	32	18	48	0.4	1
- 90-M 42	6	14	4	90	42	28	18.4	32	18	68	0.4	1.6

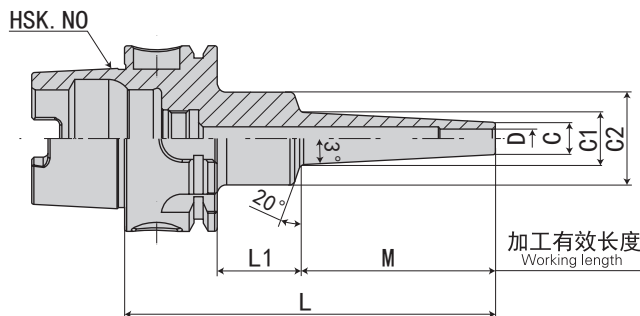



规格说明:

HSK40A - SLSA - 3 - 65 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK40A-SL 热缩刀柄（3°一体型）

HSK40A-SL SHRINK FIT HOLDER(3° MONO)

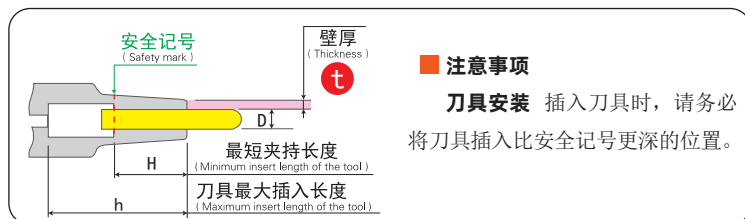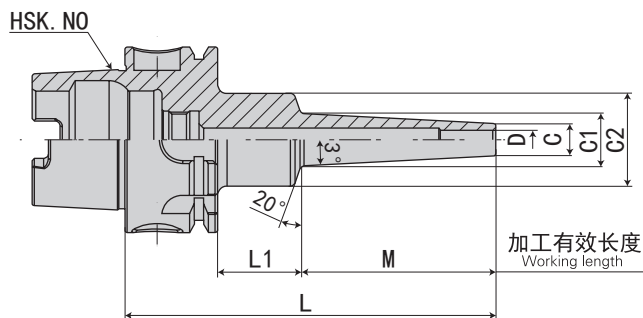

型号 Model	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
HSK40A-SLSA8- 65-M 22	8	11	1.5	65	22	23	13.3	25	24	44	0.3	1.6
- 85-M 42	8	11	1.5	85	42	23	15.4	25	24	64	0.3	3.4
-100-M 42	8	11	1.5	100	42	38	15.4	25	24	78	0.3	3.8
-SLRA8- 65-M 22	8	14	3	65	22	23	16.3	25	24	44	0.3	1.1
- 85-M 42	8	14	3	85	42	23	18.4	25	24	64	0.3	2
-SLFB8- 70-M 22	8	18	5	70	22	28	20.3	32	24	48	0.4	0.7
- 90-M 42	8	18	5	90	42	28	22.4	32	24	68	0.4	1.1
-SLSA10- 65-M 22	10	13	1.5	65	22	23	15.3	25	30	44	0.3	1.2
- 85-M 42	10	13	1.5	85	42	23	17.4	25	30	64	0.3	2.6
- 90	10	13	1.5	90	42	28	17.4	26	30	64	0.3	2.6
-100-M 42	10	13	1.5	100	42	38	17.4	25	30	78	0.3	3
-SLRA10- 65	10	16	3	65	22	23	18.3	26	25	44	0.3	0.9
- 65-M 22	10	16	3	65	22	23	18.3	25	30	44	0.3	1
- 90-M 42	10	16	3	90	42	28	20.4	32	30	69	0.4	1.5
-SLFB10- 70-M 22	10	22	6	70	22	28	24.3	32	30	48	0.4	0.6
- 90-M 42	10	22	6	90	42	28	26.4	32	30	68	0.5	0.9
-SLSA12- 65-M 22	12	15	1.5	65	22	23	17.3	25	30	44	0.3	1.1
- 90-M 42	12	15	1.5	90	42	28	19.4	32	30	68	0.4	1.9
-SLRA12- 65-M 22	12	20	4	65	22	23	22.3	25	30	44	0.3	0.8
-SLFB12- 70-M 22	12	26	7	70	22	28	28.3	32	30	48	0.4	0.6
-SLRA16- 65-M 22	16	26	5	65	22	23	28.3	33.5	32	43	0.4	0.5
-SLRA20- 70-M 50	20	32	6	70	50	*	33.5	*	38	48	0.4	0.6





规格说明:

HSK40A - **SLSA** - **8** - **65** - **M22**

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK50A-SL 热缩刀柄 (3°一体型)

HSK50A-SL SHRINK FIT HOLDER(3° MONO)

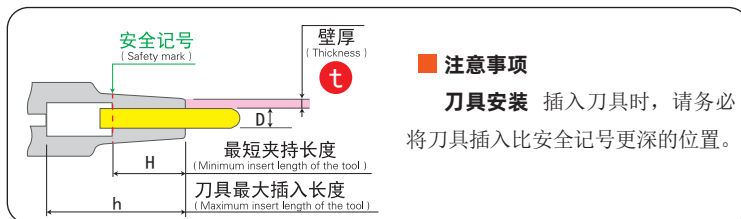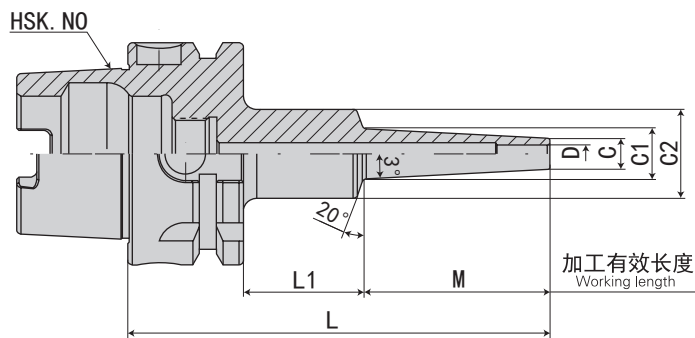

型号 Model	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
HSK50A-SLSA3- 95-M 42	3	6	1.5	95	42	27	10.4	25	9	71	0.5	9.1
-125-M 42	3	6	1.5	125	42	57	10.4	25	9	101	0.6	9.8
-SLRA3- 75-M 22	3	7.5	2.25	75	22	27	9.8	25	9	51	0.5	2.8
- 95-M 42	3	7.5	2.25	95	42	27	11.9	25	9	71	0.5	5.3
-125-M 42	3	7.5	2.25	125	42	57	11.9	25	9	101	0.6	6
-SLSA4- 95-M 42	4	7	1.5	95	42	27	11.4	25	12	71	0.5	7.2
-125-M 42	4	7	1.5	125	42	57	11.4	25	12	101	0.6	7.9
-SLRA4- 75-M 22	4	10	3	75	22	27	12.3	25	12	51	0.5	1.7
- 95-M 42	4	10	3	95	42	27	14.4	25	12	71	0.5	3.1
-125-M 42	4	10	3	125	42	57	14.4	25	12	101	0.6	3.8
-SLSA6- 95-M 42	6	9	1.5	95	42	27	13.4	25	18	71	0.5	4.8
-125-M 42	6	9	1.5	15	42	57	13.4	25	18	101	0.6	5.6
-SLRB6- 75-M 22	6	14	4	75	22	27	16.3	32	18	50	0.5	1
- 95-M 42	6	14	4	95	42	27	18.4	32	18	70	0.6	1.6
-125-M 42	6	14	4	125	42	57	18.4	32	18	100	0.7	1.9
-SLSA8- 95-M 42	8	11	1.5	95	42	27	15.4	25	24	71	0.5	3.4
-125-M 42	8	11	1.5	125	42	57	15.4	25	24	101	0.6	4.4
-SLRB8- 75-M 22	8	18	5	75	22	27	20.3	32	24	50	0.6	0.7
- 95-M 42	8	18	5	95	42	27	22.4	32	24	70	0.6	1.1
-125-M 42	8	18	5	125	42	57	22.4	32	24	100	0.8	1.5
-SLSA10- 95-M 42	10	13	1.5	95	42	27	17.4	25	30	71	0.5	2.6
-125-M 42	10	13	1.5	125	42	57	17.4	25	30	101	0.6	3.7
-SLRB10- 75-M 22	10	22	6	75	22	27	24.3	32	30	50	0.6	0.6
- 95-M 42	10	22	6	95	42	27	26.4	32	30	70	0.6	0.9
-125-M 42	10	22	6	125	42	57	26.4	32	30	100	0.8	1.3
-SLRB12- 75-M 22	12	26	7	75	22	27	28.3	42	30	52	0.7	0.4
- 95-M 42	12	26	7	95	42	27	30.4	42	30	72	0.8	0.6
-125-M 42	12	26	7	125	42	57	30.4	42	30	98	1	0.8
-SLRB16- 75-M 22	16	32	8	75	22	27	34.3	42	32	52	0.7	0.4
-105-M 22	16	32	8	105	22	57	34.3	42	32	78	1	0.5
-SLRB20- 75-M 22*	20	38	9	75	22	27	40.3	49	40	51	0.8	0.3
-105-M 22*	20	38	9	105	22	57	40.3	49	40	76	1.2	0.4

规格说明:



HSK50A - SLSA - 3 - 95 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

* 使用电磁 5000S 加热器对 SLRB20 加热时, 所使用加热圈号码不同。请使用加热线圈 NO.4 进行加热。

·HSK63A-SL 热缩刀柄（3°一体型）

HSK63A-SL SHRINK FIT HOLDER(3° MONO)

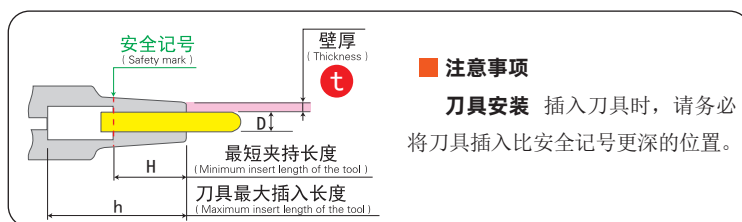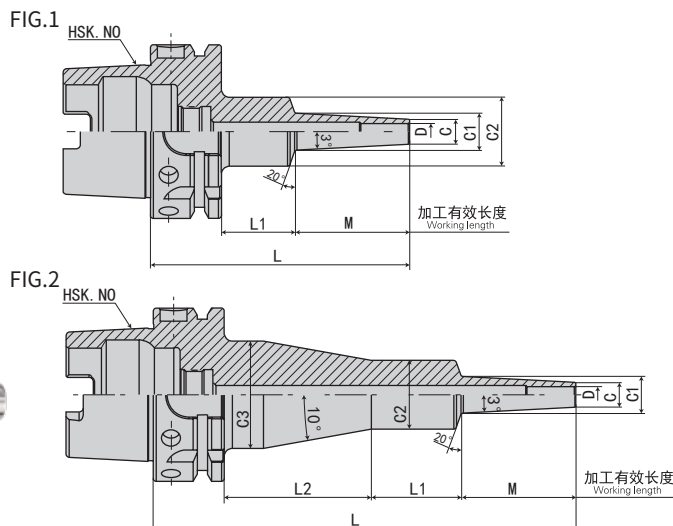

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK63A-SLSA3- 95-M 42	1	3	6	1.5	95	42	27	*	10.4	25	*	9	70	0.7	9.1
-120-M 67	1	3	6	1.5	120	67	27	*	13	25	*	9	95	0.8	14.7
-125-M 42	1	3	6	1.5	125	42	57	*	10.4	25	*	9	100	0.8	9.8
-150-M 67	1	3	6	1.5	150	67	57	*	13	25	*	9	125	0.8	15.8
-M 97	1	3	6	1.5	150	97	27	*	16.2	25	*	9	125	0.8	20.5
-155-M 42	2	3	6	1.5	155	42	33	54	10.4	26	40	9	130	1.2	9.9
-180-M 67	2	3	6	1.5	180	67	33	54	13	25	39	9	155	1.1	15.7
-M 97	1	3	6	1.5	180	97	57	*	16.2	25	*	9	155	0.9	22.2
-210-M 97	2	3	6	1.5	210	97	33	54	16.2	25	39	9	185	1.2	22.1
-SLRA3- 75-M 22	1	3	7.5	2.25	75	22	27	*	9.8	25	*	9	50	0.7	2.8
- 95-M 42	1	3	7.5	2.25	95	42	27	*	11.9	25	*	9	70	0.7	5.3
-105-M 22	1	3	7.5	2.25	105	22	57	*	9.8	25	*	9	80	0.8	3.2
-120-M 67	1	3	7.5	2.25	120	67	27	*	14.5	25	*	9	95	0.8	8.8
-125-M 42	1	3	7.5	2.25	125	42	57	*	11.9	25	*	9	100	0.8	6
-135-M 22	2	3	7.5	2.25	135	22	33	54	9.8	25	39	9	110	1.1	3.2
-150-M 67	1	3	7.5	2.25	150	67	57	*	14.5	25	*	9	125	0.9	9.9
-M 97	1	3	7.5	2.25	150	97	27	*	17.7	25	*	9	125	0.8	12.9
-155-M 42	2	3	7.5	2.25	155	42	33	54	11.9	25	39	9	130	1.1	6
-180-M 67	2	3	7.5	2.25	180	67	33	54	14.5	26	40	9	155	1.2	9.8
-M 97	1	3	7.5	2.25	180	97	57	*	17.7	25	*	9	155	0.9	14.6
-M127	1	3	7.5	2.25	180	127	27	*	20.8	36	*	9	155	0.9	15.7
-210-M 97	2	3	7.5	2.25	210	97	33	54	17.7	25	39	9	185	1.2	14.4
-M127	1	3	7.5	2.25	210	127	57	*	20.8	32	*	9	184	1.1	16.6
-240-M127	2	3	7.5	2.25	240	127	30	54	20.8	32	46	9	214	1.5	16.5




规格说明:

HSK63A - SLSA - 3 - 95 - M42

锥柄形式 Taper size
功能代号 Holder type
刀杆直径 Diameter
L 长度 Length (L)
加工有效长度 Working length

·HSK63A-SL 热缩刀柄（3°一体型）

HSK63A-SL SHRINK FIT HOLDER(3° MONO)

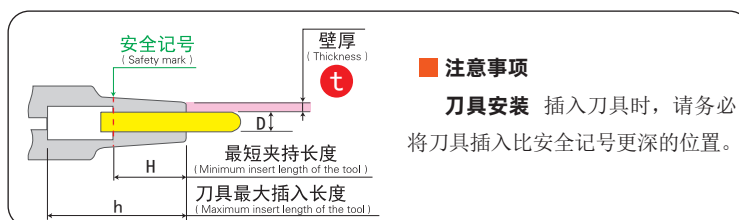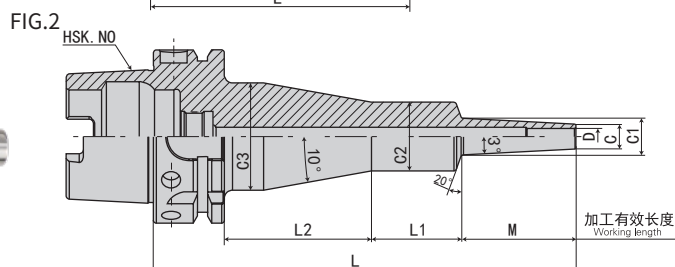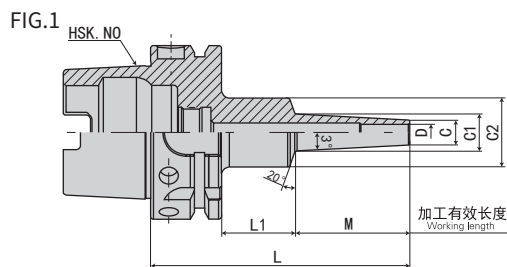

■ 注意事项

刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK63A-SLFB3- 75-M 22	1	3	9.5	3.25	75	22	27	*	11.8	25	*	9	50	0.7	1.9
- 95-M 42	1	3	9.5	3.25	95	42	27	*	13.9	25	*	9	70	0.8	3.2
-105-M 22	1	3	9.5	3.25	105	22	57	*	11.8	26	*	9	80	0.9	2.3
-120-M 67	1	3	9.5	3.25	120	67	27	*	16.5	25	*	9	95	0.8	5.3
-125-M 42	1	3	9.5	3.25	125	42	57	*	13.9	26	*	9	100	0.9	3.8
-135-M 22	2	3	9.5	3.25	135	22	33	54	11.8	25	39	9	110	1.1	2.3
-150-M 67	1	3	9.5	3.25	150	67	57	*	16.5	25	*	9	125	0.9	6.4
-155-M 42	2	3	9.5	3.25	155	42	33	54	13.9	25	39	9	130	1.1	3.9
-180-M 67	2	3	9.5	3.25	180	67	33	54	16.5	25	39	9	155	1.2	6.4
-SLSA4- 95-M 42	1	4	7	1.5	95	42	27	*	11.4	25	*	12	70	0.7	7.2
-120-M 67	1	4	7	1.5	120	67	27	*	14	25	*	12	95	0.8	11.7
-125-M 42	1	4	7	1.5	125	42	57	*	11.4	25	*	12	100	0.8	7.9
-150-M 67	1	4	7	1.5	150	67	57	*	14	25	*	12	125	0.9	12.8
-M 97	1	4	7	1.5	150	97	27	*	17.2	25	*	12	125	0.8	16.6
-155-M 42	2	4	7	1.5	155	42	33	54	11.4	25	39	12	130	1.1	7.9
-180-M 67	2	4	7	1.5	180	67	33	54	14	25	39	12	155	1.1	12.8
-M 97	1	4	7	1.5	180	97	57	*	17.2	25	*	12	155	0.9	18.4
-210-M 97	2	4	7	1.5	210	97	33	54	17.2	25	39	12	185	1.2	18.2
-SLRA 4- 75-M 22	1	4	10	3	75	22	27	*	12.3	25	*	12	50	0.7	1.7
- 95-M 42	1	4	10	3	95	42	27	*	14.4	25	*	12	70	0.8	3.1
-105-M 22	1	4	10	3	105	22	57	*	12.3	25	*	12	80	0.8	2.2
-120-M 67	1	4	10	3	120	67	27	*	17	25	*	12	95	0.8	5.1
-125-M 42	1	4	10	3	125	42	57	*	14.4	25	*	12	100	0.8	3.8
-135-M 22	2	4	10	3	135	22	33	54	12.3	25	39	12	110	1.1	2.2
-150-M 67	1	4	10	3	150	67	57	*	17	25	*	12	125	0.9	6.3
-M 97	1	4	10	3	150	97	27	*	20.2	25	*	12	124	0.8	7.7



规格说明:

HSK63A - SLFB - 3 - 75 - M22

- 锥柄形式 Taper size
- 功能代号 holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK63A-SL 热缩刀柄（3°一体型）

HSK63A-SL SHRINK FIT HOLDER(3° MONO)

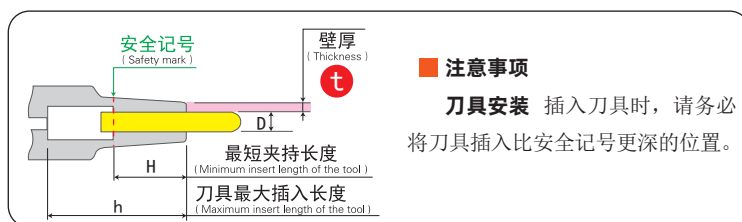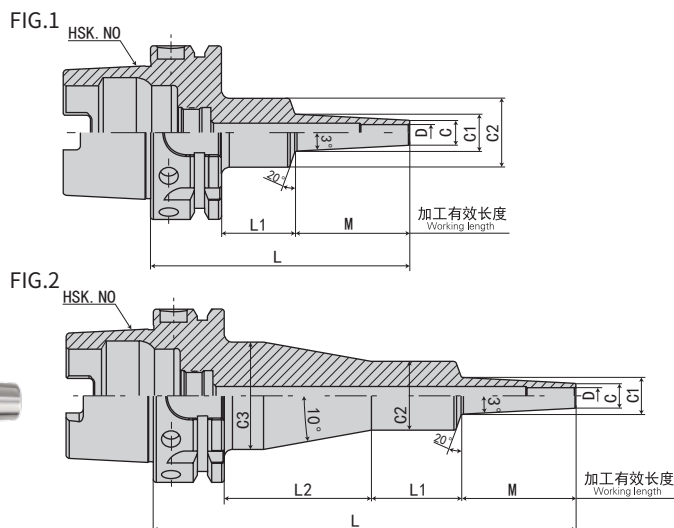

■ 注意事项

刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK63A-SLRA4-155-M 42	2	4	10	3	155	42	33	54	14.4	25	39	12	130	1.1	3.8
-180-M 67	2	4	10	3	180	67	33	54	17	25	39	12	155	1.2	6.2
-M 97	1	4	10	3	180	97	57	*	20.2	25	*	12	154	0.9	9.5
-M127	1	4	10	3	180	127	27	*	23.3	32	*	12	154	1	9.4
-210-M 97	2	4	10	3	210	97	33	54	20.2	25	39	12	184	1.2	9.4
-M127	1	4	10	3	210	127	57	*	23.3	32	*	12	184	1.1	10.4
-240-M127	2	4	10	3	240	127	30	57	23.3	32	46	12	214	1.5	10.3
-SLFB4- 75-M 22	1	4	12	4	75	22	27	*	14.3	25	*	12	50	0.7	1.3
- 95-M42	1	4	12	4	95	42	27	*	16.4	25	*	12	70	0.8	2.2
-105-M22	1	4	12	4	105	22	57	*	14.3	25	*	12	80	0.8	1.8
-120-M67	1	4	12	4	120	67	27	*	19	25	*	12	95	0.8	3.6
-125-M42	1	4	12	4	125	42	57	*	16.4	25	*	12	100	0.9	2.9
-135-M22	2	4	12	4	135	22	33	54	14.3	25	39	12	110	1.1	1.8
-150-M67	1	4	12	4	150	67	57	*	19	25	*	12	125	0.9	4.7
-155-M42	2	4	12	4	155	42	33	54	16.4	25	39	12	130	1.1	2.9
-180-M67	2	4	12	4	180	67	33	54	19	25	39	12	155	1.2	4.6
-SLSA6- 95-M 42	1	6	9	1.5	95	42	27	*	13.4	25	*	18	70	0.7	4.8
-120-M 67	1	6	9	1.5	120	67	27	*	16	25	*	18	95	0.8	8
-125-M 42	1	6	9	1.5	125	42	57	*	13.4	25	*	18	100	0.8	5.6
-150-M 67	1	6	9	1.5	150	67	57	*	16	25	*	18	125	0.9	9.3
-M 97	1	6	9	1.5	150	97	27	*	19.2	32	*	18	124	0.9	11
-155-M 42	2	6	9	1.5	155	42	33	54	13.4	25	39	18	130	1.1	5.6
-180-M 67	2	6	9	1.5	180	67	33	54	16	25	39	18	155	1.1	9.2
-M 97	1	6	9	1.5	180	97	57	*	19.2	32	*	18	154	1	11.7
-210-M 97	2	6	9	1.5	210	97	30	57	19.2	32	46	18	184	1.4	11.7

规格说明:

HSK63A - SLRA - 4 - 155 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK63A-SL 热缩刀柄 (3°一体型)

HSK63A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



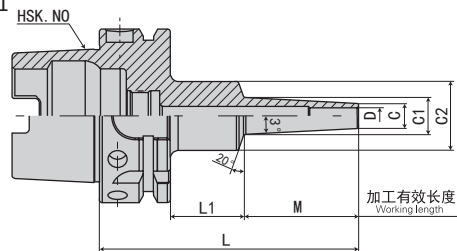


FIG.2

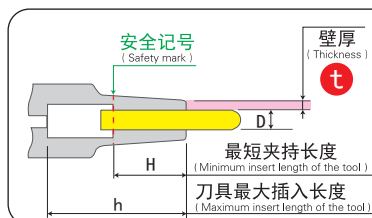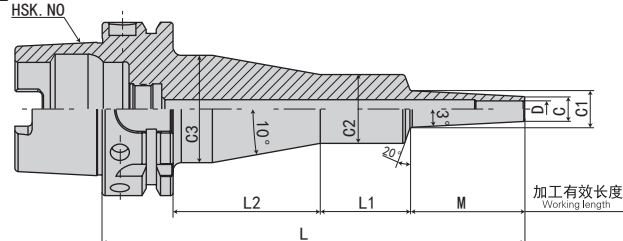

■ 注意事项

刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK63A-SLSB6- 95-M 42	1	6	10	2	95	42	27	*	14.4	25	*	18	70	0.7	3.7
-120-M 67	1	6	10	2	120	67	27	*	17	25	*	18	95	0.8	6.2
-125-M 42	1	6	10	2	125	42	57	*	14.4	25	*	18	100	0.8	4.5
-150-M 67	1	6	10	2	150	67	57	*	17	25	*	18	125	0.9	7.4
-M 97	1	6	10	2	150	97	27	*	20.2	32	*	18	124	0.9	8.5
-155-M 42	2	6	10	2	155	42	33	54	14.4	25	39	18	130	1.1	4.4
-180-M 67	2	6	10	2	180	67	33	54	17	25	39	18	155	1.1	7.3
-M 97	1	6	10	2	180	97	57	*	20.2	32	*	18	154	1	9.2
-M127	1	6	10	2	180	127	27	*	23.3	32	*	18	154	0.9	11
-210-M 97	2	6	10	2	210	97	30	57	20.2	32	46	18	184	1.4	9.2
-M127	1	6	10	2	210	127	57	*	23.3	32	*	18	184	1.1	12
-M157	1	6	10	2	210	157	27	*	26.5	32	*	18	184	1.1	13.2
-240-M127	2	6	10	2	240	127	30	57	23.3	32	46	18	214	1.5	12
-M157	1	6	10	2	240	157	57	*	26.5	32	*	18	214	1.2	14.6
-270-M157	2	6	10	2	270	157	30	57	26.5	32	46	18	244	1.6	14.6
-SLRB6- 75-M 22	1	6	14	4	75	22	27	*	16.3	32	*	18	49	0.8	1
- 95-M 42	1	6	14	4	95	42	27	*	18.4	32	*	18	69	0.8	1.6
-105-M 22	1	6	14	4	105	22	57	*	16.3	32	*	18	79	0.9	1.2
-120-M 67	1	6	14	4	120	67	27	*	21	32	*	18	94	0.9	2.6
-125-M 42	1	6	14	4	125	42	57	*	18.4	32	*	18	99	1	1.9
-135-M 22	2	6	14	4	135	22	30	57	16.3	32	46	18	109	1.3	1.2
-150-M 67	1	6	14	4	150	67	57	*	21	32	*	18	124	1	3
-155-M 42	2	6	14	4	155	42	30	57	18.4	32	46	18	129	1.4	1.9
-180-M 67	2	6	14	4	180	67	30	57	21	32	46	18	154	1.4	3.1



规格说明:

HSK63A - SLSB - 6 - 95 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK63A-SL 热缩刀柄（3°一体型）

HSK63A-SL SHRINK FIT HOLDER(3° MONO)

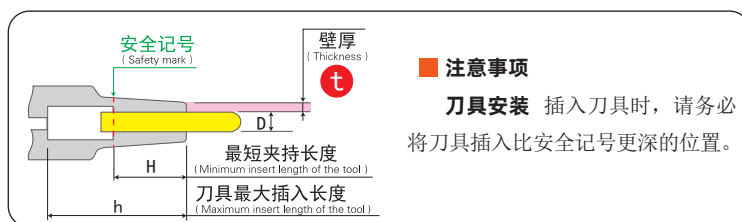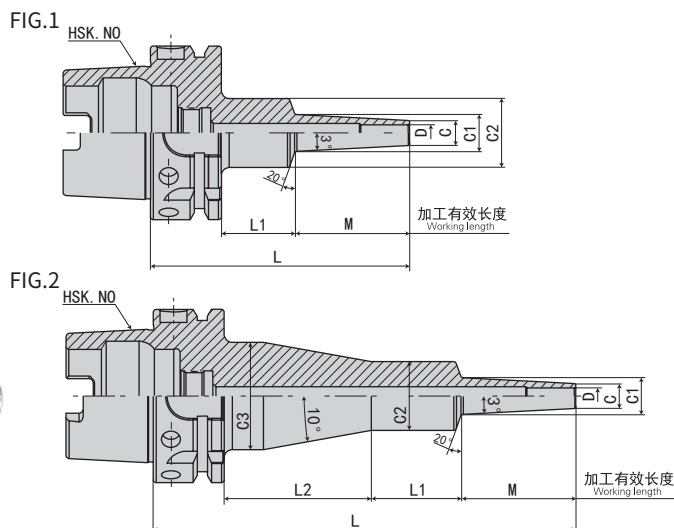

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK63A-SLFB6- 75-M 22	1	6	14	4	75	22	27	*	16.3	32	*	18	49	0.8	1
- 95-M 42	1	6	14	4	95	42	27	*	18.4	32	*	18	69	0.8	1.6
-105-M 22	1	6	14	4	105	22	57	*	16.3	32	*	18	79	0.9	1.2
-120-M 67	1	6	14	4	120	67	27	*	21	32	*	18	94	0.9	2.6
-125-M 42	1	6	14	4	125	42	57	*	18.4	32	*	18	99	1	1.9
-135-M 22	2	6	14	4	135	22	30	57	16.3	32	46	18	109	1.3	1.2
-150-M 67	1	6	14	4	150	67	57	*	21	32	*	18	124	1	3
-155-M 42	2	6	14	4	155	42	30	57	18.4	32	46	18	129	1.4	1.9
-180-M 67	2	6	14	4	180	67	30	57	21	32	46	18	154	1.4	3.1
-SLSA8- 95-M 42	1	8	11	1.5	95	42	27	*	15.4	25	*	24	70	0.7	3.4
-120-M 67	1	8	11	1.5	120	67	27	*	18	32	*	24	94	0.8	5.4
-125-M 42	1	8	11	1.5	125	42	57	*	15.4	25	*	24	100	0.8	4.3
-150-M 67	1	8	11	1.5	150	67	57	*	18	32	*	24	124	1	5.9
-M 97	1	8	11	1.5	150	97	27	*	21.2	32	*	24	124	0.9	7.9
-155-M 42	2	8	11	1.5	155	42	33	54	15.4	25	39	24	130	1.1	4.3
-180-M 67	2	8	11	1.5	180	67	30	57	18	32	46	24	154	1.4	5.9
-M 97	1	8	11	1.5	180	97	57	*	21.2	32	*	24	154	1	8.7
-210-M 97	2	8	11	1.5	210	97	30	57	21.2	32	46	24	184	1.4	8.7
-SLSB8- 95-M 42	1	8	13	2.5	95	42	27	*	17.4	32	*	24	69	0.8	2.1
-120-M 67	1	8	13	2.5	120	67	27	*	20	32	*	24	94	0.9	3.5
-125-M 42	1	8	13	2.5	125	42	57	*	17.4	32	*	24	99	1	2.4
-150-M 67	1	8	13	2.5	150	67	57	*	20	32	*	24	124	1	4
-M 97	1	8	13	2.5	150	97	27	*	23.2	32	*	24	124	0.9	5.2
-155-M 42	2	8	13	2.5	155	42	30	57	17.4	32	46	24	129	1.4	2.4
-180-M 67	2	8	13	2.5	180	67	30	57	20	32	46	24	154	1.4	4
-M 97	1	8	13	2.5	180	97	57	*	23.2	32	*	24	154	1.1	6
-M127	1	8	13	2.5	180	127	27	*	26.3	32	*	24	154	1	7

规格说明:

HSK63A - SLFB - 6 - 75 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK63A-SL 热缩刀柄（3°一体型）

HSK63A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



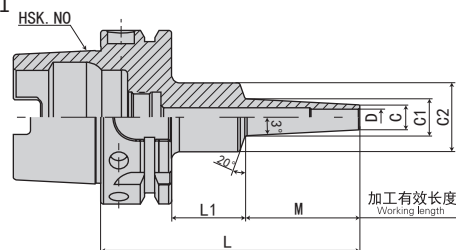


FIG.2

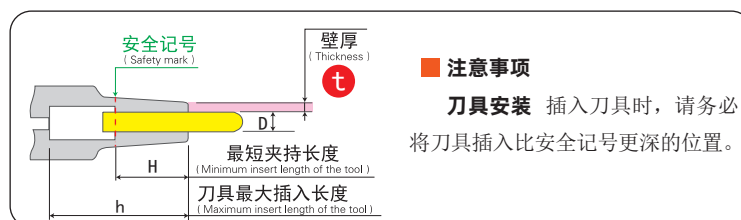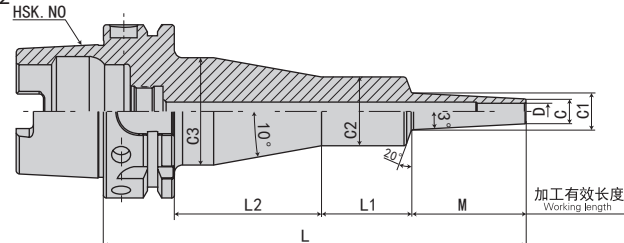

■ 注意事项

刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK63A-SLSB8-210-M 97	2	8	13	2.5	210	97	30	57	23.2	32	46	24	184	1.5	6
-M127	1	8	13	2.5	210	127	57	*	26.3	32	*	24	184	1.2	8.1
-M157	1	8	13	2.5	210	157	27	*	29.5	42	*	24	185	1.2	8
-240-M127	2	8	13	2.5	240	127	30	57	26.3	32	46	24	214	1.6	8.1
-M157	1	8	13	2.5	240	157	57	*	29.5	42	*	24	214	1.5	8.6
-270-M157	2	8	13	2.5	270	157	28	59	29.5	42	53	24	242	2	8.7
-SLRB8- 75-M 22	1	8	18	5	75	22	27	*	20.3	32	*	24	49	0.8	0.7
- 95-M 42	1	8	18	5	95	42	27	*	22.4	32	*	24	69	0.9	1.1
-105-M 22	1	8	18	5	105	22	57	*	20.3	32	*	24	79	1	0.9
-120-M 67	1	8	18	5	120	67	27	*	25	32	*	24	94	0.9	1.7
-125-M 42	1	8	18	5	125	42	57	*	22.4	32	*	24	99	1	1.4
-135-M 22	2	8	18	5	135	22	30	57	20.3	32	46	24	109	1.4	1
-150-M 67	1	8	18	5	150	67	57	*	25	32	*	24	124	1.1	2.2
-155-M 42	2	8	18	5	155	42	30	57	22.4	32	46	24	129	1.4	1.4
-180-M 67	2	8	18	5	180	67	30	57	25	32	46	24	155	1.5	2.2
-SLFB8- 75-M 22	1	8	18	5	75	22	27	*	20.3	32	*	24	49	0.8	0.7
- 95-M 42	1	8	18	5	95	42	27	*	22.4	32	*	24	69	0.9	1.1
-105-M 22	1	8	18	5	105	22	57	*	20.3	32	*	24	79	1	0.9
-120-M 67	1	8	18	5	120	67	27	*	25	32	*	24	94	0.9	1.7
-125-M 42	1	8	18	5	125	42	57	*	22.4	32	*	24	99	1	1.4
-135-M 22	2	8	18	5	135	22	30	57	20.3	32	46	24	109	1.4	1
-150-M 67	1	8	18	5	150	67	57	*	25	32	*	24	124	1.1	2.2
-155-M 42	2	8	18	5	155	42	30	57	22.4	32	46	24	129	1.4	1.4
-180-M 67	2	8	18	5	180	67	30	57	25	36	46	24	154	1.5	2.2



规格说明:

HSK63A - SLSB - 8 - 210 - M97

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length


·HSK63A-SL 热缩刀柄（3°一体型）

HSK63A-SL SHRINK FIT HOLDER(3° MONO)

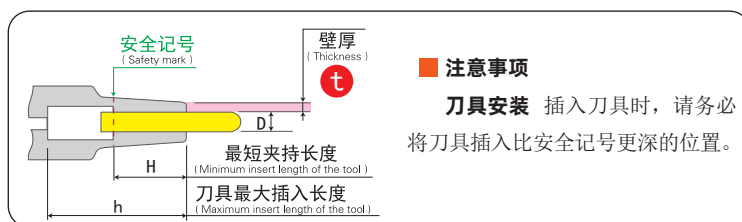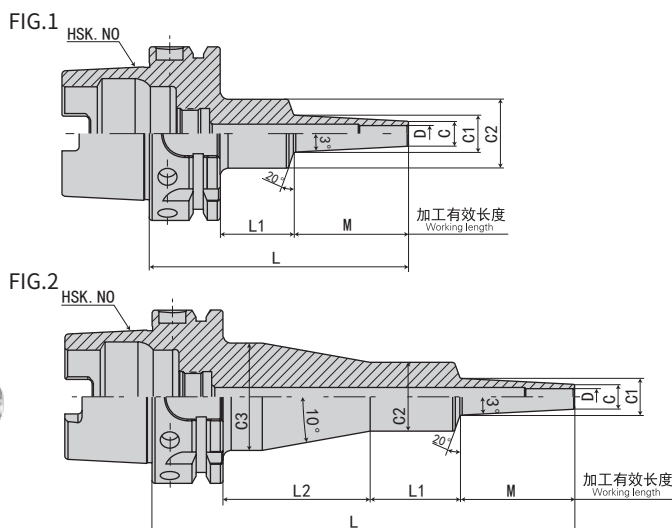

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK63A-SLSA10- 95-M 42	1	10	13	1.5	95	42	27	*	17.4	25	*	30	70	0.8	2.6
-120-M 67	1	10	13	1.5	120	67	27	*	20	32	*	30	94	0.8	4
-125-M 42	1	10	13	1.5	125	42	57	*	17.4	25	*	30	100	0.8	3.6
-150-M 67	1	10	13	1.5	150	67	57	*	20	32	*	30	124	1	4.6
-M 97	1	10	13	1.5	150	97	27	*	23.2	32	*	30	124	0.9	6
-155-M 42	2	10	13	1.5	155	42	33	54	17.4	25	39	30	130	1.1	3.5
-180-M 67	2	10	13	1.5	180	67	30	57	20	32	46	30	154	1.4	4.6
-M 97	1	10	13	1.5	180	97	57	*	23.2	32	*	30	154	1.1	6.9
-210-M 97	2	10	13	1.5	210	97	30	57	23.2	32	46	30	184	1.5	6.9
-SLSB10- 95-M 42	1	10	16	3	95	42	27	*	20.4	32	*	30	69	0.8	1.4
-120-M 67	1	10	16	3	120	67	27	*	23	32	*	30	94	0.9	2.4
-125-M 42	1	10	16	3	125	42	57	*	20.4	32	*	30	99	1	1.8
-150-M 67	1	10	16	3	150	67	57	*	23	32	*	30	124	1	3
-M 97	1	10	16	3	150	97	27	*	26.2	32	*	30	124	1	3.6
-155-M 42	2	10	16	3	155	42	30	57	20.4	32	46	30	129	1.4	1.8
-180-M 67	2	10	16	3	180	67	30	57	23	32	46	30	154	1.4	3
-M 97	1	10	16	3	180	97	57	*	26.2	32	*	30	154	1.1	4.5
-M127	1	10	16	3	180	127	27	*	29.3	42	*	30	155	1.2	4.5
-210-M 97	2	10	16	3	210	97	30	57	26.2	32	46	30	184	1.5	4.5
-M127	1	10	16	3	210	127	57	*	29.3	42	*	30	182	1.4	4.9
-M157	1	10	16	3	210	157	27	*	32.5	42	*	30	185	1.3	5.6
-240-M127	2	10	16	3	240	127	28	59	29.3	42	53	30	212	1.9	5.0
-M157	1	10	16	3	240	157	57	*	32.5	42	*	30	215	1.8	5.8
-270-M157	2	10	16	3	270	157	28	59	32.5	42	53	30	242	2.1	6.2

规格说明:

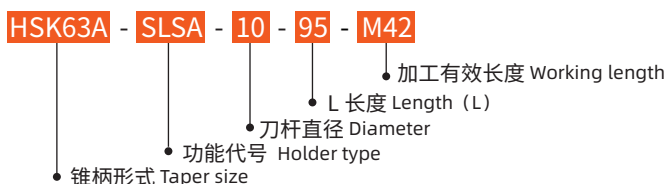

·HSK63A-SL 热缩刀柄（3°一体型）

HSK63A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



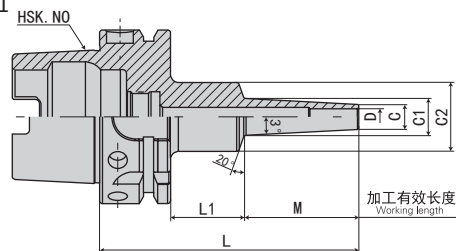


FIG.2

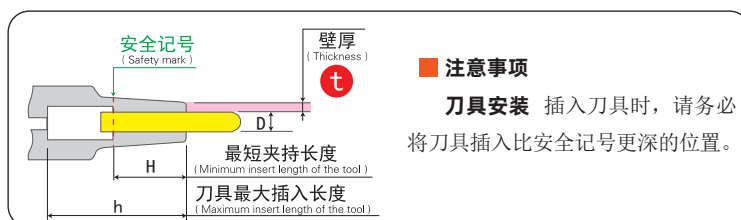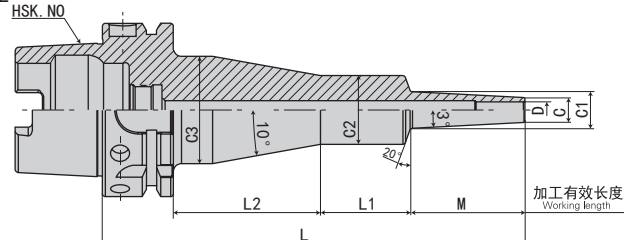

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK63A-SLRB10- 75-M 22	1	10	22	6	75	22	27	*	24.3	32	*	30	49	0.8	0.6
- 95-M 42	1	10	22	6	95	42	27	*	26.4	32	*	30	68	0.9	0.8
-105-M 22	1	10	22	6	105	22	57	*	24.3	32	*	30	79	1	0.8
-120-M 67	1	10	22	6	120	67	27	*	29	42	*	30	94	1.1	1.1
-125-M 42	1	10	22	6	125	42	57	*	26.4	32	*	30	99	1.1	1.2
-135-M 22	2	10	22	6	135	22	30	57	24.3	32	46	30	109	1.4	0.9
-150-M 67	1	10	22	6	150	67	57	*	29	42	*	30	124	1.3	1.3
-155-M 42	2	10	22	6	155	42	30	57	26.4	32	46	30	129	1.5	1.2
-180-M 67	2	10	22	6	180	67	28	59	29	42	53	30	154	1.8	1.3
-SLFB10- 75-M 22	1	10	22	6	75	22	27	*	24.3	32	*	30	49	0.8	0.6
- 95-M 42	1	10	22	6	95	42	27	*	26.4	32	*	30	69	0.9	0.8
-105-M 22	1	10	22	6	105	22	57	*	24.3	32	*	30	79	1	0.8
-120-M 67	1	10	22	6	120	67	27	*	29	42	*	30	94	1.1	1.1
-125-M 42	1	10	22	6	125	42	57	*	26.4	32	*	30	99	1.1	1.2
-135-M 22	2	10	22	6	135	22	30	57	24.3	32	46	30	109	1.4	0.9
-150-M 67	1	10	22	6	150	67	57	*	29	42	*	30	124	1.3	1.3
-155-M 42	2	10	22	6	155	42	30	57	26.4	32	46	30	129	1.5	1.2
-180-M 67	2	10	22	6	180	67	28	59	29	42	53	30	154	1.8	1.3
-SLSA12- 95-M 42	1	12	15	1.5	95	42	27	*	19.4	32	*	30	69	0.8	1.8
-120-M 67	1	12	15	1.5	120	67	27	*	22	32	*	30	94	0.8	3.3
-125-M 42	1	12	15	1.5	125	42	57	*	19.4	32	*	30	99	1	2.3
-150-M 67	1	12	15	1.5	150	67	57	*	22	32	*	30	124	1	3.9
-M 97	1	12	15	1.5	150	97	27	*	25.2	32	*	30	124	0.9	4.9
-155-M 42	2	12	15	1.5	155	42	30	57	19.4	32	46	30	129	1.4	2.3
-180-M 67	2	12	15	1.5	180	67	30	57	22	32	46	30	154	1.4	3.9
-M 97	1	12	15	1.5	180	97	57	*	25.2	32	*	30	154	1.1	5.8
-210-M 97	2	12	15	1.5	210	97	30	57	25.2	32	46	30	184	1.5	5.8



规格说明:

HSK63A - SLRB - 10 - 75 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK63A-SL 热缩刀柄（3°一体型）

HSK63A-SL SHRINK FIT HOLDER(3° MONO)

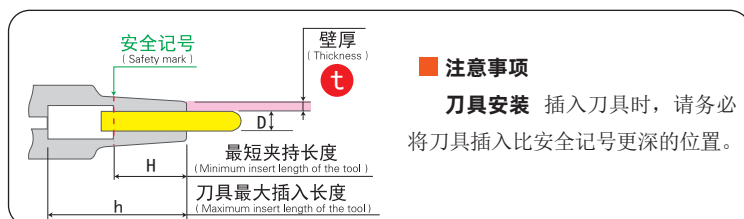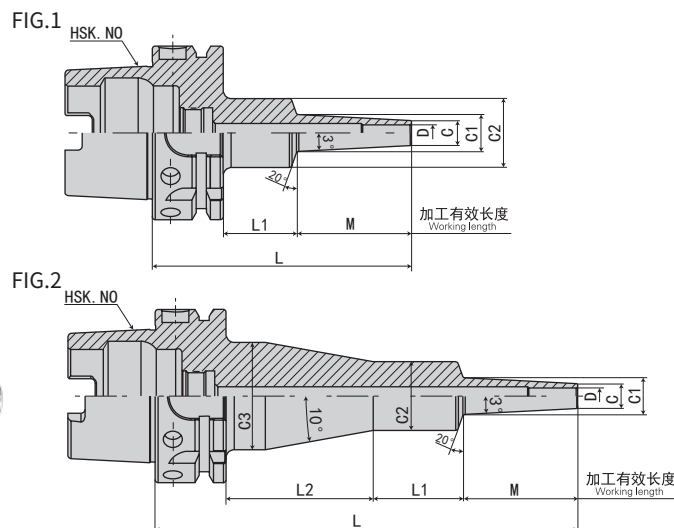

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK63A-SLSB12- 95-M 42	1	12	19	3.5	95	42	27	*	23.4	32	*	30	69	0.8	1.1
-120-M 67	1	12	19	3.5	120	67	27	*	26	32	*	30	94	0.9	1.8
-125-M 42	1	12	19	3.5	125	42	57	*	23.4	32	*	30	99	1	1.5
-150-M 67	1	12	19	3.5	150	67	57	*	26	32	*	30	124	1.1	2.5
-M 97	1	12	19	3.5	150	97	27	*	29.2	42	*	30	125	1.1	2.4
-155-M 42	2	12	19	3.5	155	42	30	57	23.4	32	46	30	129	1.4	1.6
-180-M 67	2	12	19	3.5	180	67	30	57	26	32	46	30	154	1.5	2.5
-M 97	1	12	19	3.5	180	97	57	*	29.2	42	*	30	152	1.4	2.8
-M127	1	12	19	3.5	180	127	27	*	32.3	42	*	30	155	1.3	3.3
-210-M 97	1	12	19	3.5	210	97	87	*	29.2	50	*	30	180	1.9	2.8
-M127	1	12	19	3.5	210	127	57	*	32.3	50	*	30	180	1.7	3.5
-M157	1	12	19	3.5	210	157	27	*	35.5	42	*	30	185	1.4	4.1
-240-M127	1	12	19	3.5	240	127	87	*	32.3	50	*	30	215	2.1	3.8
-M157	1	12	19	3.5	240	157	57	*	35.5	42	*	30	212	1.7	4.7
-270-M157	2	12	19	3.5	270	157	28	59	35.5	42	53	30	242	2.2	4.8
-SLRB12- 75-M 22	1	12	26	7	75	22	27	*	28.3	42	*	30	50	0.9	0.4
- 95-M 42	1	12	26	7	95	42	27	*	30.4	42	*	30	70	1	0.6
-105-M 22	1	12	26	7	105	22	57	*	28.3	42	*	30	77	1.2	0.5
-120-M 67	1	12	26	7	120	67	27	*	33	42	*	30	95	1.2	0.8
-125-M 42	1	12	26	7	125	42	57	*	30.4	42	*	30	97	1.3	0.7
-135-M 22	2	12	26	7	135	22	28	59	28.3	42	53	30	107	1.7	0.6
-150-M 67	1	12	26	7	150	67	57	*	33	42	*	30	122	1.4	1.1
-155-M 42	2	12	26	7	155	42	28	59	30.4	42	53	30	127	1.8	0.8
-180-M 67	2	12	26	7	180	67	28	59	33	42	53	30	152	1.9	1.1

规格说明:

HSK63A - SLSB - 12 - 95 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK63A-SL 热缩刀柄 (3°一体型)

HSK63A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



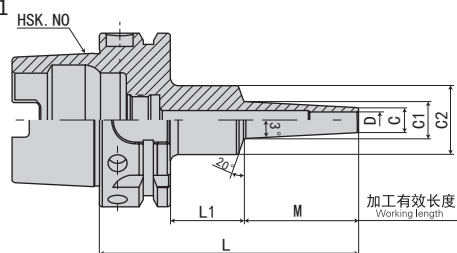


FIG.2

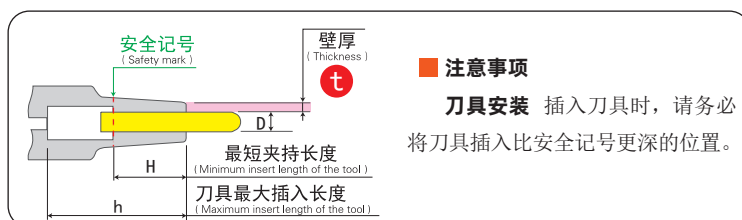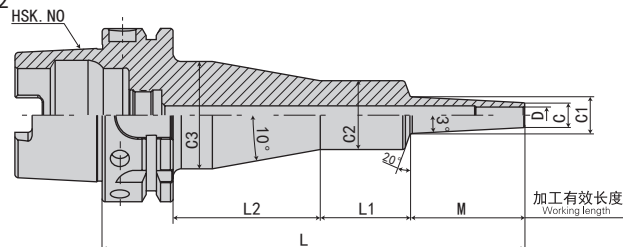

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK63A-SLFB12- 75-M 22	1	12	26	7	75	22	27	*	28.3	42	*	30	50	0.9	0.4
- 95-M 42	1	12	26	7	95	42	27	*	30.4	42	*	30	70	1	0.6
-105-M 22	1	12	26	7	105	22	57	*	28.3	42	*	30	77	1.2	0.5
-120-M 67	1	12	26	7	120	67	27	*	33	42	*	30	95	1.2	0.8
-125-M 42	1	12	26	7	125	42	57	*	30.4	42	*	30	97	1.3	0.7
-135-M 22	2	12	26	7	135	22	28	59	28.3	42	53	30	107	1.7	0.6
-150-M 67	1	12	26	7	150	67	57	*	33	42	*	30	122	1.4	1.1
-155-M 42	1	12	26	7	155	42	28	59	30.4	42	53	30	127	1.8	0.8
-180-M 67	2	12	26	7	180	67	28	59	33	42	53	30	152	1.9	1.1
-SLSB16- 95-M 42	1	16	24	4	95	42	27	*	28.4	42	*	32	70	1	0.7
-120-M 67	1	16	24	4	120	67	27	*	31	42	*	32	95	1.1	1.1
-125-M 42	1	16	24	4	125	42	57	*	28.4	42	*	32	97	1.2	0.9
-150-M 67	1	16	24	4	150	67	57	*	31	42	*	32	122	1.3	1.4
-M 97	1	16	24	4	150	97	27	*	34.2	42	*	32	125	1.2	1.7
-155-M 42	1	16	24	4	155	42	87	*	28.4	50	*	32	130	1.7	0.9
-180-M 67	2	16	24	4	180	67	28	59	31	42	53	32	152	1.8	1.5
-M 97	1	16	24	4	180	97	57	*	34.2	42	*	32	152	1.4	2.1
-M127	1	16	24	4	180	127	27	*	37.3	53	*	32	155	1.5	2.1
-210-M 97	2	16	24	4	210	97	28	59	34.2	42	53	32	182	2	2.1
-M127	1	16	24	4	210	127	57	*	37.3	53	*	32	181	1.9	2.3
-M157	1	16	24	4	210	157	27	*	40.5	53	*	32	185	1.7	2.7
-240-M127	1	16	24	4	240	127	87	*	37.3	53	*	32	211	2.3	2.6
-M157	1	16	24	4	240	157	57	*	40.5	53	*	32	215	2.1	2.9
-270-M157	1	16	24	4	270	157	87	*	40.5	53	*	32	241	2.5	3.2



规格说明:

HSK63A - SLFB - 12 - 75 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK63A-SL 热缩刀柄（3°一体型）

HSK63A-SL SHRINK FIT HOLDER(3° MONO)

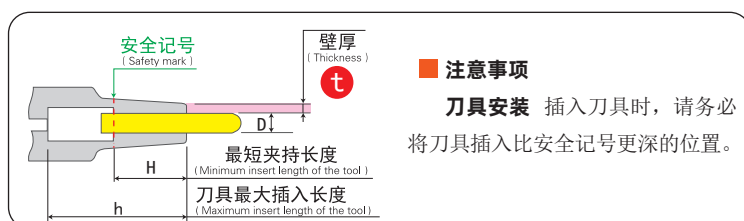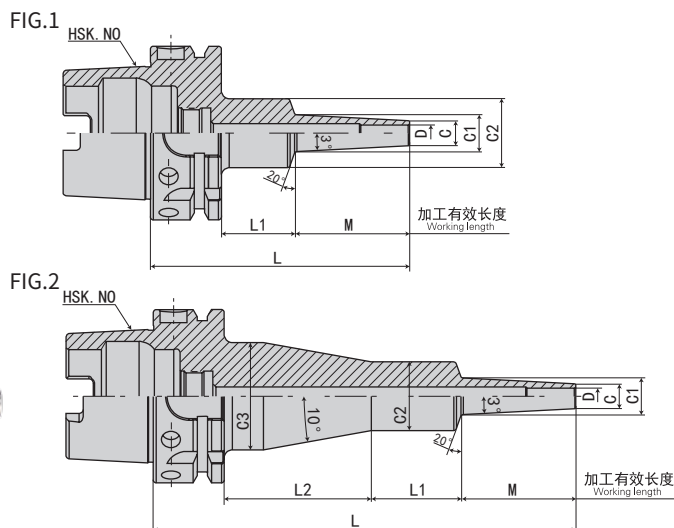

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK63A-SLRB16- 75-M 22	1	16	32	8	75	22	27	*	34.3	42	*	32	50	1	0.3
- 95-M 42	1	16	32	8	95	42	27	*	36.4	42	*	32	70	1.1	0.5
-105-M 22	1	16	32	8	105	22	57	*	34.3	42	*	32	77	1.2	0.5
-120-M 67	1	16	32	8	120	67	27	*	39	42	*	32	95	1.3	0.7
-125-M 42	1	16	32	8	125	42	57	*	36.4	42	*	32	97	1.3	0.7
-135-M 22	2	16	32	8	135	22	28	59	34.3	42	53	32	107	1.7	0.5
-150-M 67	1	16	32	8	150	67	57	*	39	42	*	32	122	1.5	0.9
-155-M 42	2	16	32	8	155	42	28	59	36.4	42	53	32	127	1.9	0.7
-180-M 67	2	16	32	8	180	67	28	59	39	42	53	32	152	2	1
-SLFB16- 75-M 22	1	16	32	8	75	22	27	*	34.3	42	*	32	50	1	0.3
- 95-M 42	1	16	32	8	95	42	27	*	36.4	42	*	32	70	1.1	0.5
-105-M 22	1	16	32	8	105	22	57	*	34.3	42	*	32	77	1.2	0.5
-120-M 67	1	16	32	8	120	67	27	*	39	42	*	32	95	1.3	0.7
-125-M 42	1	16	32	8	125	42	57	*	36.4	42	*	32	97	1.3	0.7
-135-M 22	2	16	32	8	135	22	28	59	34.3	42	53	32	107	1.7	0.5
-150-M 67	1	16	32	8	150	67	57	*	39	50	*	32	120	1.7	0.7
-155-M 42	2	16	32	8	155	42	28	59	36.4	42	53	32	127	1.9	0.7
-180-M 67	2	16	32	8	180	67	28	59	39	42	53	32	152	2	1
-SLSB20- 95-M 42	1	20	29	4.5	95	42	27	*	33.4	42	*	40	70	1	0.5
-120-M 67	1	20	29	4.5	120	67	27	*	36	42	*	40	95	1.1	0.9
-125-M 42	1	20	29	4.5	125	42	57	*	33.4	42	*	40	97	1.2	0.8
-150-M 67	1	20	29	4.5	150	67	57	*	36	42	*	40	122	1.4	1.2
-M 97	1	20	29	4.5	150	97	27	*	39.2	53	*	40	125	1.4	1.1
-155-M 42	1	20	29	4.5	155	42	87	*	33.4	50	*	40	130	1.8	0.8
-180-M 67	2	20	29	4.5	180	67	28	59	36	42	53	40	152	1.9	1.2
-M 97	1	20	29	4.5	180	97	57	*	39.2	53	*	40	151	1.8	1.3
-M127	1	20	29	4.5	180	127	27	*	42.3	53	*	40	155	1.6	1.5



规格说明:

HSK63A - SLRB - 16 - 75 - M22

锥柄形式 Taper size
功能代号 Holder type
刀杆直径 Diameter
L 长度 Length (L)
加工有效长度 Working length

·HSK63A-SL 热缩刀柄（3°一体型）

HSK63A-SL SHRINK FIT HOLDER(3° MONO)




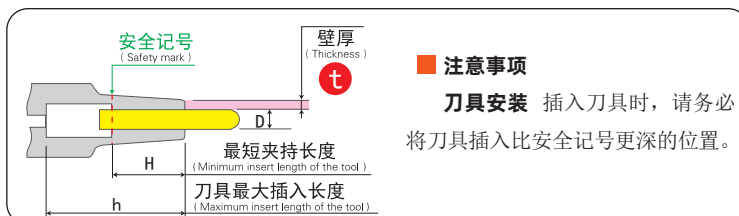
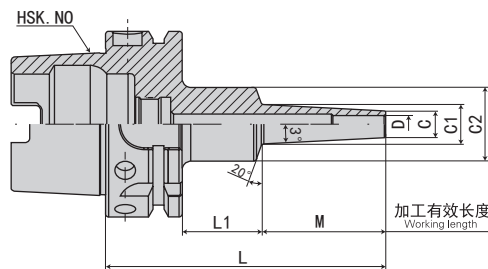


型号 Model	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
HSK63A-SLSB20-210-M 97	20	29	4.5	210	97	87	39.2	53	40	181	2.2	1.6
-M127	20	29	4.5	210	127	57	42.3	53	40	181	2	1.8
-M157	20	29	4.5	210	157	27	45.5	53	40	185	1.9	1.9
-240-M127	20	29	4.5	240	127	87	42.3	53	40	211	2.3	2.1
-M157	20	29	4.5	240	157	57	45.5	53	40	211	2.4	2.2
-270-M157	20	29	4.5	270	157	87	45.5	53	40	241	2.7	2.6
-SLRB20- 95-M 42	20	38	9	95	42	27	42.4	53	40	70	1.3	0.3
-120-M 67	20	38	9	120	67	27	45	53	40	95	1.5	0.5
-125-M 42	20	38	9	125	42	57	42.4	53	40	96	1.7	0.4
-150-M 67	20	38	9	150	67	57	45	53	40	121	1.9	0.6
-155-M 42	20	38	9	155	42	87	42.4	53	40	126	2.1	0.6
-180-M 67	20	38	9	180	67	87	45	53	40	151	2.3	0.8
-SLFB20- 95-M 42	20	38	9	95	42	27	42.4	53	40	70	1.3	0.3
-120-M 67	20	38	9	120	67	27	45	53	40	95	1.5	0.5
-125-M 42	20	38	9	125	42	57	42.4	53	40	96	1.7	0.4
-150-M 67	20	38	9	150	67	57	45	50	40	120	1.9	0.7
-155-M 42	20	38	9	155	42	87	42.4	50	40	125	2	0.6
-180-M 67	20	38	9	180	67	87	45	53	40	151	2.3	0.8
-SLRB25- 95-M 42	25	45	10	95	42	27	49.4	53	45	70	1.4	0.3
-125-M 42	25	45	10	125	42	57	49.4	53	45	96	1.8	0.4
-155-M 42	25	45	10	155	42	87	49.4	53	45	126	2.2	0.6
-SLFB25- 95-M 42	25	45	10	95	42	27	49.4	53	45	70	1.4	0.3
-125-M 42	25	45	10	125	42	57	49.4	53	45	96	1.8	0.4
-155-M 42	25	45	10	155	42	87	49.4	53	45	126	2.2	0.6
-SLRB32-110-M 42	32	54	11	110	42	42	58.4	63	50	84	1.8	0.3

规格说明:

HSK63A - SLSB - 20 - 210 - M97
 锥柄形式 Taper size
 功能代号 Holder type
 刀杆直径 Diameter
 L 长度 Length (L)
 加工有效长度 Working length

·HSK63A-SL 热缩刀柄（CV 曲线型） HSK63A-SL SHRINK FIT HOLDER(CV CURVE)

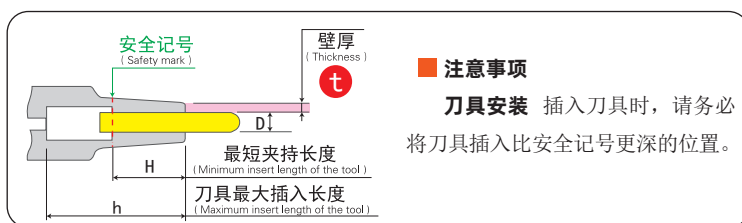
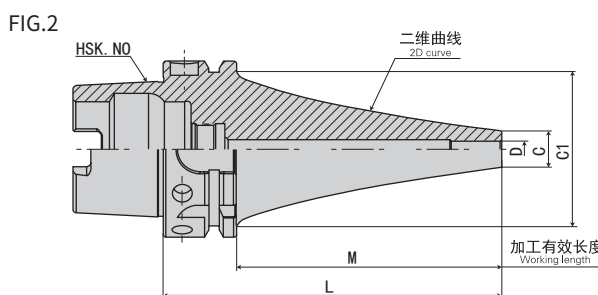
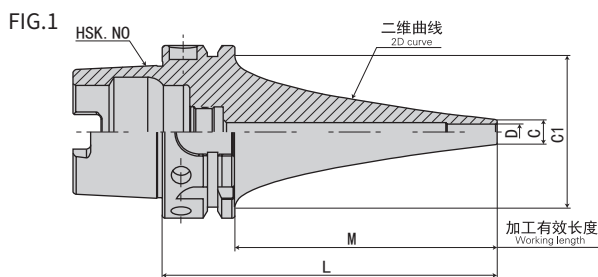
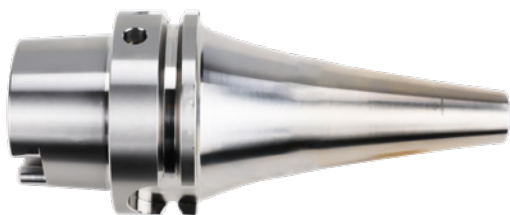
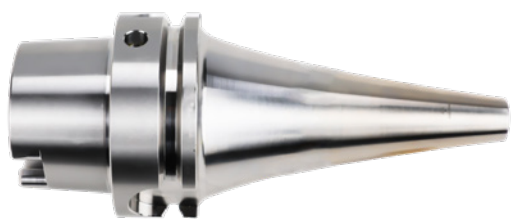


型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK63A-SLSA4- 90CV	1	4	7	1.5	90	64	53	12	65	1	1.8
-120CV	1	4	7	1.5	120	94	53	12	95	1.1	2.7
-150CV	1	4	7	1.5	150	124	53	12	125	1.3	4
-180CV	1	4	7	1.5	180	154	53	12	154	1.4	6.6
-210CV	1	4	7	1.5	210	184	53	12	185	1.4	11.6
-240CV	1	4	7	1.5	240	214	53	12	214	1.6	14
-270CV	1	4	7	1.5	270	244	53	12	245	2	11.9
-300CV	1	4	7	1.5	300	274	53	12	275	2.1	15.9
-SLRA4-120CV	2	4	10	3	120	94	53	12	95	1	1.9
-150CV	2	4	10	3	150	124	53	12	125	1.1	2.9
-180CV	2	4	10	3	180	154	53	12	155	1.4	3.3
-210CV	2	4	10	3	210	184	53	12	185	1.4	5.6
-SLSA6- 90CV	1	6	9	1.5	90	64	53	18	65	1	1.6
-120CV	1	6	9	1.5	120	94	53	18	95	1.1	2.3
-150CV	1	6	9	1.5	150	124	53	18	125	1.3	3.6
-180CV	1	6	9	1.5	180	154	53	18	154	1.4	5.7
-210CV	1	6	9	1.5	210	184	53	18	184	1.6	7.3
-240CV	1	6	9	1.5	240	214	53	18	214	1.6	12
-270CV	1	6	9	1.5	270	244	53	18	245	2.1	8.5
-300CV	1	6	9	1.5	300	274	53	18	275	2.3	11.7
-SLRA6- 90CV	2	6	13	3.5	90	64	53	18	65	1	0.8
-120CV	2	6	13	3.5	120	94	53	18	95	1.1	1.2
-150CV	2	6	13	3.5	150	124	53	18	125	1.3	1.9
-180CV	2	6	13	3.5	180	154	53	18	155	1.4	2.8
-210CV	2	6	13	3.5	210	184	53	18	185	1.4	4.8

规格说明:

HSK63A - **SLSA** - **4** - **90** - **CV**
 锥柄形式 Taper size
 功能代号 Holder type
 L 长度 Length (L)
 刀杆直径 Diameter
 曲线型 Curve

·HSK63A-SL 热缩刀柄（CV 曲线型） HSK63A-SL SHRINK FIT HOLDER(CV CURVE)

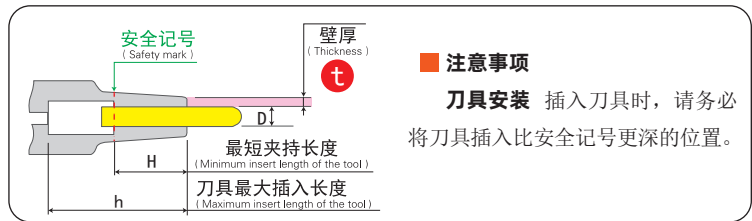
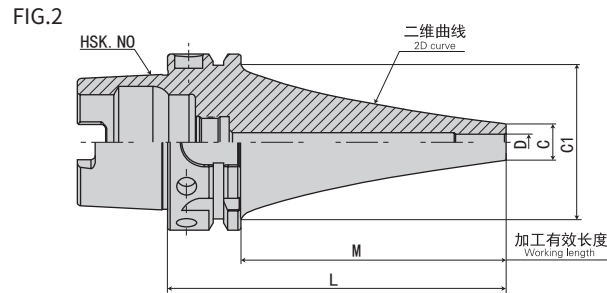
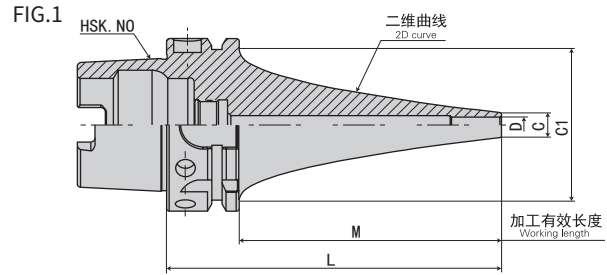
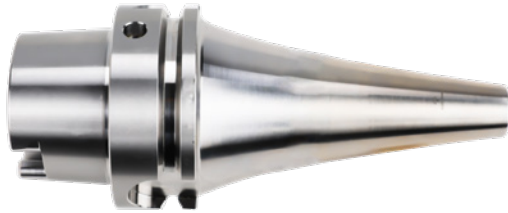
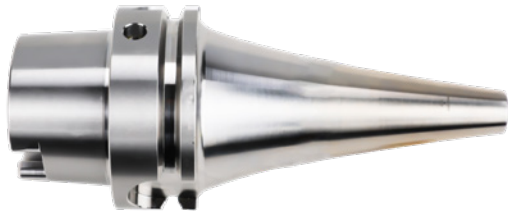


型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK63A-SLFA6- 90CV	2	6	13	3.5	90	64	53	18	65	1	0.8
-120CV	2	6	13	3.5	120	94	53	18	95	1.1	1.2
-150CV	2	6	13	3.5	150	124	53	18	125	1.3	1.9
-180CV	2	6	13	3.5	180	154	53	18	155	1.4	2.8
-210CV	2	6	13	3.5	210	184	53	18	185	1.4	4.8
-SLSA8- 90CV	1	8	11	1.5	90	64	53	24	65	1	1.4
-120CV	1	8	11	1.5	120	94	53	24	94	1.1	2
-150CV	1	8	11	1.5	150	124	53	24	124	1.3	2.7
-180CV	1	8	11	1.5	180	154	53	24	155	1.4	5
-210CV	1	8	11	1.5	210	184	53	24	184	1.6	6.6
-240CV	1	8	11	1.5	240	214	53	24	214	1.8	8.3
-270CV	1	8	11	1.5	270	244	53	24	244	2.2	6.9
-300CV	1	8	11	1.5	300	274	53	24	274	2.4	8.9
-SLRA8- 90CV	2	8	16	4	90	64	53	24	65	1	0.7
-120CV	2	8	16	4	120	94	53	24	95	1.2	1
-150CV	2	8	16	4	150	124	53	24	125	1.4	1.4
-180CV	2	8	16	4	180	154	53	24	155	1.5	2
-210CV	2	8	16	4	210	184	53	24	185	1.6	3.5
-SLFA8- 90CV	2	8	16	4	90	64	53	24	65	1	0.7
-120CV	2	8	16	4	120	94	53	24	95	1.2	1
-150CV	2	8	16	4	150	124	53	24	125	1.4	1.4
-180CV	2	8	16	4	180	154	53	24	155	1.5	2
-210CV	2	8	16	4	210	184	53	24	185	1.6	3.5

规格说明:

HSK63A - **SLFA** - **6** - **90** - **CV**
 锥柄形式 Taper size
 功能代号 Holder type
 刀杆直径 Diameter
 L 长度 Length (L)
 曲线型 Curve

·HSK63A-SL 热缩刀柄 (CV 曲线型) HSK63A-SL SHRINK FIT HOLDER(CV CURVE)

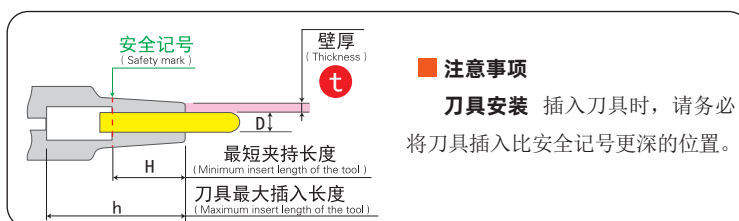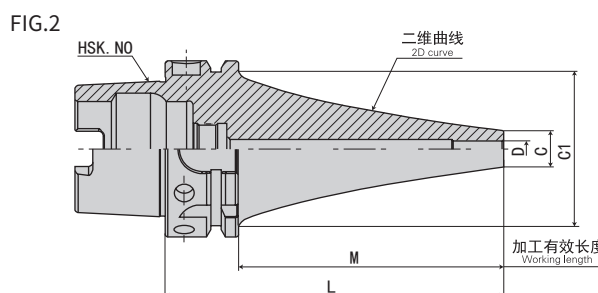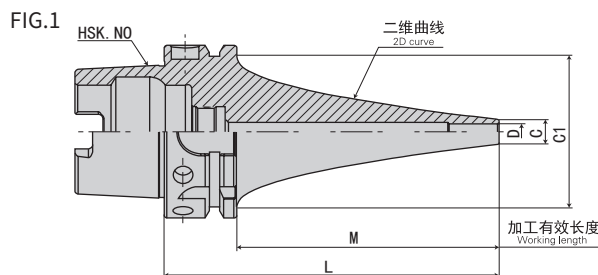
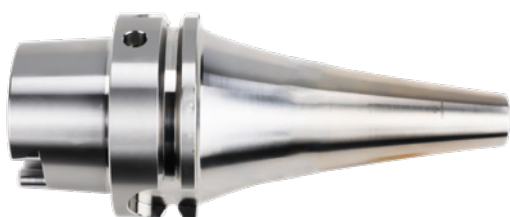
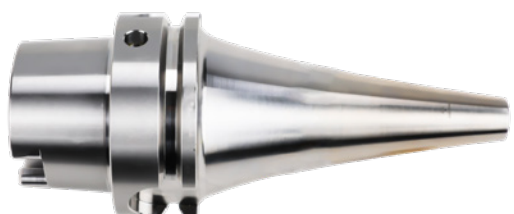


型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK63A-SLSA10- 90CV	1	10	13	1.5	90	64	53	30	65	1	1.3
-120CV	1	10	13	1.5	120	94	53	30	94	1.3	1.3
-150CV	1	10	13	1.5	150	124	53	30	125	1.4	2.2
-180CV	1	10	13	1.5	180	154	53	30	154	1.6	3.4
-210CV	1	10	13	1.5	210	184	53	30	184	1.6	6
-240CV	1	10	13	1.5	240	214	53	30	212	2.1	5.8
-270CV	1	10	13	1.5	270	244	53	30	244	2.1	6.6
-300CV	1	10	13	1.5	300	274	53	30	274	2.3	8.6
-SLRA10- 90CV	2	10	19	4.5	90	64	53	30	65	1	0.6
-120CV	2	10	19	4.5	120	94	53	30	95	1.2	0.9
-150CV	2	10	19	4.5	150	124	53	30	125	1.3	1.4
-180CV	2	10	19	4.5	180	154	53	30	155	1.5	2
-210CV	2	10	19	4.5	210	184	53	30	185	1.6	3.1
-SLFA10- 90CV	2	10	19	4.5	90	64	53	30	65	1	0.6
-120CV	2	10	19	4.5	120	94	53	30	95	1.2	0.9
-150CV	2	10	19	4.5	150	124	53	30	125	1.3	1.4
-180CV	2	10	19	4.5	180	154	53	30	155	1.5	2
-210CV	2	10	19	4.5	210	184	53	30	185	1.6	3.1
-SLSA12- 90CV	1	12	15	1.5	90	64	53	30	64	1.1	0.9
-120CV	1	12	15	1.5	120	94	53	30	94	1.3	1.2
-150CV	1	12	15	1.5	150	124	53	30	124	1.4	2.4
-180CV	1	12	15	1.5	180	154	53	30	154	1.6	3.3
-210CV	1	12	15	1.5	210	184	53	30	184	1.8	4.6
-240CV	1	12	15	1.5	240	214	53	30	214	2.1	5.5
-270CV	1	12	15	1.5	270	244	53	30	244	2.3	5.4

规格说明:

HSK63A - **SLSA** - **10** - **90** - **CV**
 锥柄形式 Taper size
 功能代号 Holder type
 L 长度 Length (L)
 曲线型 Curve

·HSK63A-SL 热缩刀柄（CV 曲线型） HSK63A-SL SHRINK FIT HOLDER(CV CURVE)

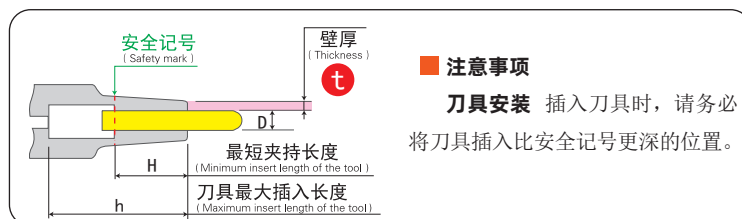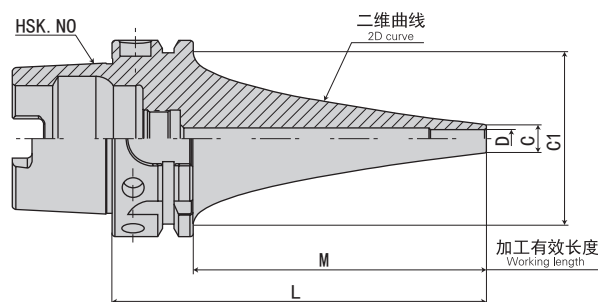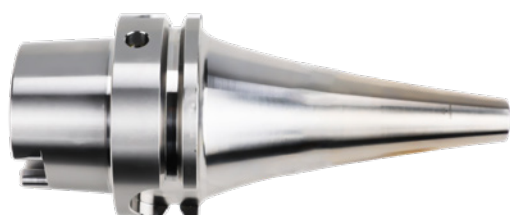

型号 Model	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK63A-SLRA12- 90CV	12	22	5	90	64	53	30	64	1	0.6
-120CV	12	22	5	120	94	53	30	94	1.3	0.7
-150CV	12	22	5	150	124	53	30	124	1.5	1.1
-180CV	12	22	5	180	154	53	30	154	1.5	1.8
-210CV	12	22	5	210	184	53	30	184	1.6	2.8
-SLFA12- 90CV	12	22	5	90	64	53	30	64	1	0.6
-120CV	12	22	5	120	94	53	30	94	1.3	0.7
-150CV	12	22	5	150	124	53	30	124	1.5	1.1
-180CV	12	22	5	180	154	53	30	154	1.5	1.8
-210CV	12	22	5	210	184	53	30	184	1.6	2.8
-SLSB16- 90CV	16	21	2.5	90	64	53	32	62	1.1	0.6
-120CV	16	21	2.5	120	94	53	32	92	1.5	0.8
-150CV	16	21	2.5	150	124	53	32	122	1.6	1.5
-180CV	16	21	2.5	180	154	53	32	152	1.9	1.9
-210CV	16	21	2.5	210	184	53	32	182	2.1	3
-240CV	16	21	2.5	240	214	53	32	212	2.4	3.7
-270CV	16	21	2.5	270	244	53	32	242	2.7	4.6
-SLSB20- 90CV	20	26	3	90	64	51	40	62	1.2	0.5
-120CV	20	26	3	120	94	53	40	92	1.5	0.8
-150CV	20	26	3	150	124	53	40	122	1.7	1.3
-180CV	20	26	3	180	154	53	40	152	2	1.8
-210CV	20	26	3	210	184	53	40	182	2.4	2.3
-240CV	20	26	3	240	214	53	40	212	2.7	3
-270CV	20	26	3	270	244	53	40	242	3.1	3.4

规格说明:

HSK63A - **SLRA** - **12** - **90** - **CV**
 锥柄形式 Taper size
 功能代号 Holder type
 L 长度 Length (L)
 曲线型 Curve

·HSK100A-SL 热缩刀柄（3°一体型）

HSK100A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



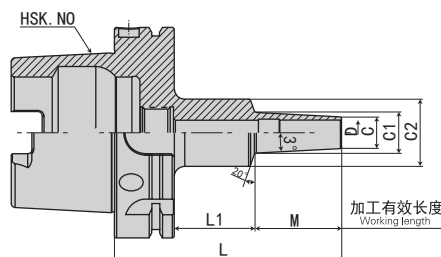


FIG.2

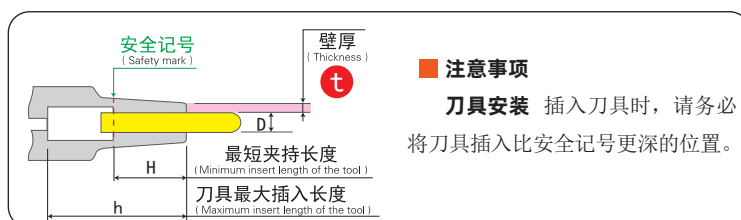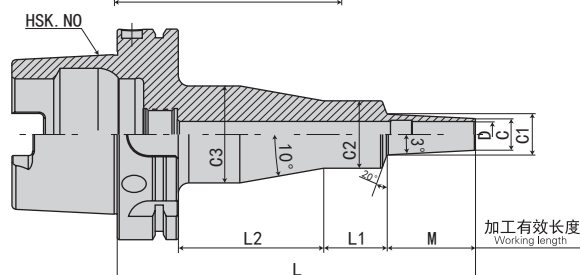

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK100A-SLSA3-110-M 42	1	3	6	1.5	110	42	39	*	10.4	26	*	9	80	2.2	9.4
-135-M 67	1	3	6	1.5	135	67	39	*	13	26	*	9	105	2.3	15.1
-140-M 42	1	3	6	1.5	140	42	69	*	10.4	26	*	9	110	2.3	10.1
-165-M 67	1	3	6	1.5	165	67	69	*	13	25	*	9	136	2.2	16
-M 97	1	3	6	1.5	165	97	39	*	16.2	26	*	9	135	2.3	21
-170-M 42	2	3	6	1.5	170	42	33	66	10.4	26	40	9	140	2.6	10
-195-M 67	2	3	6	1.5	195	67	33	66	13	26	40	9	165	2.6	15.9
-M 97	1	3	6	1.5	195	97	69	*	16.2	25	*	9	166	2.3	22.5
-225-M 97	2	3	6	1.5	225	97	33	66	16.2	26	40	9	195	2.7	22.2
-SLRA3- 90-M 22	1	3	7.5	2.25	90	22	39	*	9.8	26	*	9	60	2.2	2.9
-110-M 42	1	3	7.5	2.25	110	42	39	*	11.9	26	*	9	80	2.2	5.5
-120-M 22	1	3	7.5	2.25	120	22	69	*	9.8	25	*	9	91	2.2	3.3
-135-M 67	1	3	7.5	2.25	135	67	39	*	14.5	26	*	9	105	2.3	9
-140-M 42	1	3	7.5	2.25	140	42	69	*	11.9	26	*	9	110	2.3	6.1
-150-M 22	2	3	7.5	2.25	150	22	33	66	9.8	26	40	9	120	2.6	3.2
-165-M 67	1	3	7.5	2.25	165	67	69	*	14.5	25	*	9	136	2.6	10.1
-M 97	1	3	7.5	2.25	165	97	39	*	17.7	25	*	9	136	2.2	13.1
-170-M 42	2	3	7.5	2.25	170	42	33	66	11.9	26	40	9	140	2.6	6
-195-M 67	2	3	7.5	2.25	195	67	33	66	14.5	26	40	9	165	2.6	9.9
-M 97	1	3	7.5	2.25	195	97	69	*	17.7	26	*	9	165	2.4	14.7
-M127	1	3	7.5	2.25	195	127	39	*	20.8	36	*	9	165	2.4	15.8
-225-M 97	2	3	7.5	2.25	225	97	33	66	17.7	26	40	9	195	2.7	14.4
-M127	1	3	7.5	2.25	225	127	69	*	20.8	36	*	9	195	2.6	16.4
-255-M127	2	3	7.5	2.25	255	127	30	69	20.8	32	46	9	226	3	16.6

规格说明:

HSK100A - SLSA - 3 - 110 - M42

- 加工有效长度 Working length
- L 长度 Length (L)
- 刀杆直径 Diameter
- 功能代号 Holder type
- 锥柄形式 Taper size

·HSK100A-SL 热缩刀柄（3°一体型）

HSK100A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



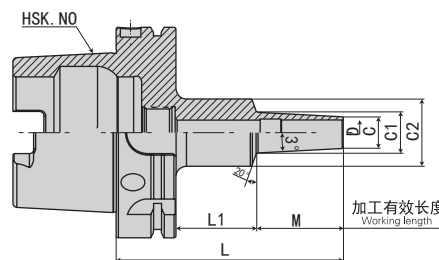


FIG.2

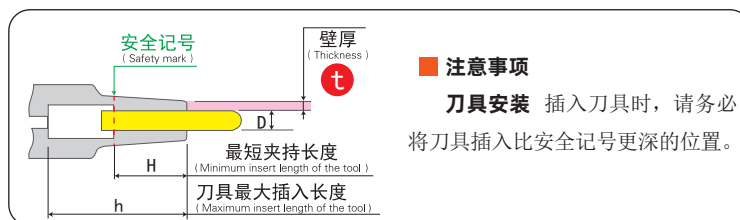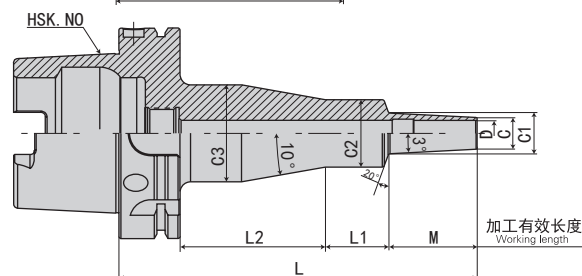

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK100A-SLFB3- 90-M 22	1	3	9.5	3.25	90	22	39	*	11.8	26	*	9	60	2.2	1.9
-110-M 42	1	3	9.5	3.25	110	42	39	*	13.9	26	*	9	80	2.3	3.3
-120-M 22	1	3	9.5	3.25	120	22	69	*	11.8	26	*	9	90	2.3	2.3
-135-M 67	1	3	9.5	3.25	135	67	39	*	16.5	26	*	9	105	2.3	5.5
-140-M 42	1	3	9.5	3.25	140	42	69	*	13.9	25	*	9	111	2.2	4.1
-150-M 22	2	3	9.5	3.25	150	22	33	66	11.8	26	40	9	120	2.6	2.3
-165-M 67	1	3	9.5	3.25	165	67	69	*	16.5	25	*	9	136	2.3	6.7
-170-M 42	2	3	9.5	3.25	170	42	33	66	13.9	26	40	9	140	2.6	3.9
-195-M 67	2	3	9.5	3.25	195	67	33	66	16.5	26	40	9	165	2.6	6.3
-SLSA4-110-M 42	1	4	7	1.5	110	42	39	*	11.4	25	*	12	81	2.1	7.2
-135-M 67	1	4	7	1.5	135	67	39	*	14	25	*	12	106	2.2	11.8
-140-M 42	1	4	7	1.5	140	42	69	*	11.4	25	*	12	111	2.2	8
-165-M 67	1	4	7	1.5	165	67	69	*	14	25	*	12	136	2.3	13.1
-M 97	1	4	7	1.5	165	97	39	*	17.2	26	*	12	135	2.3	16.9
-170-M 42	2	4	7	1.5	170	42	33	66	11.4	26	40	12	140	2.6	8
-195-M 67	2	4	7	1.5	195	67	33	66	14	25	39	12	166	2.6	12.9
-M 97	1	4	7	1.5	195	97	69	*	17.2	25	*	12	166	2.3	18.7
-225-M 97	2	4	7	1.5	225	97	33	66	17.2	25	39	12	196	2.6	18.3
-SLRA4- 90-M 22	1	4	10	3	90	22	39	*	12.3	25	*	12	61	2.1	1.8
-110-M 42	1	4	10	3	110	42	39	*	14.4	25	*	12	81	2.2	3.2
-120-M 22	1	4	10	3	120	22	69	*	12.3	25	*	12	91	2.2	2.3
-135-M 67	1	4	10	3	135	67	39	*	17	25	*	12	106	2.2	5.3
-140-M 42	1	4	10	3	140	42	69	*	14.4	25	*	12	111	2.2	4
-150-M 22	2	4	10	3	150	22	33	66	12.3	26	40	12	120	2.6	2.2
-165-M 67	1	4	10	3	165	67	69	*	17	26	*	12	135	2.4	6.3
-M 97	1	4	10	3	165	97	39	*	20.2	25	*	12	136	2.2	8

规格说明:

HSK100A - SLFB - 3 - 90 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK100A-SL 热缩刀柄（3°一体型）

HSK100A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



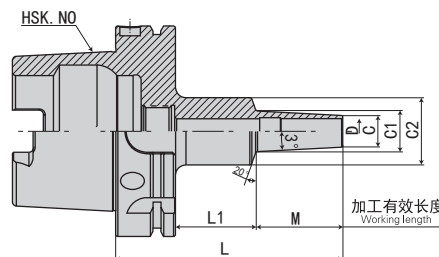


FIG.2

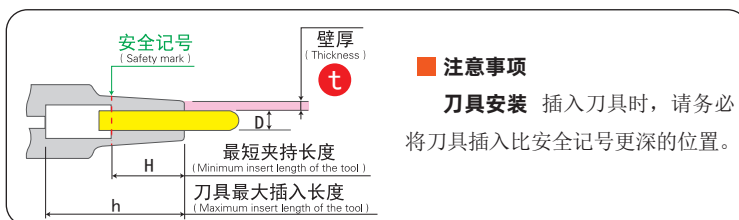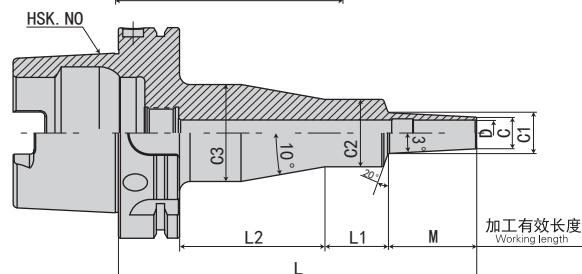

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK100A-SLRA4-170-M 42	2	4	10	3	170	42	33	66	14.4	25	39	12	141	2.6	3.8
-195-M 67	2	4	10	3	195	67	33	66	17	25	39	12	166	2.6	6.3
-M 97	1	4	10	3	195	97	69	*	20.2	26	*	12	165	2.4	9.5
-M127	1	4	10	3	195	127	39	*	23.3	32	*	12	166	2.4	9.6
-225-M 97	2	4	10	3	225	97	33	66	20.2	26	40	12	195	2.7	9.2
-M127	1	4	10	3	225	127	69	*	23.3	32	*	12	196	2.6	10.7
-255-M127	2	4	10	3	255	127	30	69	23.3	32	46	12	226	3	10.4
-SLFB4- 90-M 22	1	4	12	4	90	22	39	*	14.3	25	*	12	61	2.1	1.4
-110-M 42	1	4	12	4	110	42	39	*	16.4	26	*	12	80	2.3	2.3
-120-M 22	1	4	12	4	120	22	69	*	14.3	25	*	12	91	2.2	1.9
-135-M 67	1	4	12	4	135	67	39	*	19	26	*	12	105	2.3	3.7
-140-M 42	1	4	12	4	140	42	69	*	16.4	25	*	12	111	2.3	3.1
-150-M 22	2	4	12	4	150	22	33	66	14.3	25	39	12	121	2.6	1.8
-165-M 67	1	4	12	4	165	67	69	*	19	26	*	12	135	2.4	4.7
-170-M 42	2	4	12	4	170	42	33	66	16.4	25	39	12	141	2.6	2.9
-195-M 67	2	4	12	4	195	67	33	66	19	25	39	12	166	2.6	4.7
-SLSA6-110-M 42	1	6	9	1.5	110	42	39	*	13.4	25	*	18	81	2.1	4.9
-135-M 67	1	6	9	1.5	135	67	39	*	16	25	*	18	106	2.2	8.2
-140-M 42	1	6	9	1.5	140	42	69	*	13.4	25	*	18	111	2.2	5.8
-165-M 67	1	6	9	1.5	165	67	69	*	16	25	*	18	136	2.3	9.5
-M 97	1	6	9	1.5	165	97	39	*	19.2	32	*	18	136	2.3	11.1
-170-M 42	2	6	9	1.5	170	42	33	66	13.4	25	39	18	141	2.6	5.6
-195-M 67	2	6	9	1.5	195	67	33	66	16	25	39	18	166	2.6	9.3
-M 97	1	6	9	1.5	195	97	69	*	19.2	32	*	18	166	2.4	11.9
-225-M 97	2	6	9	1.5	225	97	30	69	19.2	32	46	18	196	2.9	11.7

规格说明:

HSK100A - SLRA - 4 - 170 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK100A-SL 热缩刀柄 (3°一体型)

HSK100A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



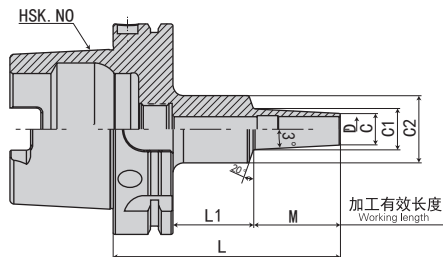


FIG.2

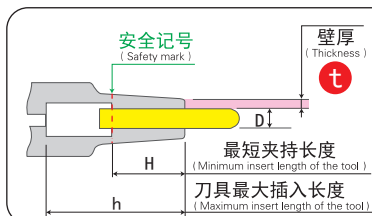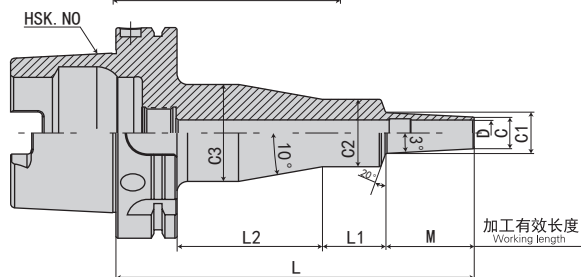

■ 注意事项

刀具安装 插入刀具时, 请务必将刀具插入比安全记号更深的位置。

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK100A-SLSB6-110-M 42	1	6	10	2	110	42	39	*	14.4	25	*	18	81	2.1	3.8
-135-M 67	1	6	10	2	135	67	39	*	17	25	*	18	106	2.2	6.3
-140-M 42	1	6	10	2	140	42	69	*	14.4	25	*	18	111	2.2	4.7
-165-M 67	1	6	10	2	165	67	69	*	17	25	*	18	136	2.3	7.7
-M 97	1	6	10	2	165	97	39	*	20.2	32	*	18	136	2.3	8.6
-170-M 42	2	6	10	2	170	42	33	66	14.4	26	40	18	140	2.6	4.6
-195-M 67	2	6	10	2	195	67	33	66	17	25	39	18	166	2.6	7.4
-M 97	1	6	10	2	195	97	69	*	20.2	36	*	18	165	2.6	9.5
-M127	1	6	10	2	195	127	39	*	23.3	32	*	18	166	2.4	11.3
-225-M 97	2	6	10	2	225	97	30	69	20.2	32	46	18	196	2.9	9.2
-M127	1	6	10	2	225	127	69	*	23.3	32	*	18	196	2.5	12.4
-M157	1	6	10	2	225	157	39	*	26.5	32	*	18	196	2.5	13.6
-255-M127	2	6	10	2	255	127	30	69	23.3	32	46	18	226	3	12.1
-M157	1	6	10	2	255	157	69	*	26.5	32	*	18	226	2.6	15.1
-285-M157	2	6	10	2	285	157	30	69	26.5	32	46	18	256	3.1	14.6
-SLRB6- 90-M 22	1	6	14	4	90	22	39	*	16.3	32	*	18	61	2.2	1
-110-M 42	1	6	14	4	110	42	39	*	18.4	32	*	18	81	2.3	1.6
-120-M 22	1	6	14	4	120	22	69	*	16.3	32	*	18	91	2.4	1.2
-135-M 67	1	6	14	4	135	67	39	*	21	32	*	18	106	2.3	2.7
-140-M 42	1	6	14	4	140	42	69	*	18.4	32	*	18	111	2.4	2
-150-M 22	2	6	14	4	150	22	30	69	16.3	32	46	18	121	2.8	1.2
-165-M 67	1	6	14	4	165	67	69	*	21	32	*	18	136	2.5	3.2
-170-M 42	2	6	14	4	170	42	30	69	18.4	32	46	18	141	2.9	1.9
-195-M 67	2	6	14	4	195	67	30	69	21	32	46	18	166	2.9	3.1

规格说明:

HSK100A - SLSB - 6 - 110 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- L 长度 Length (L)
- 刀杆直径 Diameter
- 加工有效长度 Working length

·HSK100A-SL 热缩刀柄（3°一体型）

HSK100A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



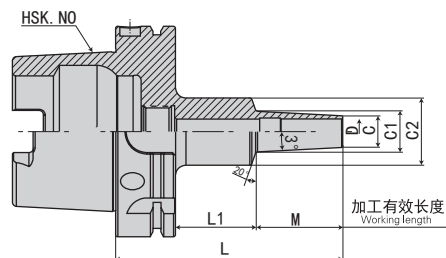


FIG.2

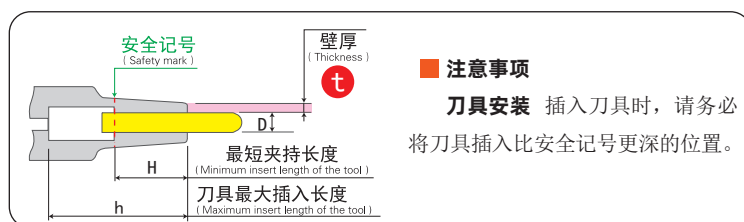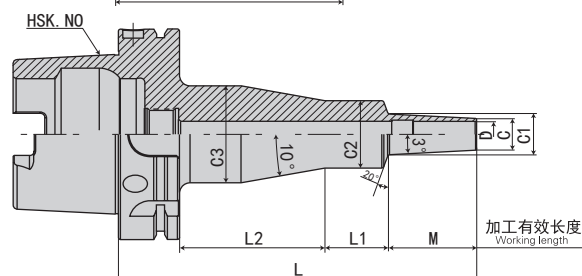

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK100A-SLFB6- 90-M 22	1	6	14	4	90	22	39	*	16.3	32	*	18	61	2.2	1
-110-M 42	1	6	14	4	110	42	39	*	18.4	32	*	18	81	2.3	1.6
-120-M 22	1	6	14	4	120	22	69	*	16.3	32	*	18	91	2.4	1.2
-135-M 67	1	6	14	4	135	67	39	*	21	36	*	18	105	2.4	2.6
-140-M 42	1	6	14	4	140	42	69	*	18.4	32	*	18	111	2.4	2
-150-M 22	2	6	14	4	150	22	30	69	16.3	32	46	18	121	2.8	1.2
-165-M 67	1	6	14	4	165	67	69	*	21	32	*	18	136	2.5	3.2
-170-M 42	2	6	14	4	170	42	30	69	18.4	32	46	18	141	2.9	1.9
-195-M 67	2	6	14	4	195	67	30	69	21	32	46	18	166	2.9	3.1
-SLSA8-110-M 42	1	8	11	1.5	110	42	39	*	15.4	36	*	24	80	2.3	3.2
-135-M 67	1	8	11	1.5	135	67	39	*	18	32	*	24	106	2.3	5.5
-140-M 42	1	8	11	1.5	140	42	69	*	15.4	36	*	24	110	2.5	3.5
-165-M 67	1	8	11	1.5	165	67	69	*	18	36	*	24	135	2.5	5.8
-M 97	1	8	11	1.5	165	97	39	*	21.2	32	*	24	136	2.3	8.1
-170-M 42	2	8	11	1.5	170	42	28	71	15.4	36	50	24	140	3.1	3.4
-195-M 67	2	8	11	1.5	195	67	30	69	18	32	46	24	166	2.9	5.9
-M 97	1	8	11	1.5	195	97	69	*	21.2	32	*	24	166	2.5	8.9
-225-M 97	2	8	11	1.5	225	97	28	71	21.2	36	50	24	195	3.2	8.3
-SLSB8-110-M 42	1	8	13	2.5	110	42	39	*	17.4	32	*	24	81	2.2	2.1
-135-M 67	1	8	13	2.5	135	67	39	*	20	32	*	24	106	2.3	3.6
-140-M 42	1	8	13	2.5	140	42	69	*	17.4	32	*	24	111	2.4	2.6
-165-M 67	1	8	13	2.5	165	67	69	*	20	32	*	24	136	2.4	4.2
-M 97	1	8	13	2.5	165	97	39	*	23.2	32	*	24	136	2.4	5.4

规格说明:

HSK100A - SLFB - 6 - 90 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK100A-SL 热缩刀柄（3°一体型）

HSK100A-SL SHRINK FIT HOLDER(3° MONO)

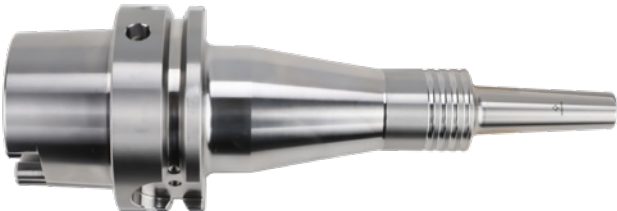


FIG.1



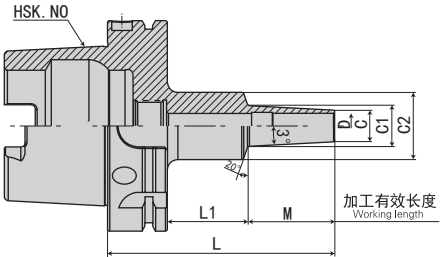


FIG.2

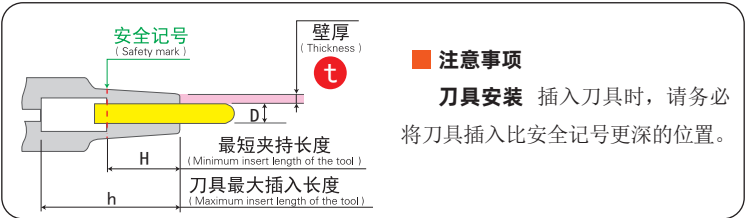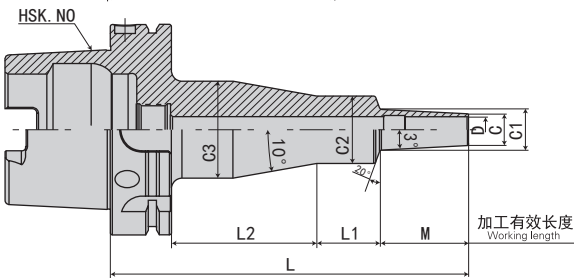

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK100A-SLSB8-170-M 42	2	8	13	2.5	170	42	28	71	17.4	36	50	24	140	3.1	2.4
-195-M 67	2	8	13	2.5	195	67	30	69	20	32	46	24	166	2.9	4
-M 97	1	8	13	2.5	195	97	69	*	23.2	32	*	24	166	2.5	6.3
-M127	1	8	13	2.5	195	127	39	*	26.3	32	*	24	166	2.4	7.3
-225-M 97	2	8	13	2.5	225	97	30	69	23.2	32	46	24	196	3	6
-M127	1	8	13	2.5	225	127	69	*	26.3	32	*	24	196	2.6	8.5
-M157	1	8	13	2.5	225	157	39	*	29.5	42	*	24	196	2.7	8.1
-255-M127	2	8	13	2.5	255	127	30	69	26.3	32	46	24	226	3.1	8.2
-M157	1	8	13	2.5	255	157	69	*	29.5	42	*	24	226	2.9	8.7
-285-M157	2	8	13	2.5	285	157	28	71	29.5	42	56	24	256	3.6	8.6
-SLRB8- 90-M 22	1	8	18	5	90	22	39	*	20.3	32	*	24	61	2.2	0.7
-110-M 42	1	8	18	5	110	42	39	*	22.4	32	*	24	81	2.3	1.1
-120-M 22	1	8	18	5	120	22	69	*	20.3	32	*	24	91	2.4	1
-135-M 67	1	8	18	5	135	67	39	*	25	32	*	24	106	2.4	1.8
-140-M 42	1	8	18	5	140	42	69	*	22.4	32	*	24	111	2.4	1.6
-150-M 22	2	8	18	5	150	22	30	69	20.3	32	46	24	121	2.9	1
-165-M 67	1	8	18	5	165	67	69	*	25	32	*	24	136	2.5	2.4
-170-M 42	2	8	18	5	170	42	28	71	22.4	36	50	24	140	3.1	1.3
-195-M 67	2	8	18	5	195	67	30	69	25	32	46	24	166	3	2.2
-SLFB8- 90-M 22	1	8	18	5	90	22	39	*	20.3	36	*	24	60	2.3	0.7
-110-M 42	1	8	18	5	110	42	39	*	22.4	32	*	24	81	2.3	1.1
-120-M 22	1	8	18	5	120	22	69	*	20.3	32	*	24	91	2.4	1
-135-M 67	1	8	18	5	135	67	39	*	25	36	*	24	105	2.4	1.7
-140-M 42	1	8	18	5	140	42	69	*	22.4	36	*	24	110	2.6	1.3
-150-M 22	2	8	18	5	150	22	30	69	20.3	32	46	24	121	2.9	1
-165-M 67	1	8	18	5	165	67	69	*	25	32	*	24	136	2.5	2.4
-170-M 42	2	8	18	5	170	42	30	69	22.4	32	46	24	141	2.9	1.5
-195-M 67	2	8	18	5	195	67	30	69	25	32	46	24	166	3	2.2

规格说明:

HSK100A - SLSB - 8 - 170 - M42

锥柄形式 Taper size

功能代号 Holder type

L 长度 Length (L)

刀杆直径 Diameter

加工有效长度 Working length

·HSK100A-SL 热缩刀柄（3°一体型）

HSK100A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1




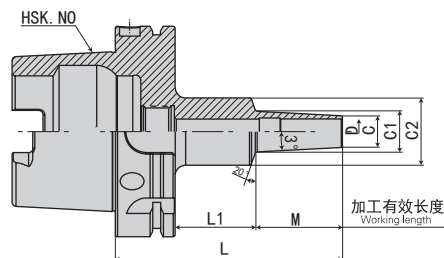


FIG.2

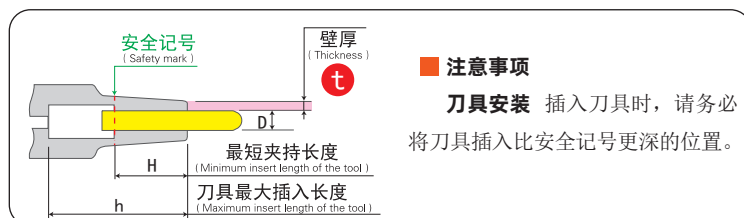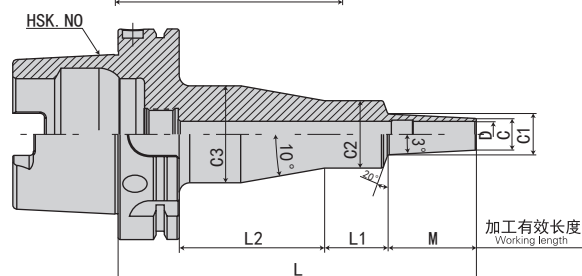

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK100A-SLSA10-110-M 42	1	10	13	1.5	110	42	39	*	17.4	25	*	30	81	2.2	2.7
-135-M 67	1	10	13	1.5	135	67	39	*	20	32	*	30	106	2.3	4.1
-140-M 42	1	10	13	1.5	140	42	69	*	17.4	25	*	30	111	2.2	3.8
-165-M 67	1	10	13	1.5	165	67	69	*	20	36	*	30	135	2.5	4.4
-M 97	1	10	13	1.5	165	97	39	*	23.2	32	*	30	136	2.3	6.2
-170-M 42	2	10	13	1.5	170	42	28	71	17.4	36	50	30	140	3.1	2.5
-195-M 67	2	10	13	1.5	195	67	30	69	20	32	46	30	166	2.9	4.6
-M 97	1	10	13	1.5	195	97	69	*	23.2	32	*	30	166	2.5	7.1
-225-M 97	2	10	13	1.5	225	97	30	69	23.2	32	46	30	196	3	6.9
-SLSB10-110-M 42	1	10	16	3	110	42	39	*	20.4	32	*	30	81	2.3	1.2
-135-M 67	1	10	16	3	135	67	39	*	23	32	*	30	106	2.3	2.5
-140-M 42	1	10	16	3	140	42	69	*	20.4	32	*	30	111	2.4	2
-165-M 67	1	10	16	3	165	67	69	*	23	32	*	30	136	2.5	3.2
-M 97	1	10	16	3	165	97	39	*	26.2	32	*	30	136	2.4	3.8
-170-M 42	2	10	16	3	170	42	30	69	20.4	32	46	30	141	2.9	1.9
-195-M 67	2	10	16	3	195	67	30	69	23	32	46	30	166	2.9	3
-M 97	1	10	16	3	195	97	69	*	26.2	32	*	30	166	2.6	4.8
-M127	1	10	16	3	195	127	39	*	29.3	42	*	30	166	2.6	4.6
-225-M 97	2	10	16	3	225	97	30	69	26.2	32	46	30	196	3	4.5
-M127	1	10	16	3	225	127	69	*	29.3	42	*	30	196	2.9	5
-M157	1	10	16	3	225	157	39	*	32.5	42	*	30	196	2.8	5.7
-255-M127	1	10	16	3	255	127	99	*	29.3	50	*	30	225	3.5	5
-M157	1	10	16	3	255	157	69	*	32.5	42	*	30	226	3	6.2
-285-M157	2	10	16	3	285	157	28	71	32.5	42	56	30	256	3.7	6.1

规格说明:

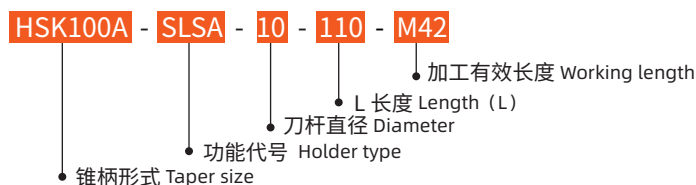

·HSK100A-SL 热缩刀柄（3°一体型）

HSK100A-SL SHRINK FIT HOLDER(3° MONO)

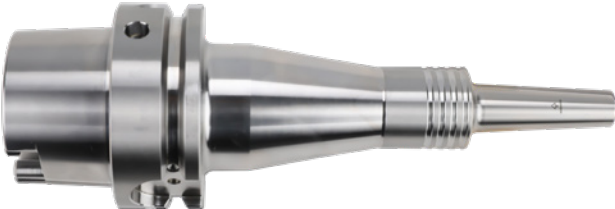


FIG.1




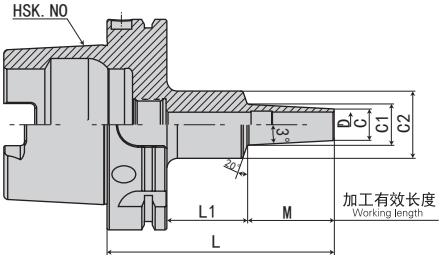


FIG.2

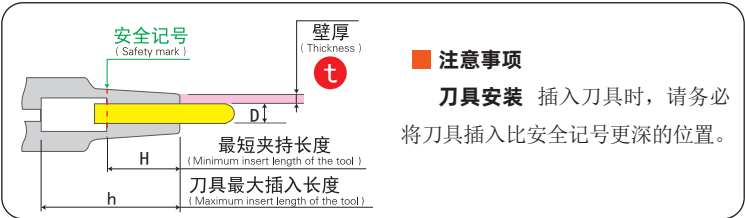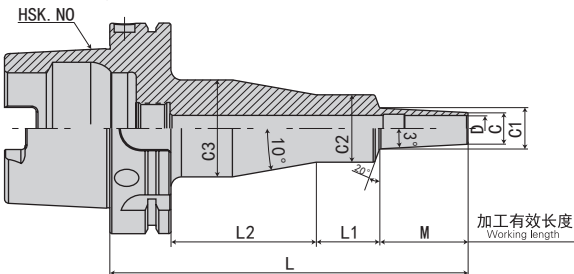

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK100A-SLRB10- 90-M 22	1	10	22	6	90	22	39	*	24.3	32	*	30	61	2.3	0.6
-110-M 42	1	10	22	6	110	42	39	*	26.4	32	*	30	81	2.3	0.9
-120-M 22	1	10	22	6	120	22	69	*	24.3	32	*	30	91	2.4	0.9
-135-M 67	1	10	22	6	135	67	39	*	29	42	*	30	106	2.5	1.1
-140-M 42	1	10	22	6	140	42	69	*	26.4	32	*	30	111	2.5	1.4
-150-M 22	2	10	22	6	150	22	28	71	24.3	36	50	30	120	3.1	0.7
-165-M 67	1	10	22	6	165	67	69	*	29	42	*	30	136	2.8	1.3
-170-M 42	2	10	22	6	170	42	28	71	26.4	36	50	30	140	3.2	1
-195-M 67	2	10	22	6	195	67	28	71	29	42	50	30	166	3.5	1.3
-SLFB10- 90-M 22	1	10	22	6	90	22	39	*	24.3	32	*	30	61	2.3	0.6
-110-M 42	1	10	22	6	110	42	39	*	26.4	32	*	30	81	2.3	0.9
-120-M 22	1	10	22	6	120	22	69	*	24.3	32	*	30	91	2.4	0.9
-135-M 67	1	10	22	6	135	67	39	*	29	36	*	30	105	2.5	1.2
-140-M 42	1	10	22	6	140	42	69	*	26.4	36	*	30	110	2.6	1.1
-150-M 22	2	10	22	6	150	22	30	69	24.3	32	46	30	121	2.9	0.9
-165-M 67	1	10	22	6	165	67	69	*	29	36	*	30	135	2.7	1.6
-170-M 42	2	10	22	6	170	42	30	69	26.4	32	46	30	141	2.9	1.3
-195-M 67	2	10	22	6	195	67	28	71	29	42	56	30	166	3.5	1.3
-SLSA12-110-M 42	1	12	15	1.5	110	42	39	*	19.4	32	*	30	79	2.2	1.9
-135-M 67	1	12	15	1.5	135	67	39	*	22	32	*	30	104	2.3	3.4
-140-M 42	1	12	15	1.5	140	42	69	*	19.4	32	*	30	109	2.4	2.4
-165-M 67	1	12	15	1.5	165	67	69	*	22	32	*	30	134	2.4	4.1
-M 97	1	12	15	1.5	165	97	39	*	25.2	32	*	30	134	2.3	5.1
-170-M 42	2	12	15	1.5	170	42	28	71	19.4	36	50	30	135	3.1	2.1
-195-M 67	2	12	15	1.5	195	67	30	69	22	32	46	30	164	2.9	3.9
-M 97	1	12	15	1.5	195	97	69	*	25.2	36	*	30	160	2.7	5.5
-225-M 97	2	12	15	1.5	225	97	30	69	25.2	32	46	30	194	3	5.8

规格说明:

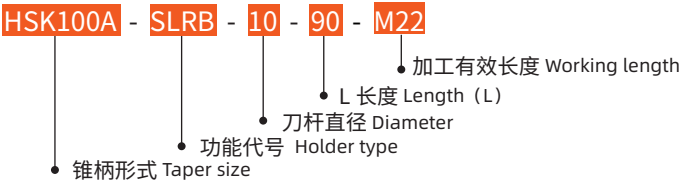

·HSK100A-SL 热缩刀柄（3°一体型）

HSK100A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



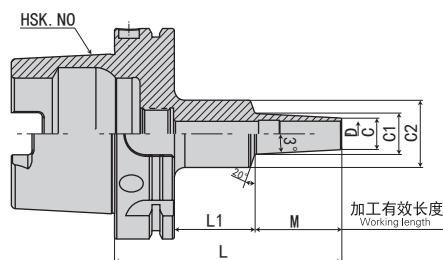


FIG.2

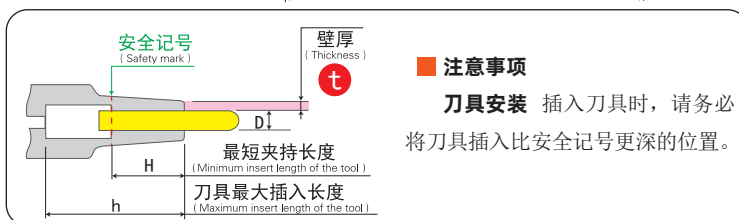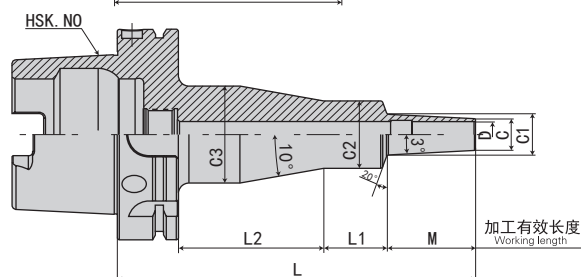

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK100A-SLSB12-110-M 42	1	12	19	3.5	110	42	39	*	23.4	32	*	30	79	2.3	1.2
-135-M 67	1	12	19	3.5	135	67	39	*	26	32	*	30	104	2.3	2
-140-M 42	1	12	19	3.5	140	42	69	*	23.4	32	*	30	109	2.4	1.7
-165-M 67	1	12	19	3.5	165	67	69	*	26	32	*	30	134	2.5	2.7
-M 97	1	12	19	3.5	165	97	39	*	29.2	42	*	30	133	2.6	2.5
-170-M 42	2	12	19	3.5	170	42	28	71	23.4	36	50	30	135	3.1	1.4
-195-M 67	2	12	19	3.5	195	67	30	69	26	32	46	30	164	3	2.5
-M 97	1	12	19	3.5	195	97	69	*	29.2	50	*	30	160	3.1	2.6
-M127	1	12	19	3.5	195	127	39	*	32.3	42	*	30	163	2.7	3.3
-225-M 97	1	12	19	3.5	225	97	99	*	29.2	50	*	30	190	3.4	2.8
-M127	1	12	19	3.5	225	127	69	*	32.3	42	*	30	192	3	3.8
-M157	1	12	19	3.5	225	157	39	*	35.5	42	*	30	193	2.9	4.2
-255-M127	2	12	19	3.5	255	127	28	71	32.3	42	56	30	222	3.6	3.7
-M157	1	12	19	3.5	255	157	69	*	35.5	42	*	30	222	3.1	4.8
-285-M157	2	12	19	3.5	285	157	28	71	35.5	42	56	30	252	3.8	4.7
-SLRB12- 90-M 22	1	12	26	7	90	22	39	*	28.3	42	*	30	58	2.4	0.4
-110-M 42	1	12	26	7	110	42	39	*	30.4	42	*	30	78	2.5	0.6
-120-M 22	1	12	26	7	120	22	69	*	28.3	42	*	30	87	2.6	0.5
-135-M 67	1	12	26	7	135	67	39	*	33	42	*	30	103	2.6	0.9
-140-M 42	1	12	26	7	140	42	69	*	30.4	42	*	30	107	2.7	0.8
-150-M 22	1	12	26	7	150	22	99	*	28.3	50	*	30	117	3.3	0.5
-165-M 67	1	12	26	7	165	67	69	*	33	42	*	30	132	2.9	1.1
-170-M 42	1	12	26	7	170	42	99	*	30.4	50	*	30	135	3.3	0.8
-195-M 67	2	12	26	7	195	67	28	71	33	42	56	30	162	3.5	1.1

规格说明:

HSK100A - SLSB - 12 - 110 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK100A-SL 热缩刀柄（3°一体型）

HSK100A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1




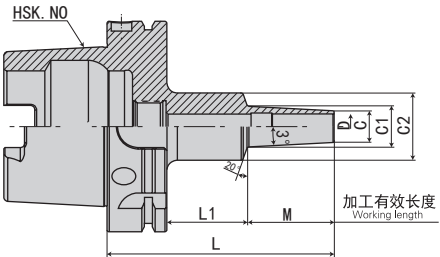


FIG.2

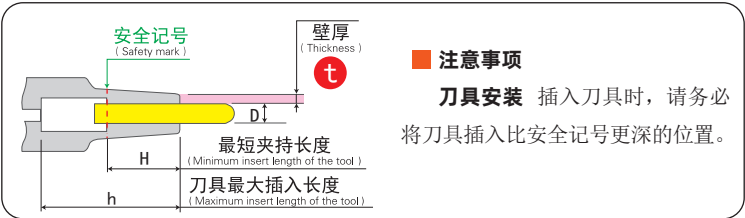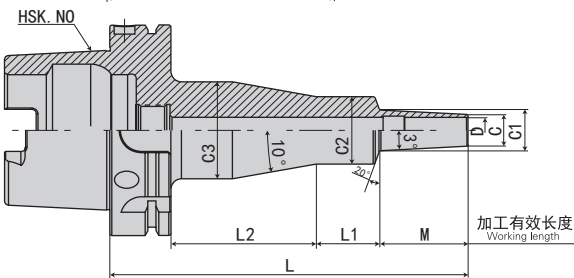

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK100A-SLFB12- 90-M 22	1	12	26	7	90	22	39	*	28.3	42	*	30	58	2.4	0.4
-110-M 42	1	12	26	7	110	42	39	*	30.4	42	*	30	78	2.5	0.6
-120-M 22	1	12	26	7	120	22	69	*	38.3	42	*	30	87	2.6	0.5
-135-M 67	1	12	26	7	135	67	39	*	33	42	*	30	103	2.6	0.9
-140-M 42	1	12	26	7	140	42	69	*	30.4	50	*	30	105	3	0.6
-150-M 22	2	12	26	7	150	22	28	71	28.3	42	56	30	117	3.3	0.5
-165-M 67	1	12	26	7	165	67	69	*	33	42	*	30	132	2.9	1.1
-170-M 42	1	12	26	7	170	42	99	*	30.4	50	*	30	135	3.3	0.8
-195-M 67	2	12	26	7	195	67	28	71	33	42	56	30	162	3.5	1.1
-SLSB16-110-M 42	1	16	24	4	110	42	39	*	28.4	42	*	32	78	2.4	0.7
-135-M 67	1	16	24	4	135	67	39	*	31	42	*	32	103	2.5	1.2
-140-M 42	1	16	24	4	140	42	69	*	28.4	42	*	32	107	2.7	0.9
-165-M 67	1	16	24	4	165	67	69	*	31	42	*	32	132	2.8	1.4
-M 97	1	16	24	4	165	97	39	*	34.2	42	*	32	133	2.7	1.7
-170-M 42	1	16	24	4	170	42	99	*	28.4	50	*	32	135	3.2	0.9
-195-M 67	1	16	24	4	195	67	99	*	31	50	*	32	160	3.3	1.4
-M 97	1	16	24	4	195	97	69	*	34.2	42	*	32	162	2.9	2.1
-M127	1	16	24	4	195	127	39	*	37.3	50	*	32	160	3	2.2
-225-M 97	1	16	24	4	225	97	99	*	34.2	50	*	32	190	3.5	2.1
-M127	1	16	24	4	225	127	69	*	37.3	53	*	32	190	3.4	2.3
-M157	1	16	24	4	225	157	39	*	40.5	53	*	32	193	3.3	2.6
-255-M127	2	16	24	4	255	127	28	71	37.3	53	67	32	220	4.3	2.3
-M157	1	16	24	4	255	157	69	*	40.5	53	*	32	220	3.7	2.9
-285-M157	2	16	24	4	285	157	28	71	40.5	53	67	32	250	4.6	2.9

规格说明:

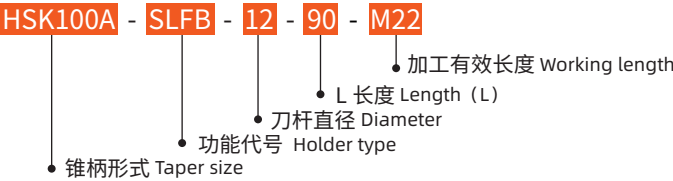

·HSK100A-SL 热缩刀柄（3°一体型）

HSK100A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



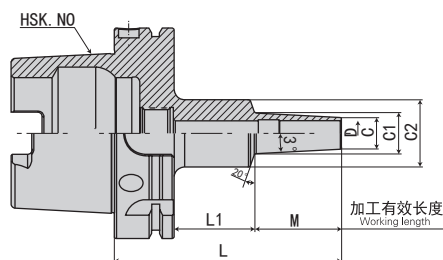


FIG.2

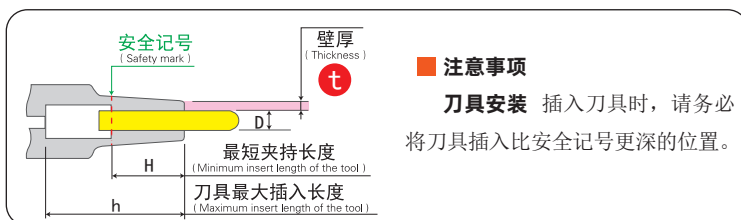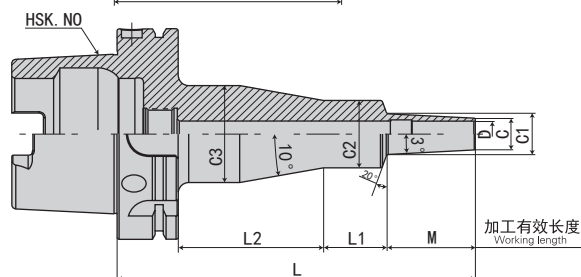

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK100A-SLRB16- 90-M 22	1	16	32	8	90	22	39	*	34.3	42	*	32	58	2.4	0.4
-110-M 42	1	16	32	8	110	42	39	*	36.4	42	*	32	78	2.5	0.5
-120-M 22	1	16	32	8	120	22	69	*	34.3	42	*	32	87	2.7	0.5
-135-M 67	1	16	32	8	135	67	39	*	39	42	*	32	103	2.7	0.7
-140-M 42	1	16	32	8	140	42	69	*	36.4	42	*	32	107	2.8	0.7
-150-M 22	2	16	32	8	150	22	28	71	34.3	42	56	32	117	3.4	0.5
-165-M 67	1	16	32	8	165	67	69	*	39	42	*	32	132	3	1
-170-M 42	2	16	32	8	170	42	28	71	36.4	42	56	32	137	3.5	0.7
-195-M 67	2	16	32	8	195	67	28	71	39	42	56	32	162	3.6	0.9
-SLFB16- 90-M 22	1	16	32	8	90	22	39	*	34.3	42	*	32	58	2.4	0.4
-110-M 42	1	16	32	8	110	42	39	*	36.4	42	*	32	78	2.5	0.5
-120-M 22	1	16	32	8	120	22	69	*	34.3	42	*	32	87	2.7	0.5
-135-M 67	1	16	32	8	135	67	39	*	39	42	*	32	103	2.7	0.7
-140-M 42	1	16	32	8	140	42	69	*	36.4	42	*	32	107	2.8	0.7
-150-M 22	2	16	32	8	150	22	28	71	34.3	42	56	32	117	3.4	0.5
-165-M 67	1	16	32	8	165	67	69	*	39	42	*	32	132	3	1
-170-M 42	2	16	32	8	170	42	28	71	36.4	42	56	32	137	3.5	0.7
-195-M 67	2	16	32	8	195	67	28	71	39	42	56	32	162	3.6	0.9
-SLSB20-110-M 42	1	20	29	4.5	110	42	39	*	33.4	42	*	40	78	2.5	0.6
-135-M 67	1	20	29	4.5	135	67	39	*	36	42	*	40	103	2.6	0.9
-140-M 42	1	20	29	4.5	140	42	69	*	33.4	42	*	40	107	2.7	0.8
-165-M 67	1	20	29	4.5	165	67	69	*	36	42	*	40	132	2.8	1.2
-M 97	1	20	29	4.5	165	97	39	*	39.2	53	*	40	133	2.9	1.1
-170-M 42	2	20	29	4.5	170	42	28	71	33.4	42	56	40	137	3.4	0.8

规格说明:

HSK100A - SLRB - 16 - 90 - M42

- 加工有效长度 Working length
- L 长度 Length (L)
- 刀杆直径 Diameter
- 功能代号 Holder type
- 锥柄形式 Taper size

·HSK100A-SL 热缩刀柄 (3°一体型)

HSK100A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



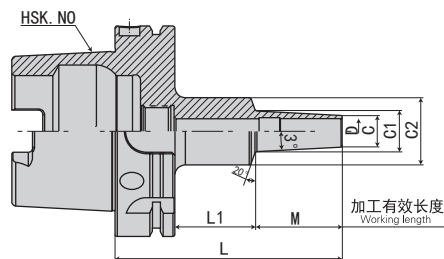


FIG.2

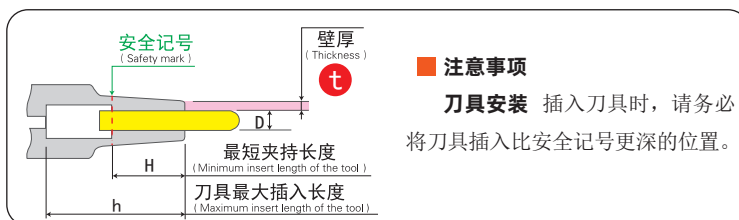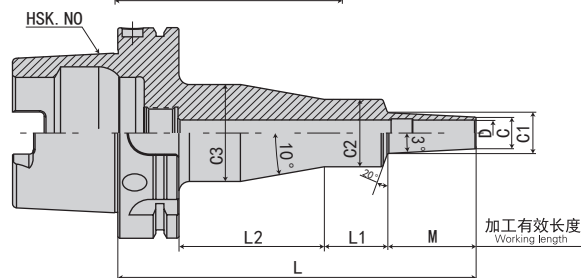

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK100A-SLSB20-195-M 67	2	20	29	4.5	195	67	28	71	36	42	56	40	162	3.5	1.2
-M 97	1	20	29	4.5	195	97	69	*	39.2	53	*	40	162	3.3	1.3
-M127	1	20	29	4.5	195	127	39	*	42.3	53	*	40	163	3.2	1.5
-225-M 97	2	20	29	4.5	225	97	28	71	39.2	53	67	40	190	4.3	1.3
-M127	1	20	29	4.5	225	127	69	*	42.3	50	*	40	190	3.5	1.9
-M157	1	20	29	4.5	225	157	39	*	45.5	53	*	40	193	3.5	1.9
-255-M127	2	20	29	4.5	255	127	28	71	42.3	53	67	40	220	4.5	1.8
-M157	1	20	29	4.5	255	157	69	*	45.5	53	*	40	220	3.9	2.2
-285-M157	2	20	29	4.5	285	157	28	71	45.5	53	67	40	250	4.8	2.2
-SLRB20-110-M 42	1	20	38	9	110	42	39	*	42.4	53	*	40	78	2.8	0.3
-135-M 67	1	20	38	9	135	67	39	*	45	53	*	40	103	3.1	0.5
-140-M 42	1	20	38	9	140	42	69	*	42.4	53	*	40	105	3.2	0.4
-165-M 67	1	20	38	9	165	67	69	*	45	53	*	40	130	3.5	0.6
-170-M 42	2	20	38	9	170	42	28	*	42.4	53	*	40	135	4.1	0.4
-195-M 67	2	20	38	9	195	67	28	71	45	53	67	40	160	4.4	0.6
-SLFB20-110-M 42	1	20	38	9	110	42	39	*	42.4	53	*	40	78	2.8	0.3
-135-M 67	1	20	38	9	135	67	39	*	45	53	*	40	103	3.1	0.5
-140-M 42	1	20	38	9	140	42	69	*	42.4	53	*	40	105	3.2	0.4
-165-M 67	1	20	38	9	165	67	69	*	45	53	*	40	130	3.5	0.6
-170-M 42	2	20	38	9	170	42	28	*	42.4	53	*	40	135	4.1	0.4
-195-M 67	2	20	38	9	195	67	28	71	45	53	67	40	160	4.4	0.6

规格说明:

HSK100A - SLSB - 20 - 195 - M67

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK100A-SL 热缩刀柄（3°一体型）

HSK100A-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



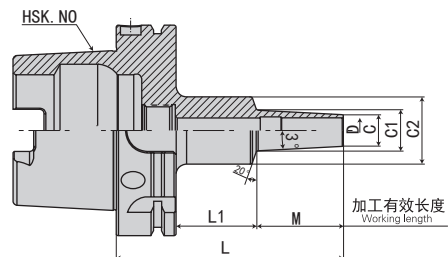


FIG.2

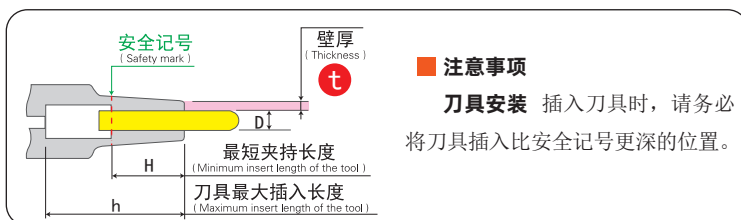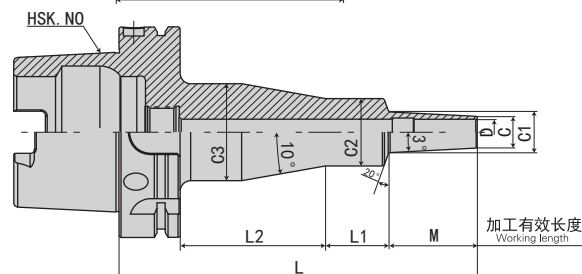

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
HSK100A-SLRB25-110-M 42	1	25	45	10	110	42	39	*	49.4	53	*	45	78	2.9	0.3
-140-M 42	1	25	45	10	140	42	69	*	49.4	53	*	45	105	3.3	0.4
-170-M 42	2	25	45	10	170	42	28	71	49.4	53	67	45	135	4.2	0.4
-SLFB25-110-M 42	1	25	45	10	110	42	39	*	49.4	53	*	45	78	2.9	0.3
 -140-M 42	1	25	45	10	140	42	69	*	49.4	50	*	45	105	3.3	0.5
-170-M 42	2	25	45	10	170	42	28	71	49.4	53	67	45	135	4.2	0.4
-SLRB32-110-M 42	1	32	54	11	110	42	39	*	58.4	63	*	50	77	3.2	0.2
-140-M 42	1	32	54	11	140	42	69	*	58.4	63	*	50	107	3.7	0.3
-170-M 42	2	32	54	11	170	42	28	71	58.4	63	77	50	132	4.9	0.3

规格说明:

HSK100A - SLRB - 25 - 110 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK100A-SL 热缩刀柄 (CV 曲线型) HSK100A-SL SHRINK FIT HOLDER(CV CURVE)

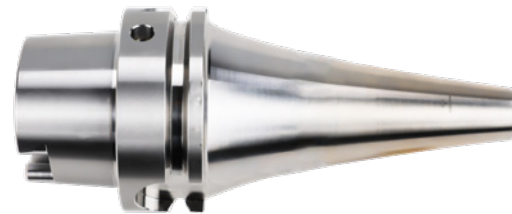
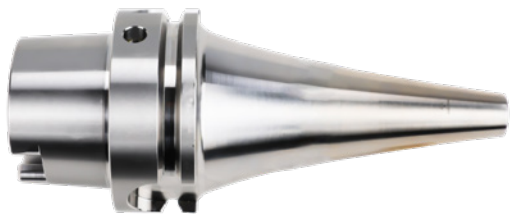


FIG.1



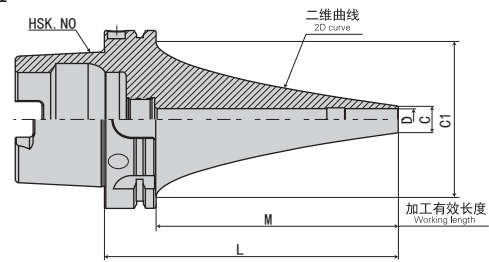


FIG.2

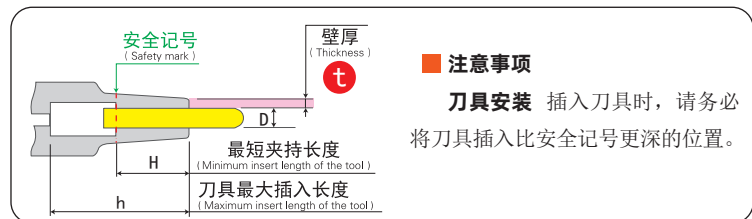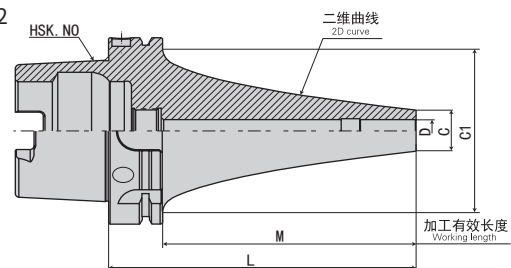

型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK100A-SLSA4-165CV	1	4	7	1.5	165	136	85	12	133	3.4	2.5
-195CV	1	4	7	1.5	195	166	85	12	163	3.7	3.3
-225CV	1	4	7	1.5	225	196	85	12	196	4.3	3.8
-255CV	1	4	7	1.5	255	226	85	12	226	4.4	5.6
-285CV	1	4	7	1.5	285	256	85	12	256	4.6	7.6
-315CV	1	4	7	1.5	315	286	85	12	286	4.9	9.8
-345CV	1	4	7	1.5	345	316	85	12	316	5.2	12.4
-SLSA6-165CV	1	6	9	1.5	165	136	85	18	136	3.3	2.1
-195CV	1	6	9	1.5	195	166	85	18	166	4	2.3
-225CV	1	6	9	1.5	225	196	85	18	196	4.1	3.6
-255CV	1	6	9	1.5	255	226	85	18	226	4.8	3.9
-285CV	1	6	9	1.5	285	256	85	18	256	5	5.2
-315CV	1	6	9	1.5	315	286	85	18	286	5.3	6.8
-345CV	1	6	9	1.5	345	316	85	18	316	5.6	8.7
-SLSA8-165CV	1	8	11	1.5	165	136	85	24	136	3.7	1.4
-195CV	1	8	11	1.5	195	166	85	24	166	3.7	2.3
-225CV	1	8	11	1.5	225	196	85	24	196	4.6	2.3
-255CV	1	8	11	1.5	255	226	85	24	226	4.6	3.6
-285CV	1	8	11	1.5	285	256	85	24	256	4.9	4.8
-315CV	1	8	11	1.5	315	286	85	24	286	5.7	5
-345CV	1	8	11	1.5	345	316	85	24	311	6.1	6
-SLRA8-195CV	2	8	16	4	195	166	85	24	166	3.7	1.4
-225CV	2	8	16	4	225	196	85	24	196	4.4	1.6
-255CV	2	8	16	4	255	226	85	24	226	4.6	2.2
-285CV	2	8	16	4	285	256	85	24	256	4.8	3
-SLFA8-195CV	2	8	16	4	195	166	85	24	166	3.7	1.4
-225CV	2	8	16	4	225	196	85	24	196	4.4	1.6
-255CV	2	8	16	4	255	226	85	24	226	4.6	2.2
-285CV	2	8	16	4	285	256	85	24	256	4.8	3

规格说明:

HSK100A - SLSA - 4 - 165 - CV
 锥柄形式 Taper size
 功能代号 Holder type
 刀杆直径 Diameter
 L 长度 Length (L)
 曲线型 Curve

·HSK100A-SL 热缩刀柄 (CV 曲线型) HSK100A-SL SHRINK FIT HOLDER(CV CURVE)



FIG.1



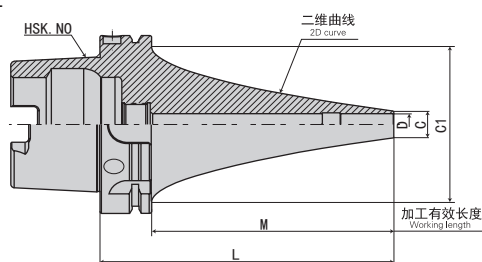


FIG.2


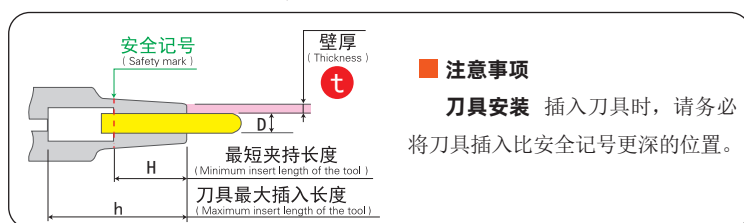
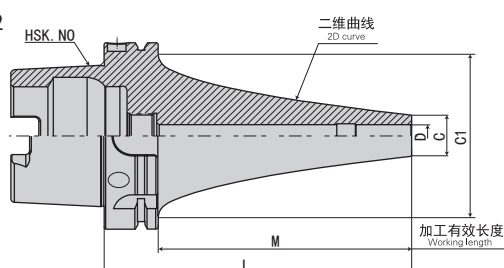


型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK100A-SLSA10-165CV	1	10	13	1.5	165	136	85	30	136	3.5	1.4
-195CV	1	10	13	1.5	195	166	85	30	166	4.3	1.5
-225CV	1	10	13	1.5	225	196	85	30	196	4.2	2.4
-255CV	1	10	13	1.5	255	226	85	30	226	4.5	3.5
-285CV	1	10	13	1.5	285	256	85	30	251	5.1	3.6
-315CV	1	10	13	1.5	315	286	85	30	286	5.1	4.8
-345CV	1	10	13	1.5	345	316	85	30	311	5.9	5.5
-SLRA10-165CV	2	10	19	4.5	165	136	85	30	136	3.5	1
-195CV	2	10	19	4.5	195	166	85	30	166	4	1.1
-225CV	2	10	19	4.5	225	196	85	30	196	4.1	1.6
-255CV	2	10	19	4.5	255	226	85	30	226	4.9	1.7
-285CV	2	10	19	4.5	285	256	85	30	256	5	2.4
-SLFA10-165CV	2	10	19	4.5	165	136	85	30	136	3.5	1
-195CV	2	10	19	4.5	195	166	85	30	166	4	1.1
-225CV	2	10	19	4.5	225	196	85	30	196	4.1	1.6
-255CV	2	10	19	4.5	255	226	85	30	226	4.9	1.7
-285CV	2	10	19	4.5	285	256	85	30	256	5	2.4
-SLSA12-165CV	1	12	15	1.5	165	136	85	30	133	4.2	1.2
-195CV	1	12	15	1.5	195	166	85	30	163	4.1	1.2
-225CV	1	12	15	1.5	225	196	85	30	175	4.8	1.8
-255CV	1	12	15	1.5	255	226	85	30	190	4.8	2.6
-285CV	1	12	15	1.5	285	256	85	30	251	5.5	3.5
-315CV	1	12	15	1.5	315	286	85	30	281	5.9	4.3
-345CV	1	12	15	1.5	345	316	85	30	311	6.2	5.3
-SLRA12-165CV	2	12	22	22	165	136	85	30	133	3.6	0.8
-195CV	2	12	22	22	195	166	85	30	163	4.4	0.8
-225CV	2	12	22	22	225	196	85	30	159	4.4	1.3
-255CV	2	12	22	22	255	226	85	30	221	4.6	1.6
-285CV	2	12	22	22	285	256	85	30	251	5	2.1

规格说明:

HSK100A - **SLSA** - **10** - **165** - **CV**
 锥柄形式 Taper size
 功能代号 Holder type
 刀杆直径 Diameter
 L 长度 Length (L)
 曲线型 Curve

·HSK100A-SL 热缩刀柄 (CV 曲线型) HSK100A-SL SHRINK FIT HOLDER(CV CURVE)

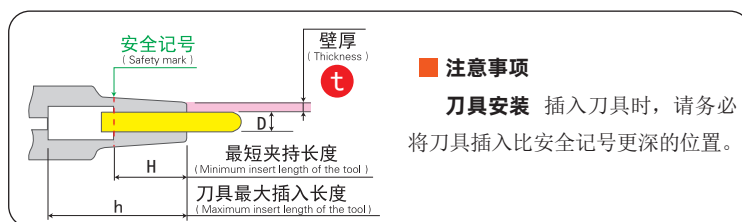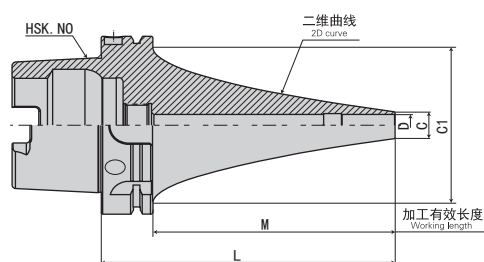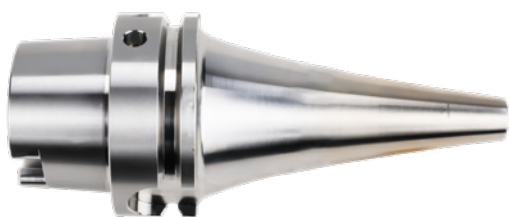



型号 Model	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK100A-SLFA12-165CV	12	22	22	165	136	85	30	133	3.6	0.8
 -195CV	12	22	22	195	166	85	30	163	4.4	0.8
-225CV	12	22	22	225	196	85	30	159	4.4	1.3
-255CV	12	22	22	255	226	85	30	221	4.6	1.6
-285CV	12	22	22	285	256	85	30	251	5	2.1
-SLSB16-165CV	16	21	2.5	165	136	85	32	131	4.2	0.6
-195CV	16	21	2.5	195	166	85	32	161	4	1.1
-225CV	16	21	2.5	225	196	85	32	191	4.8	1.2
-255CV	16	21	2.5	255	226	85	32	221	4.7	2
-285CV	16	21	2.5	285	256	85	32	251	5.5	2
-315CV	16	21	2.5	315	286	85	32	281	5.9	2.6
-345CV	16	21	2.5	345	316	85	32	311	6.2	3.3
-SLSB20-165CV	20	26	3	165	136	85	40	132	4	0.6
-195CV	20	26	3	195	166	85	40	161	4.9	0.7
-225CV	20	26	3	225	196	85	40	191	4.6	1.2
-255CV	20	26	3	255	226	85	40	221	5.5	1.3
-285CV	20	26	3	285	256	85	40	251	5.2	2.1
-315CV	20	26	3	315	286	85	40	281	6.1	2.3
-345CV	20	26	3	345	316	85	40	311	6.4	2.9

规格说明:

HSK100A - **SLFA** - **12** - **165** - **CV**
 • 锥柄形式 Taper size
 • 功能代号 Holder type
 • 刀杆直径 Diameter
 • L 长度 Length (L)
 • 曲线型 Curve

·HSK25E-SL 热缩刀柄（3°一体型）

HSK25E-SL SHRINK FIT HOLDER(3° MONO)

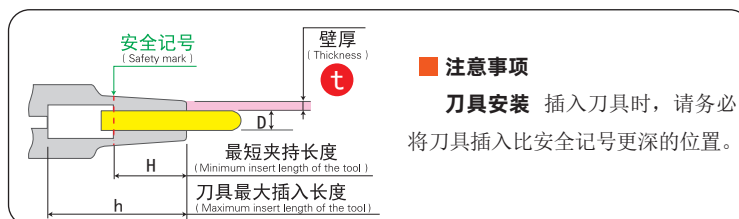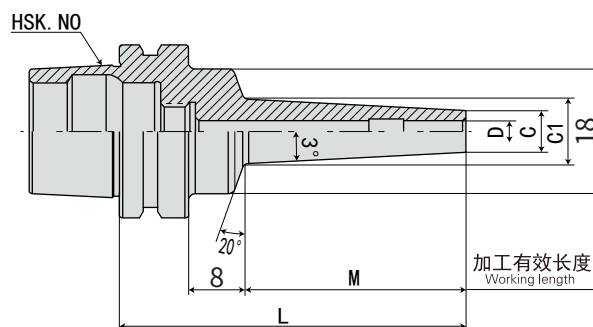

■ 注意事项

刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK25E-SLSA3- 35	3	6	1.5	35	17	7.8	9	29	0.06	3.6
- 50	3	6	1.5	50	32	9.4	9	44	0.06	7
-SLRA3- 35	3	7.5	2.25	35	17	9.3	9	29	0.06	2.3
-SLSA3.175-35	3.175	6.175	1.5	35	17	8	9	29	0.06	3.5
- 50	3.175	6.175	1.5	50	32	9.6	9	44	0.06	6.6
-SLSA4- 35	4	7	1.5	35	17	8.8	12	29	0.06	2.8
- 50	4	7	1.5	50	32	10.4	12	44	0.06	5.3
-SLRA4- 35	4	10	3	35	17	11.8	12	29	0.06	1.4
-SLSA5- 35	5	8	1.5	35	17	9.8	15	26	0.06	2.2
-SLSA6- 35	6	9	1.5	35	17	10.8	18	26	0.05	1.8
- 50	6	9	1.5	50	32	12.4	18	39	0.07	3.6
-SLRA6- 35	6	12	3	35	17	13.8	18	26	0.07	1.1

规格说明:

HSK25E - SLSA - 3 - 35

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)

·HSK32E-SL 热缩刀柄（3°一体型）

HSK32E-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



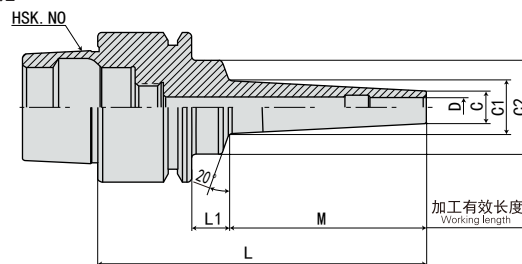


FIG.2

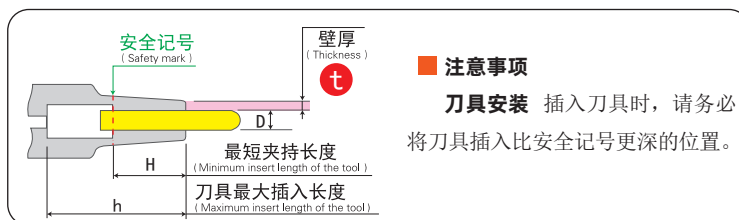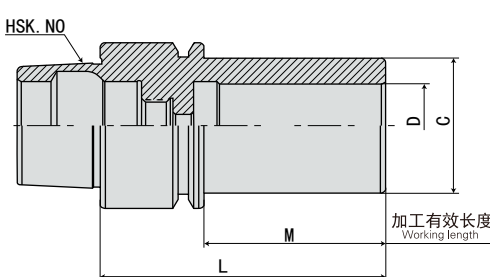

型号 Model	FIG	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
HSK32E-SLSA3- 50-M 22	1	3	6	1.5	50	22	8	8.3	20	9	42	0.1	4.7
- 70-M 42	1	3	6	1.5	70	42	8	10.4	20	9	62	0.2	9.5
- 85-M 42	1	3	6	1.5	85	42	23	10.4	25	9	77	0.2	9.4
-SLRA3- 50-M 22	1	3	7.5	2.25	50	22	8	9.8	20	9	42	0.1	2.8
- 70-M 42	1	3	7.5	2.25	70	42	8	11.9	20	9	62	0.2	5.3
- 85-M 42	1	3	7.5	2.25	85	42	23	11.9	25	9	77	0.2	5.5
-SLSA3.175- 50-M 22	1	3.175	6.175	1.5	50	22	8	8.5	20	9	42	0.1	4.4
-SLSA4- 50-M 22	1	4	7	1.5	50	22	8	9.3	20	12	42	0.1	3.6
- 70-M 42	1	4	7	1.5	70	42	8	11.4	20	12	62	0.2	7.3
- 85-M 42	1	4	7	1.5	85	42	23	11.4	25	12	77	0.2	7.4
-SLRA4- 50-M 22	1	4	10	3	50	22	8	12.3	20	12	42	0.2	1.7
- 70-M 42	1	4	10	3	70	42	8	14.4	20	12	62	0.2	3.1
- 85-M 42	1	4	10	3	85	42	23	14.4	25	12	77	0.2	3.2
-SLSA6- 70-M 42	1	6	9	1.5	70	42	8	13.4	20	18	62	0.2	4.8
-SLRA6- 50-M 22	1	6	12	3	50	22	8	14.3	26	18	39	0.2	1.2
- 70-M 42	1	6	12	3	70	42	8	16.4	26	18	62	0.2	2.4
- 85-M 42	1	6	12	3	85	42	23	16.4	25	18	77	0.2	2.5
-SLRA8- 50-M 22	1	8	14	3	50	22	8	16.3	26	24	39	0.2	1
- 85-M 42	1	8	14	3	85	42	23	18.4	25	24	48	0.2	2.1
-SLRA10- 55-M 22	1	10	16	3	55	22	13	18.3	26	25	44	0.2	0.9
-SLRA12- 55-M 22	1	12	20	4	55	22	13	22.3	26	30	44	0.2	0.7
-SLRA16- 55-M 35	2	16	26	5	55	35	*	*	*	32	44	0.2	0.7



规格说明:

HSK32E - SLSA - 3 - 50 - M22

- 加工有效长度 Working length
- L 长度 Length (L)
- 刀杆直径 Diameter
- 功能代号 Holder type
- 锥柄形式 Taper size

·HSK32E-SL 热缩刀柄（CV 曲线型）

HSK32E-SL SHRINK FIT HOLDER(CV CURVE)

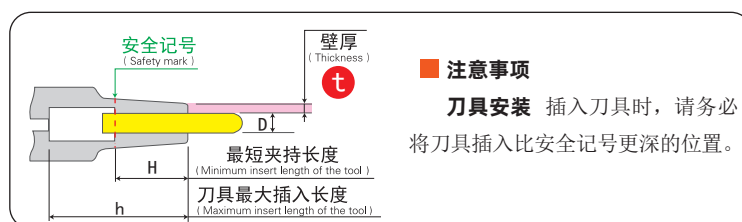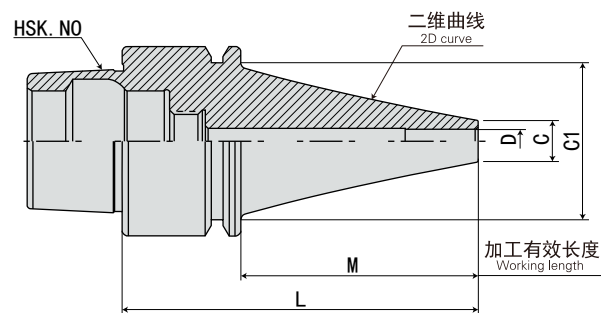

■ 注意事项
刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK32E-SLSA4- 60CV	4	7	1.5	60	40	26	12	43	0.2	2.4
- 90CV	4	7	1.5	90	70	26	12	73	0.2	6.1
-SLSA6- 60CV	6	9	1.5	60	40	26	18	43	0.2	1.9
- 90CV	6	9	1.5	90	70	26	18	73	0.2	4.9
-SLSA8- 60CV	8	11	1.5	60	40	26	24	38	0.2	1.6
- 90CV	8	11	1.5	90	70	26	24	38	0.2	4
-SLSA10- 60CV	10	13	1.5	60	40	26	30	48	0.2	1.4
- 90CV	10	13	1.5	90	70	26	30	60	0.2	3.5



规格说明:

HSK32E - SLSA - 4 - 60 - CV

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 曲线型 Curve

·HSK40E-SL 热缩刀柄（3°一体型）

HSK40E-SL SHRINK FIT HOLDER(3° MONO)

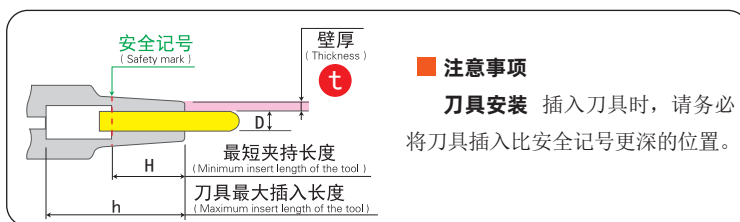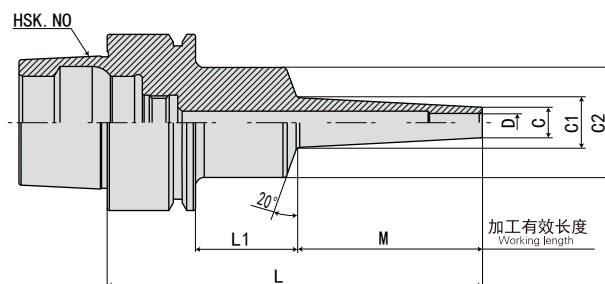

■ 注意事项

刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
HSK40E-SLSA3- 50-M 22	3	6	1.5	50	22	8	8.3	20	9	42	0.2	4.6
- 70-M 42	3	6	1.5	70	42	8	10.4	20	9	62	0.2	9.4
- 85-M 42	3	6	1.5	85	42	23	10.4	25	9	69	0.3	9.3
-110-M 67	3	6	1.5	110	67	23	13	25	9	94	0.3	15
-SLRA3- 50-M 22	3	7.5	2.25	50	22	8	9.8	20	9	42	0.2	2.8
- 70-M 42	3	7.5	2.25	70	42	8	11.9	20	9	62	0.2	5.3
- 85-M 42	3	7.5	2.25	85	42	23	11.9	25	9	69	0.3	5.4
-110-M 67	3	7.5	2.25	110	67	23	14.5	25	9	94	0.3	9
-SLSA3.175- 50-M 22	3.175	6.175	1.5	50	22	8	8.5	20	9	42	0.2	4.4
-SLSA4- 50-M 22	4	7	1.5	50	22	8	9.3	20	12	42	0.2	3.6
- 70-M 42	4	7	1.5	70	42	8	11.4	20	12	62	0.2	7.2
- 85-M 42	4	7	1.5	85	42	23	11.4	25	12	74	0.3	7.3
-110-M 67	4	7	1.5	110	67	23	14	25	12	99	0.3	11.9
-SLRA4- 50-M 22	4	10	3	50	22	8	12.3	20	12	42	0.2	1.6
- 70-M 42	4	10	3	70	42	8	14.4	20	12	62	0.3	3
- 85-M 42	4	10	3	85	42	23	14.4	25	12	69	0.3	3.1
-110-M 67	4	10	3	110	67	23	17	25	12	94	0.3	5.2
-SLSA6- 50-M 22	6	9	1.5	50	22	8	11.3	20	18	39	0.2	2.2
- 70-M 42	6	9	1.5	70	42	8	13.4	20	18	54	0.2	4.7
- 85-M 42	6	9	1.5	85	42	23	13.4	25	18	69	0.3	4.9
-110-M 67	6	9	1.5	110	67	23	16	25	18	94	0.3	8
-SLRA6- 50-M 22	6	12	3	50	22	8	14.3	26	18	39	0.2	1.2
- 70-M 42	6	12	3	70	42	8	16.4	26	18	54	0.3	2.3
- 85-M 42	6	12	3	85	42	23	16.4	25	18	69	0.3	2.5
-110-M 67	6	12	3	110	67	23	19	25	18	94	0.4	4.1

规格说明:

HSK40E - SLSA - 3 - 50 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK40E-SL 热缩刀柄（3°一体型）

HSK40E-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



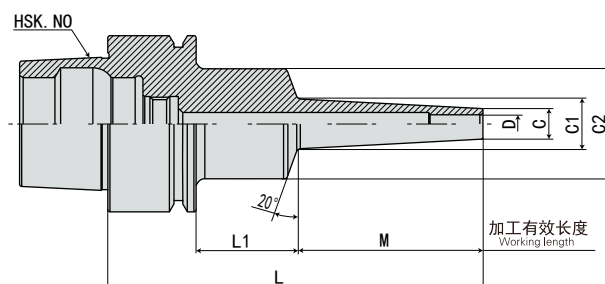


FIG.2

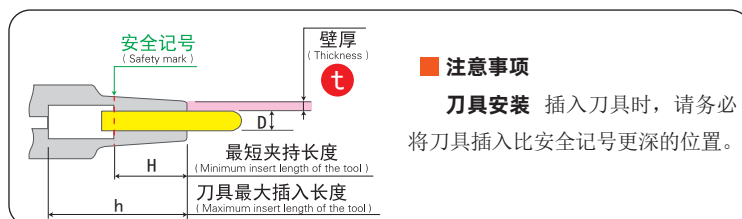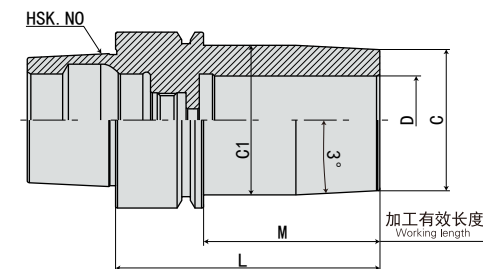


型号 Model	FIG	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
HSK40E-SLSA8- 60-M 22	1	8	11	1.5	60	22	18	13.3	26	24	49	0.3	1.5
- 80-M 42	1	8	11	1.5	80	42	18	15.4	26	24	64	0.3	3.3
-100-M 42	1	8	11	1.5	100	42	38	15.4	25	24	84	0.3	3.8
-SLRA8- 50-M 22	1	8	14	3	50	22	8	16.3	26	20	39	0.2	0.9
- 85-M 42	1	8	14	3	85	42	23	18.4	25	24	69	0.3	2.1
-100-M 42	1	8	14	3	100	42	38	18.4	25	24	84	0.4	2.4
-SLSA10- 60-M 22	1	10	13	1.5	60	22	18	15.3	26	30	49	0.3	1.2
- 80-M 42	1	10	13	1.5	80	42	18	17.4	26	30	64	0.3	2.4
-100-M 42	1	10	13	1.5	100	42	38	17.4	25	30	89	0.3	3.1
-SLRA10- 50-M 22	1	10	16	3	55	22	13	18.3	26	25	44	0.3	0.8
- 85-M 42	1	10	16	3	85	42	23	20.4	25	30	64	0.3	1.7
-100-M 42	1	10	16	3	100	42	38	20.4	25	30	64	0.4	2.2
-SLRA12- 55-M 22	1	12	20	4	55	22	13	22.3	26	25	44	0.3	0.6
- 85-M 42	1	12	20	4	85	42	23	24.4	32	30	74	0.4	1.1
-SLRA16- 55-M 22	1	16	26	5	55	22	13	28.3	34	32	44	0.3	0.4
-SLRA20- 60-M 40	2	20	32	6	60	40	*	34	*	38	49	0.4	0.4

规格说明:

HSK40E - SLSA - 8 - 60 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK40E-SL 热缩刀柄（CV 曲线型） HSK40E-SL SHRINK FIT HOLDER(CV CURVE)

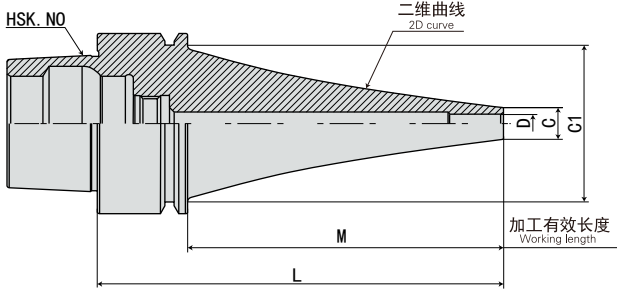

安全记号
(Safety mark)

壁厚
(Thickness)
t

最短夹持长度
(Minimum insert length of the tool)
H

刀具最大插入长度
(Maximum insert length of the tool)
h

■ 注意事项

刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK40E-SLSA4- 90CV	4	7	1.5	90	70	34	12	74	0.3	2.9
-120CV	4	7	1.5	120	100	34	12	104	0.4	6.5
-150CV	4	7	1.5	150	130	34	12	134	0.5	8.6
-SLRA4- 90CV	4	10	3	90	70	34	12	74	0.4	2
-120CV	4	10	3	120	100	34	12	104	0.4	4.2
-SLSA6- 90CV	6	9	1.5	90	70	34	18	74	0.3	2.5
-120CV	6	9	1.5	120	100	34	18	104	0.4	5.6
-150CV	6	9	1.5	150	130	34	18	134	0.5	7.7
-SLRA6- 90CV	6	13	3.5	90	70	34	18	74	0.4	1.7
-120CV	6	13	3.5	120	100	34	18	104	0.5	2.6
-SLSA8- 90CV	8	11	1.5	90	70	34	24	74	0.3	2.2
-120CV	8	11	1.5	120	100	34	24	104	0.4	3.4
-150CV	8	11	1.5	150	130	34	24	134	0.5	5.1
-SLRA8- 90CV	8	16	4	90	70	34	24	74	0.4	1.6
-120CV	8	16	4	120	100	34	24	104	0.5	2.4
-SLSA10- 90CV	10	13	1.5	90	70	34	30	74	0.3	2
-120CV	10	13	1.5	120	100	34	30	104	0.4	3.2
-150CV	10	13	1.5	150	130	34	30	134	0.5	5
-SLRA10- 90CV	10	19	4.5	90	70	34	30	74	0.4	1.1
-120CV	10	19	4.5	120	100	34	30	104	0.5	2

规格说明:

HSK40E - SLSA - 4 - 90 - CV

锥柄形式 Taper size



功能代号 Holder type

L 长度 Length (L)

曲线型 Curve

·HSK50E-SL 热缩刀柄（3°一体型）

HSK50E-SL SHRINK FIT HOLDER(3° MONO)

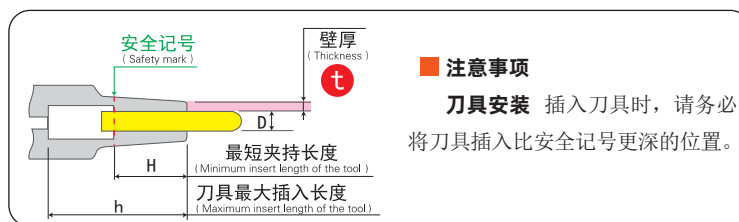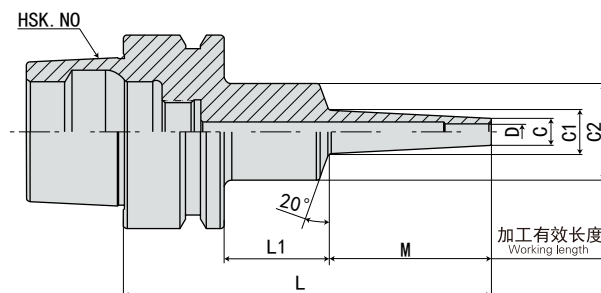

型号 Model	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
HSK50E-SLSA3- 60-M 22	3	6	1.5	60	22	12	8.3	20	9	50	0.4	4.7
- 75-M 22	3	6	1.5	75	22	27	8.3	25	9	61	0.5	4.5
- 80-M 42	3	6	1.5	80	42	12	10.4	20	9	70	0.5	9.3
- 95-M 42	3	6	1.5	95	42	27	10.4	25	9	81	0.5	9.1
-SLRA3- 75-M 22	3	7.5	2.25	75	22	27	9.8	25	9	61	0.5	2.8
- 95-M 42	3	7.5	2.25	95	42	27	11.9	25	9	81	0.5	5.3
-120-M 67	3	7.5	2.25	120	67	27	14.5	25	9	106	0.5	8.9
-150-M 97	3	7.5	2.25	150	97	27	17.7	25	9	136	0.6	12.9
-SLFB3- 75-M 22	3	9.5	3.25	75	22	27	11.8	25	9	61	0.5	1.9
-SLSA4- 75-M 22	4	7	1.5	75	22	27	9.3	25	12	61	0.5	3.6
- 95-M 42	4	7	1.5	95	42	27	11.4	25	12	81	0.5	7.2
-SLRA4- 75-M 22	4	10	3	75	22	27	12.3	25	12	61	0.5	1.7
- 95-M 42	4	10	3	95	42	27	14.4	25	12	81	0.5	3.1
-120-M 67	4	10	3	120	67	27	17	25	12	106	0.6	5.2
-150-M 97	4	10	3	150	97	27	20.2	25	12	135	0.7	7.8
-SLFB4- 75-M 22	4	12	4	75	22	27	14.3	25	12	61	0.5	1.4
-SLSA6- 75-M 22	6	9	1.5	75	22	27	11.3	25	18	61	0.5	2.3
- 95-M 42	6	9	1.5	95	42	27	13.4	25	18	81	0.5	4.8
-120-M 67	6	9	1.5	120	67	27	16	25	18	106	0.5	8.1
-150-M 97	6	9	1.5	150	97	27	19.2	32	18	135	0.6	11
-SLSB6- 95-M 42	6	10	2	95	42	27	14.4	25	18	81	0.5	3.7
-120-M 67	6	10	2	120	67	27	17	25	18	106	0.6	6.2
-150-M 97	6	10	2	150	97	27	20.2	32	18	135	0.7	8.5
-SLRA6- 75-M 22	6	12	3	75	22	27	14.3	25	18	61	0.5	1.3
- 95-M 42	6	12	3	95	42	27	16.4	25	18	81	0.5	2.5
-120-M 67	6	12	3	120	67	27	19	25	18	106	0.6	4.1
-SLRB6- 95-M 42	6	14	4	95	42	27	18.4	32	18	80	0.6	1.6
-SLFB6- 75-M 22	6	14	4	75	22	27	16.3	32	18	60	0.6	1

规格说明:



HSK50E - SLSA - 3 - 60 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length



·HSK50E-SL 热缩刀柄 (3°一体型)

HSK50E-SL SHRINK FIT HOLDER(3° MONO)

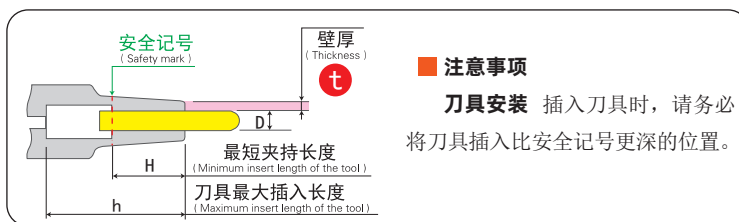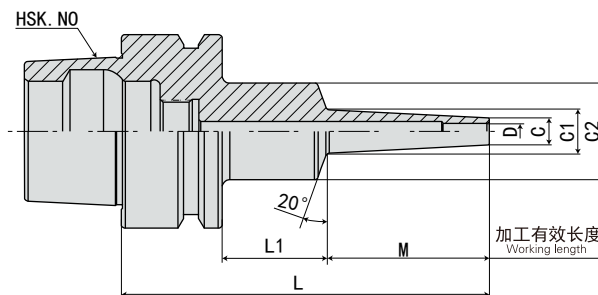

型号 Model	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
HSK50E-SLSA8- 65-M 22	8	11	1.5	65	22	17	13.3	26	24	49	0.5	1.5
- 75-M 22	8	11	1.5	75	22	27	15.4	25	24	61	0.5	1.6
- 85-M 42	8	11	1.5	85	42	17	15.4	26	24	67	0.5	3.2
- 95-M 42	8	11	1.5	95	42	27	15.4	25	24	81	0.5	3.5
-120-M 67	8	11	1.5	120	67	27	18	32	24	105	0.6	5.4
-150-M 97	8	11	1.5	150	97	27	21.2	32	24	132	0.7	8.1
-SLSB8- 95-M 42	8	13	2.5	95	42	27	17.4	32	24	80	0.6	2.1
-120-M 67	8	13	2.5	120	67	27	20	32	24	105	0.6	3.5
-150-M 97	8	13	2.5	150	97	27	23.2	32	24	135	0.7	5.3
-SLRA8- 60-M 22	8	14	3	60	22	12	16.3	26	24	44	0.5	0.9
- 75-M 22	8	14	3	75	22	27	16.3	25	24	61	0.5	1.1
- 95-M 42	8	14	3	95	42	27	18.4	25	24	81	0.5	2
-SLRB8- 95-M 42	8	18	5	95	42	27	22.4	32	24	80	0.6	1.1
-120-M 67	8	18	5	120	67	27	25	32	24	105	0.7	1.7
-SLFB8- 75-M 22	8	18	5	75	22	27	20.3	32	24	60	0.6	0.7
-SLSA10- 65-M 22	10	13	1.5	65	22	17	15.3	26	30	49	0.5	1.1
- 75-M 22	10	13	1.5	75	22	27	15.3	25	30	61	0.5	1.3
- 85-M 42	10	13	1.5	85	42	17	17.4	26	30	64	0.5	2.4
- 95-M 42	10	13	1.5	95	42	27	17.4	25	30	81	0.5	2.6
-120-M 67	10	13	1.5	120	67	27	20	32	30	105	0.6	4.1
-150-M 97	10	13	1.5	150	97	27	23.2	32	30	64	0.7	6.2
-SLSB10- 95-M 42	10	16	3	95	42	27	20.4	32	30	80	0.6	1.5
-120-M 67	10	16	3	120	67	27	23	32	30	105	0.7	2.4
-150-M 97	10	16	3	150	97	27	26.2	32	30	135	0.7	3.7
-SLRA10- 75-M 22	10	16	3	75	22	27	18.3	25	30	60	0.6	1
-SLRB10- 95-M 42	10	22	6	95	42	27	26.4	32	30	80	0.7	0.9
-120-M 67	10	22	6	120	67	27	29	42	30	107	0.8	1.1
-SLFB10- 75-M 22	10	22	6	75	22	27	24.3	32	30	60	0.6	0.6

规格说明:





HSK50E - SLSA - 8 - 65 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK50E-SL 热缩刀柄（3°一体型）

HSK50E-SL SHRINK FIT HOLDER(3° MONO)

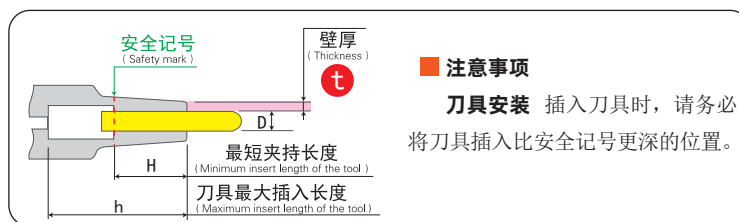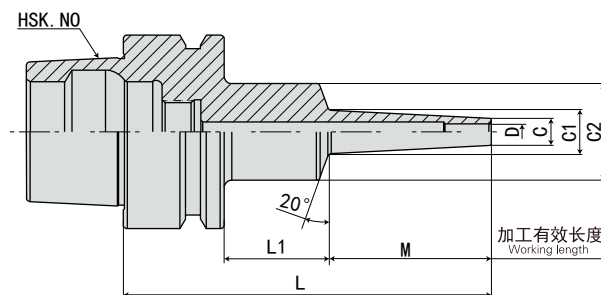

型号 Model	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
HSK50E-SLSA12- 65-M 22	12	15	1.5	65	22	17	17.3	26	25	49	0.5	0.9
- 75-M 22	12	15	1.5	75	22	27	17.3	25	30	60	0.5	1.1
- 95-M 42	12	15	1.5	95	42	27	19.4	32	30	80	0.5	1.9
-120-M 67	12	15	1.5	120	67	27	22	32	30	105	0.6	3.3
-SLSB12- 95-M 42	12	19	3.5	95	42	27	23.4	32	30	80	0.6	1.2
-120-M 67	12	19	3.5	120	67	27	26	32	30	105	0.7	1.9
-150-M 97	12	19	3.5	150	97	27	29.2	32	30	135	0.9	2.5
-SLRA12- 75-M 22	12	20	4	75	22	27	22.3	25	30	62	0.6	0.9
-SLRB12- 95-M 42	12	26	7	95	42	27	30.4	42	30	82	0.8	0.6
-120-M 67	12	26	7	120	67	27	33	42	30	107	0.9	0.9
-SLFB12- 75-M 22	12	26	7	75	22	27	28.3	42	30	62	0.7	0.4
-SLSB16- 95-M 42	16	24	4	95	42	27	28.4	42	32	82	0.7	0.7
-120-M 67	16	24	4	120	67	27	31	42	32	107	0.8	1.2
-SLRA16- 60-M 22	16	26	5	60	22	12	28.3	34	32	44	0.6	0.4
-SLRB16- 75-M 22	16	32	8	75	22	27	34.3	42	32	62	0.7	0.4
-SLFB16- 75-M 22	16	32	8	75	22	27	34.3	42	32	62	0.7	0.4
-SLSB20- 95-M 42	20	29	4.5	95	42	27	33.4	42	40	82	0.7	0.6
-SLRA20- 65-M 22	20	32	6	65	22	17	34.3	40	38	49	0.6	0.3




规格说明:

HSK50E - SLSA - 12 - 65 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·HSK50E-SL 热缩刀柄（CV 曲线型） HSK50E-SL SHRINK FIT HOLDER(CV CURVE)

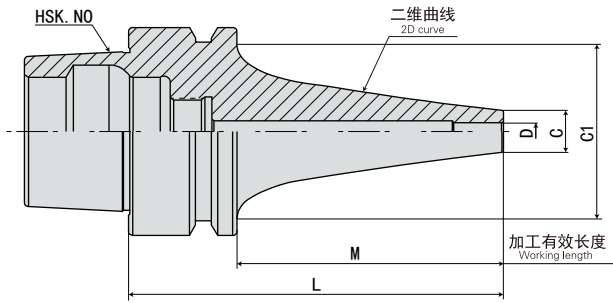

安全记号 (Safety mark)

壁厚 (Thickness) t

最短夹持长度 (Minimum insert length of the tool) H

刀具最大插入长度 (Maximum insert length of the tool) h

■ 注意事项

刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK50E-SLSA4- 90CV	4	7	1.5	90	64	42	12	74	0.6	1.8
-120CV	4	7	1.5	120	94	42	12	104	0.6	4.2
-150CV	4	7	1.5	150	124	42	12	134	0.7	6
-180CV	4	7	1.5	180	154	42	12	164	0.8	12
-SLRA4-120CV	4	10	3	120	94	42	12	104	0.7	2.7
-150CV	4	10	3	150	124	42	12	134	0.8	4.1
-SLSA6- 90CV	6	9	1.5	90	64	42	18	74	0.6	1.6
-120CV	6	9	1.5	120	94	42	18	104	0.6	3.5
-150CV	6	9	1.5	150	124	42	18	134	0.7	5.4
-180CV	6	9	1.5	180	154	42	18	164	0.9	7.6
-SLRA6-120CV	6	13	3.5	120	94	42	18	104	0.8	1.8
-150CV	6	13	3.5	150	124	42	18	132	0.9	2.7
-SLSA8- 90CV	8	11	1.5	90	64		24	74	0.6	1.4
-120CV	8	11	1.5	120	94	42	24	104	0.7	2.2
-150CV	8	11	1.5	150	124	42	24	134	0.7	4.9
-180CV	8	11	1.5	180	154	42	24	164	0.8	7.1
-SLRA8-120CV	8	16	4	120	94	42	24	102	0.8	1.3
-150CV	8	16	4	150	124	42	24	132	0.9	2.7
-SLSA10- 90CV	10	13	1.5	90	64	42	30	74	0.6	1.3
-120CV	10	13	1.5	120	94	42	30	104	0.7	2.1
-150CV	10	13	1.5	150	124	42	30	134	0.8	3.4
-180CV	10	13	1.5	180	154	42	30	162	0.8	6.9
-SLRA10-150CV	10	19	4.5	150	124	42	30	132	0.9	2.2

规格说明:

HSK50E - SLSA - 4 - 90 - CV

锥柄形式 Taper size

功能代号 Holder type



刀杆直径 Diameter

L 长度 Length (L)

曲线型 Curve

·HSK63F-SL 热缩刀柄（3°一体型）

HSK63F-SL SHRINK FIT HOLDER(3° MONO)

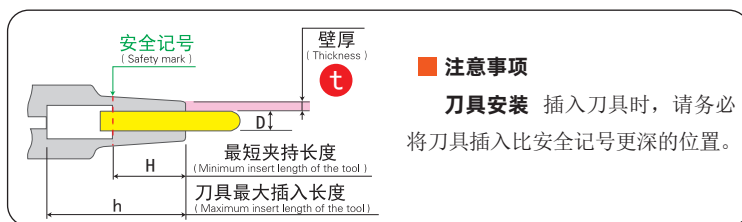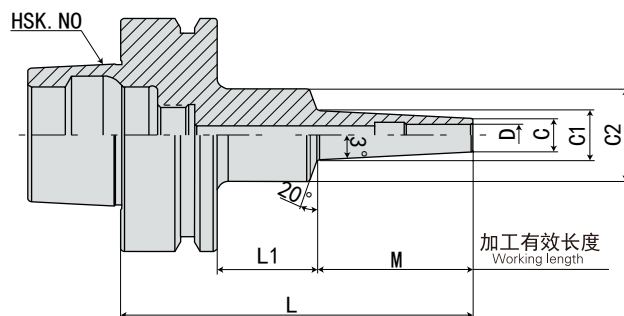

型号 Model	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
HSK63F-SLSA 3- 95-M 42	3	6	1.5	95	42	27	10.4	25	9	78	0.7	9.1
-SLRA 3- 75-M 22	3	7.5	2.25	75	22	27	9.8	25	9	54	0.7	2.8
- 95-M 42	3	7.5	2.25	95	42	27	11.9	25	9	78	0.7	5.3
-SLFB 3- 75-M 22	3	9.5	3.25	75	22	27	11.8	25	9	58	0.7	1.9
- 95-M 42	3	9.5	3.25	95	42	27	13.9	25	9	78	0.8	3.2
-120-M 67	3	9.5	3.25	120	67	27	16.5	25	9	103	0.8	5.4
-SLSA 4- 95-M 42	4	7	1.5	95	42	27	11.4	25	12	78	0.7	7.2
-SLRA 4- 75-M 22	4	10	3	75	22	27	12.3	25	12	58	0.7	1.7
- 95-M 42	4	10	3	95	42	27	14.4	25	12	78	0.8	3.1
-SLFB 4- 75-M 22	4	12	4	75	22	27	14.3	25	12	58	0.7	1.3
- 95-M 42	4	12	4	95	42	27	16.4	25	12	78	0.8	2.2
-120-M 67	4	12	4	120	67	27	19	25	12	103	0.8	3.6
-SLSA 6- 95-M 42	6	9	1.5	95	42	27	13.4	25	18	78	0.7	4.8
-SLSB 6- 95-M 42	6	10	2	95	42	27	14.4	25	18	78	0.7	3.7
-SLRA 6- 75-M 22	6	12	3	75	22	27	14.3	25	18	58	0.7	1.3
- 95-M 42	6	12	3	95	42	27	16.4	25	18	78	0.8	2.4
-SLFB 6- 75-M 22	6	14	4	75	22	27	16.3	32	18	58	0.8	1
-SLSA 8- 95-M 42	8	11	1.5	95	42	27	15.4	25	24	78	0.7	3.4
-SLSB 8- 95-M 42	8	13	2.5	95	42	27	17.4	32	24	78	0.8	2.1
-SLRA 8- 75-M 22	8	14	3	75	22	27	16.3	25	24	58	0.7	1.1
- 95-M 42	8	14	3	95	42	27	18.4	25	24	78	0.8	2
-SLFB 8- 75-M 22	8	18	5	75	22	27	20.3	32	24	58	0.8	0.7
-SLSA10- 95-M 42	10	13	1.5	95	42	27	17.4	25	30	74	0.8	2.6
-SLSB10- 95-M 42	10	16	3	95	42	27	20.4	32	30	74	0.8	1.4
-SLRA10- 75-M 22	10	16	3	75	22	27	18.3	25	30	54	0.8	1
-SLFB10- 75-M 22	10	22	6	75	22	27	24.3	32	30	54	0.8	0.6
-SLSA12- 95-M 42	12	15	1.5	95	42	27	19.4	32	30	74	0.8	1.8
-SLSB12- 95-M 42	12	19	3.5	95	42	27	23.4	32	30	74	0.8	1.1
-SLRA12- 75-M 22	12	20	4	75	22	27	22.3	25	30	54	0.9	0.8
-SLFB12- 75-M 22	12	26	7	75	22	27	28.3	42	30	54	0.9	0.4
-SLFB16- 75-M 22	16	32	8	75	22	27	34.3	42	32	54	1	0.3
-SLFB20- 75-M 22	20	38	9	75	22	27	40.3	50	40	53	1.1	0.3
-SLFB25- 75-M 22	25	45	10	75	22	27	47.3	50	45	53	1.1	0.2

规格说明:

HSK63F - SLSA - 3 - 95 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length



·HSK63F-SL 热缩刀柄 (CV 曲线型)

HSK63F-SL SHRINK FIT HOLDER(CV CURVE)



FIG.1



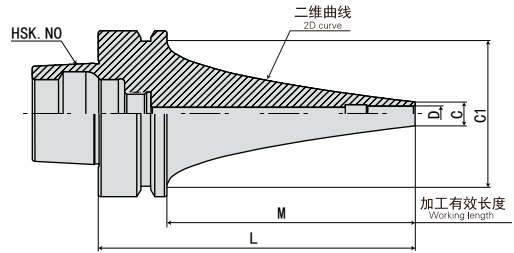


FIG.2

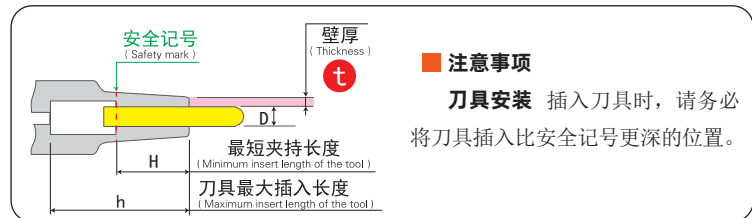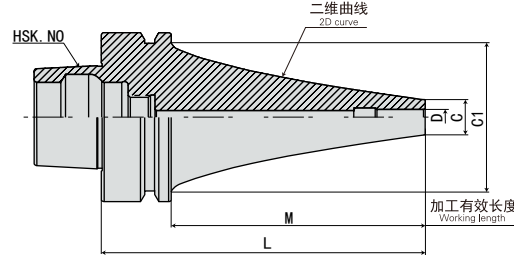

型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK63F-SLSA4- 90CV	1	4	7	1.5	90	64	53	12	65	0.9	1.8
-120CV	1	4	7	1.5	120	94	53	12	95	1	2.7
-150CV	1	4	7	1.5	150	124	53	12	125	1.2	4
-180CV	1	4	7	1.5	180	154	53	12	154	1.3	6.6
-210CV	1	4	7	1.5	210	184	53	12	185	1.3	11.6
-240CV	1	4	7	1.5	240	214	53	12	214	1.6	14
-270CV	1	4	7	1.5	270	244	53	12	245	1.9	11.9
-300CV	1	4	7	1.5	300	274	53	12	275	2	15.9
-SLRA4-120CV	2	4	10	3	120	94	53	12	95	1	1.9
-150CV	2	4	10	3	150	124	53	12	125	1.1	2.9
-180CV	2	4	10	3	180	154	53	12	155	1.4	3.3
-210CV	2	4	10	3	210	184	53	12	185	1.5	5.6
-SLSA6- 90CV	1	6	9	1.5	90	64	53	18	65	0.9	1.6
-120CV	1	6	9	1.5	120	94	53	18	95	1	2.3
-150CV	1	6	9	1.5	150	124	53	18	125	1.2	3.6
-180CV	1	6	9	1.5	180	154	53	18	154	1.3	5.7
-210CV	1	6	9	1.5	210	184	53	18	184	1.5	7.3
-240CV	1	6	9	1.5	240	214	53	18	214	1.6	12
-270CV	1	6	9	1.5	270	244	53	18	245	2	8.5
-300CV	1	6	9	1.5	300	274	53	18	275	2.2	11.7
-SLRA6- 90CV	2	6	13	3.5	90	64	53	18	65	1	0.8
-120CV	2	6	13	3.5	120	94	53	18	95	1.2	1.2
-150CV	2	6	13	3.5	150	124	53	18	125	1.3	1.9
-180CV	2	6	13	3.5	180	154	53	18	155	1.4	2.8
-210CV	2	6	13	3.5	210	184	53	18	185	1.5	4.8
-SLFA6- 90CV	2	6	13	3.5	90	64	53	18	65	1	0.8
-120CV	2	6	13	3.5	120	94	53	18	95	1.2	1.2
-150CV	2	6	13	3.5	150	124	53	18	125	1.3	1.9
-180CV	2	6	13	3.5	180	154	53	18	155	1.4	2.8
-210CV	2	6	13	3.5	210	184	53	18	185	1.5	4.8

规格说明:

HSK63F - SLSA - 4 - 90 - CV

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 曲线型 Curve

·HSK63F-SL 热缩刀柄（CV 曲线型）

HSK63F-SL SHRINK FIT HOLDER(CV CURVE)



FIG.1



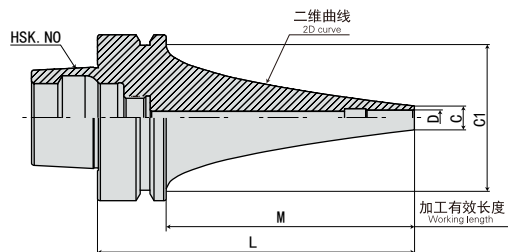


FIG.2

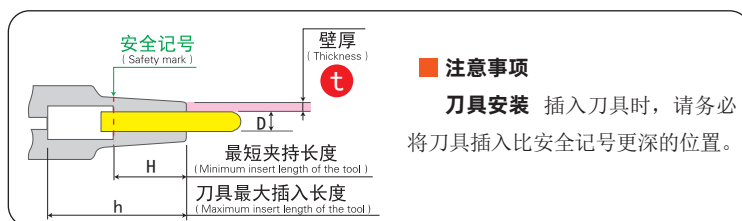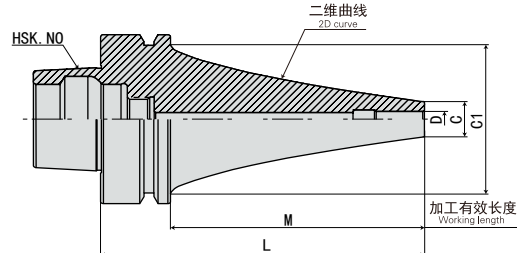

型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK63F-SLSA8- 90CV	1	8	11	1.5	90	64	53	24	65	0.9	1.4
-120CV	1	8	11	1.5	120	94	53	24	94	1.1	2
-150CV	1	8	11	1.5	150	124	53	24	124	1.3	2.7
-180CV	1	8	11	1.5	180	154	53	24	155	1.3	5
-210CV	1	8	11	1.5	210	184	53	24	184	1.5	6.6
-240CV	1	8	11	1.5	240	214	53	24	214	1.8	8.3
-270CV	1	8	11	1.5	270	244	53	24	244	2.1	6.9
-300CV	1	8	11	1.5	300	274	53	24	274	2.3	8.9
-SLRA8- 90CV	2	8	16	4	90	64	53	24	65	1	0.7
-120CV	2	8	16	4	120	94	53	24	95	1.2	1
-150CV	2	8	16	4	150	124	53	24	125	1.4	1.4
-180CV	2	8	16	4	180	154	53	24	155	1.6	2
-210CV	2	8	16	4	210	184	53	24	185	1.6	3.5
-SLFA8- 90CV	2	8	16	4	90	64	53	24	65	1	0.7
-120CV	2	8	16	4	120	94	53	24	95	1.2	1
-150CV	2	8	16	4	150	124	53	24	125	1.4	1.4
-180CV	2	8	16	4	180	154	53	24	155	1.6	2
-210CV	2	8	16	4	210	184	53	24	185	1.6	3.5
-SLSA10- 90CV	1	10	13	1.5	90	64	53	30	65	0.9	1.3
-120CV	1	10	13	1.5	120	94	53	30	95	1.2	1.3
-150CV	1	10	13	1.5	150	124	53	30	125	1.3	2.2
-180CV	1	10	13	1.5	180	154	53	30	154	1.5	3.4
-210CV	1	10	13	1.5	210	184	53	30	184	1.6	6
-240CV	1	10	13	1.5	240	214	53	30	212	2	5.8
-270CV	1	10	13	1.5	270	244	53	30	244	2.1	6.6
-300CV	1	10	13	1.5	300	274	53	30	274	2.3	8.5



规格说明:

HSK63F - SLSA - 8 - 90 - CV

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 曲线型 Curve

·HSK63F-SL 热缩刀柄（CV 曲线型）

HSK63F-SL SHRINK FIT HOLDER(CV CURVE)

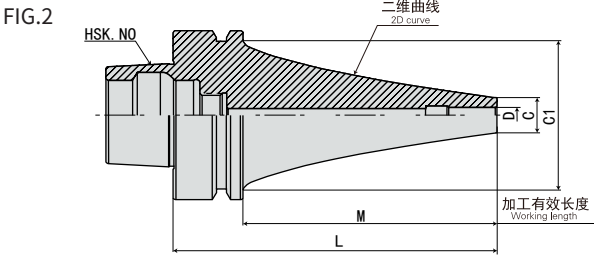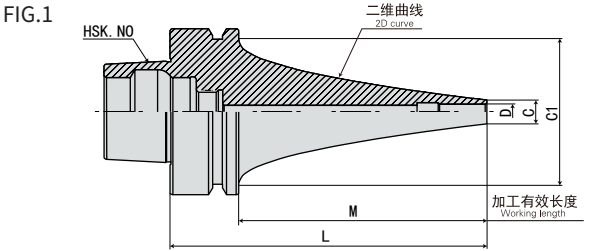

安全记号 (Safety mark)

壁厚 (Thickness) t

H

h

最短夹持长度 (Minimum insert length of the tool)

刀具最大插入长度 (Maximum insert length of the tool)

注意事项

刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK63F-SLRA10- 90CV	2	10	19	4.5	90	64	53	30	65	1	0.7
-120CV	2	10	19	4.5	120	94	53	30	95	1.2	1
-150CV	2	10	19	4.5	150	124	53	30	125	1.4	1.4
-180CV	2	10	19	4.5	180	154	53	30	155	1.6	2
-210CV	2	10	19	4.5	210	184	53	30	185	1.6	3.5
-SLFA10- 90CV	2	10	19	4.5	90	64	53	30	65	1	0.7
-120CV	2	10	19	4.5	120	94	53	30	95	1.2	1
-150CV	2	10	19	4.5	150	124	53	30	125	1.4	1.4
-180CV	2	10	19	4.5	180	154	53	30	155	1.6	2
-210CV	2	10	19	4.5	210	184	53	30	185	1.6	3.5
-SLSA12- 90CV	1	12	15	1.5	90	64	53	30	64	1	0.9
-120CV	1	12	15	1.5	120	94	53	30	94	1.2	1.2
-150CV	1	12	15	1.5	150	124	53	30	124	1.3	2.4
-180CV	1	12	15	1.5	180	154	53	30	154	1.5	3.3
-210CV	1	12	15	1.5	210	184	53	30	184	1.7	4.6
-240CV	1	12	15	1.5	240	214	53	30	212	2	5.5
-270CV	1	12	15	1.5	270	244	53	30	244	2.2	5.4
-SLRA12- 90CV	2	12	22	5	90	64	53	30	64	1	0.6
-120CV	2	12	22	5	120	94	53	30	94	1.3	0.7
-150CV	2	12	22	5	150	124	53	30	124	1.5	1.1
-180CV	2	12	22	5	180	154	53	30	154	1.6	1.8
-210CV	2	12	22	5	210	184	53	30	184	1.7	2.8
-SLFA12- 90CV	2	12	22	5	90	64	53	30	64	1	0.6
-120CV	2	12	22	5	120	94	53	30	94	1.3	0.7
-150CV	2	12	22	5	150	124	53	30	124	1.5	1.1
-180CV	2	12	22	5	180	154	53	30	154	1.6	1.8
-210CV	2	12	22	5	210	184	53	30	184	1.7	2.8

规格说明:

HSK63F - SLRA - 10 - 90 - CV

锥柄形式 Taper size

功能代号 Holder type

刀杆直径 Diameter

L 长度 Length (L)

曲线型 Curve

·HSK63F-SL 热缩刀柄（CV 曲线型）

HSK63F-SL SHRINK FIT HOLDER(CV CURVE)



FIG.1



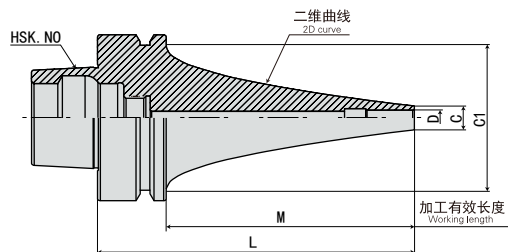


FIG.2

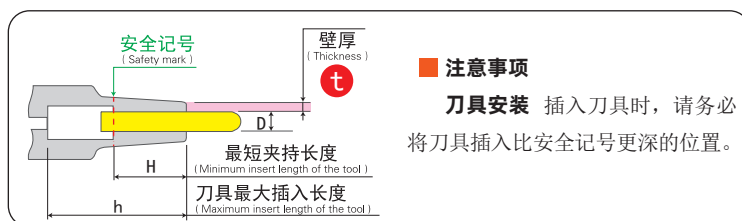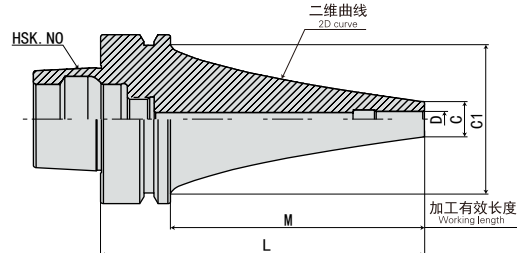

型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
HSK63F-SLSB16-90CV	2	16	21	2.5	90	64	53	32	62	1.1	0.6
-120CV	2	16	21	2.5	120	94	53	32	92	1.4	0.8
-150CV	2	16	21	2.5	150	124	53	32	122	1.5	1.5
-180CV	2	16	21	2.5	180	154	53	32	152	1.9	1.9
-210CV	2	16	21	2.5	210	184	53	32	182	2	3
-240CV	2	16	21	2.5	240	214	53	32	212	2.3	3.7
-270CV	2	16	21	2.5	270	244	53	32	242	2.7	4.6
-SLSB20-90CV	2	20	26	3	90	64	53	40	62	1.1	0.5
-120CV	2	20	26	3	120	94	53	40	92	1.4	0.8
-150CV	2	20	26	3	150	124	53	40	122	1.6	1.3
-180CV	2	20	26	3	180	154	53	40	152	2	1.8
-210CV	2	20	26	3	210	184	53	40	182	2.3	2.3
-240CV	2	20	26	3	240	214	53	40	212	2.6	3
-270CV	2	20	26	3	270	244	53	40	242	3.1	3.4


规格说明:

HSK63F - SLSB - 16 - 90 - CV

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 曲线型 Curve

·15TR-SL 热缩刀柄（3°一体型）

15TR-SL SHRINK FIT HOLDER(3° MONO)

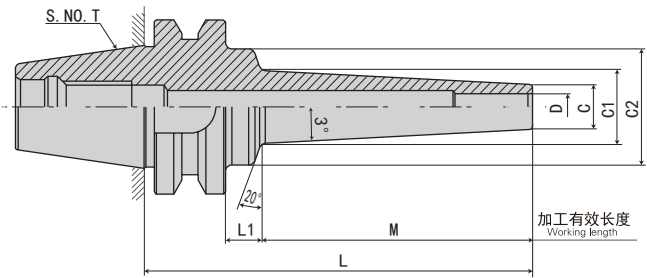

安全记号
(Safety mark)

壁厚
(Thickness)
t

最短夹持长度
(Minimum insert length of the tool)
H

刀具最大插入长度
(Maximum insert length of the tool)
h

■ 注意事项

刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
15TR3-SLSA3-40	3	6	1.5	40	22	5.5	8.3	18	9	46	0.1	4.7
-60	3	6	1.5	60	42	5.5	10.4	18	9	66	0.1	9.3
-SLSA3.175-40	3.175	6.175	1.5	40	22	5.5	8.5	18	9	46	0.1	4.4
-60	3.175	6.175	1.5	60	42	5.5	10.6	18	9	66	0.1	8.8
-SLSA4-40	4	7	1.5	40	22	5.5	9.3	18	12	46	0.1	3.6
-60	4	7	1.5	60	42	5.5	11.4	18	12	66	0.1	7.3
-SLSA5-40	5	8	1.5	40	22	5.5	10.3	18	15	46	0.1	2.9
-60	5	8	1.5	60	42	5.5	12.4	18	15	66	0.1	5.9
-SLSA6-60	6	9	1.5	60	42	5.5	13.4	18	18	66	0.1	4.9
-SLRA6-35	6	12	3	35	19.6	2.9	14.1	*	18	46	0.1	1.2
-SLRA8-35	8	14	3	35	19.6	2.9	16.1	*	20	51	0.1	0.9
-SLRA10-35	10	16	3	35	19.6	2.9	18.1	*	20	51	0.1	0.8

规格说明:

15TR - SLSA - 3 - 40

● L 长度 Length (L)



● 刀杆直径 Diameter

● 功能代号 Holder type

● 锥柄形式 Taper size

·S20TR-SL 热缩刀柄（3°一体型）

S20TR-SL SHRINK FIT HOLDER(3° MONO)

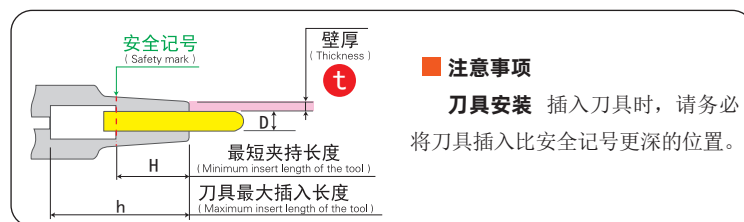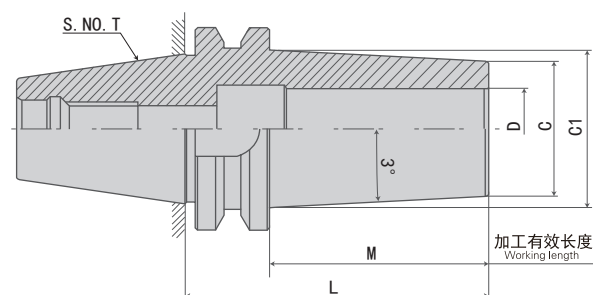

■ 注意事项
刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
S20TR2-SLSA3-40	3	6	1.5	40	22	5.5	8.3	20	9	46	0.1	4.6
-60	3	6	1.5	60	42	5.5	10.4	20	9	66	0.1	9.2
-SLSA3.175-40	3.175	6.175	1.5	40	22	5.5	8.5	20	9	46	0.1	4.4
-60	3.175	6.175	1.5	60	42	5.5	10.6	20	9	66	0.1	8.8
-SLSA4-40	4	7	1.5	40	22	5.5	9.3	20	12	46	0.1	3.6
-60	4	7	1.5	60	42	5.5	11.4	20	12	66	0.1	7.2
-SLSA5-40	5	8	1.5	40	22	5.5	10.3	20	15	46	0.1	2.8
-60	5	8	1.5	60	42	5.5	12.4	20	15	66	0.1	5.8
-SLSA6-60	6	9	1.5	60	42	5.5	13.4	20	18	66	0.1	4.7
-SLRA6-35	6	12	3	35	19.6	2.9	14.1	*	18	46	0.1	1.1
-SLRA8-35	8	14	3	35	19.6	2.9	16.1	*	20	51	0.1	0.9
-SLRA10-35	10	16	3	35	19.6	2.9	18.1	*	20	51	0.1	0.8
-SLRA12-45	12	20	4	45	32.5	*	23.4	*	30	51	0.2	0.8



规格说明:

S20TR - SLSA - 3 - 40

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)

·BT30-SL 热缩刀柄（3°一体型）

BT30-SL SHRINK FIT HOLDER(3° MONO)

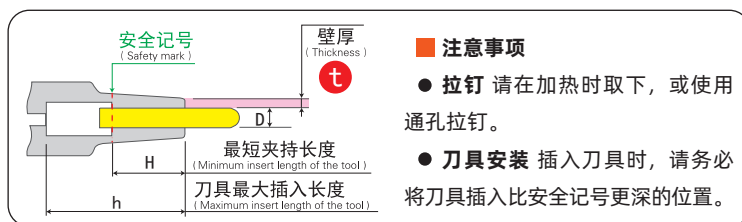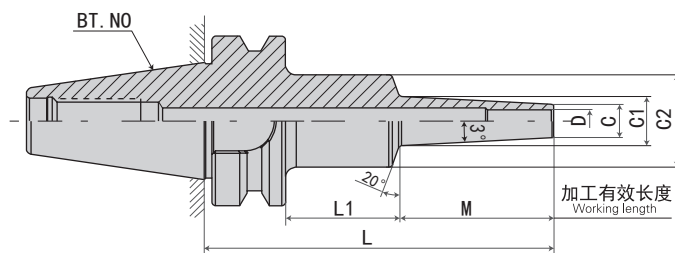

型号 Model	D	C	t	L	M	L1	C1	C2	H	h	重量 KGS	S
BT30-SLSA3- 75-M 22	3	6	1.5	75	22	31	8.3	25	9	99	0.4	4.6
- 95-M 42	3	6	1.5	95	42	31	10.4	25	9	119	0.4	9.2
-120-M 67	3	6	1.5	120	67	31	13	25	9	144	0.5	14.9
-SLRA3- 75-M 22	3	7.5	2.25	75	22	31	9.8	25	9	99	0.5	2.8
-SLSA3.175- 75-M 22	3.175	6.175	1.5	75	22	31	8.5	25	9	99	0.4	4.4
-95-M 42	3.175	6.175	1.5	95	42	31	10.6	25	9	119	0.4	8.8
-SLSA4- 75-M 22	4	7	1.5	75	22	31	9.3	25	12	99	0.4	3.6
- 95-M 42	4	7	1.5	95	42	31	11.4	25	12	119	0.4	7.3
-120-M 67	4	7	1.5	120	67	31	14	25	12	144	0.5	11.9
-SLRA 4- 75-M 22	4	10	3	75	22	31	12.3	25	12	99	0.5	1.8
-SLSA6- 75-M 22	6	9	1.5	75	22	31	11.3	25	18	99	0.4	2.4
- 95-M 42	6	9	1.5	95	42	31	13.4	25	18	119	0.4	4.9
-120-M 67	6	9	1.5	120	67	31	16	25	18	144	0.5	8.3
-SLRA6- 75-M 22	6	12	3	75	22	31	14.3	25	18	99	0.4	1.4
-SLRA8- 75-M 22	8	14	3	75	22	31	16.3	25	24	99	0.4	1.2
-SLRA10- 75-M 22	10	16	3	75	22	31	18.3	25	30	99	0.4	1.1
-SLRA12- 75-M 22	12	20	4	75	22	31	22.3	25	30	99	0.5	1
-SLRA16- 60-M 22	16	26	5	60	22	16	28.3	34	32	60	0.5	0.5
-SLRA20- 65-M 22	20	32	6	65	22	21	34.3	40	38	60	0.5	0.4

规格说明:

BT30 - SLSA - 3 - 75 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT30-SL 热缩刀柄（CV 曲线型）

BT30-SL SHRINK FIT HOLDER(CV CURVE)



FIG.1




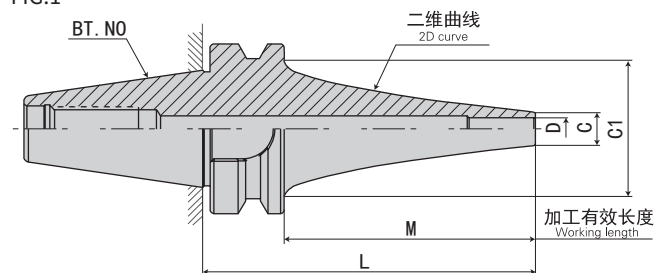


FIG.2

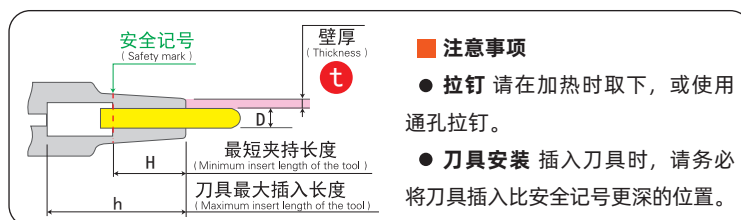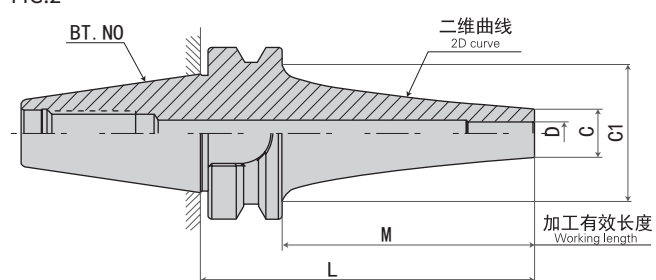

型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
BT30-SLSA4- 75CV	1	4	7	1.5	75	53	34	12	99	0.5	1.8
- 90CV	1	4	7	1.5	90	68	34	12	114	0.5	2.8
-120CV	1	4	7	1.5	120	98	34	12	144	0.5	6.6
-SLRA4- 90CV	2	4	10	3	90	68	34	12	114	0.5	2
-120CV	2	4	10	3	120	98	34	12	144	0.5	2.9
-SLSA6- 75CV	1	6	9	1.5	75	53	34	18	99	0.5	1.5
- 90CV	1	6	9	1.5	90	68	34	18	114	0.5	2.4
-120CV	1	6	9	1.5	120	98	34	18	144	0.5	5.6
-SLRA6- 90CV	2	6	13	3.5	90	68	34	18	114	0.5	1.6
-120CV	2	6	13	3.5	120	98	34	18	144	0.5	2.5
-SLSA8- 75CV	1	8	11	1.5	75	53	34	24	99	0.5	1.3
- 90CV	1	8	11	1.5	90	68	34	24	114	0.6	2.2
-SLRA8- 90CV	2	8	16	4	90	68	34	24	114	0.5	1.1
-SLSA10- 75CV	1	10	13	1.5	75	53	34	30	99	0.5	1.2
- 90CV	1	10	13	1.5	90	68	34	30	114	0.5	2
-SLRA10- 90CV	1	10	19	4.5	90	68	34	30	114	0.6	1.1

规格说明:

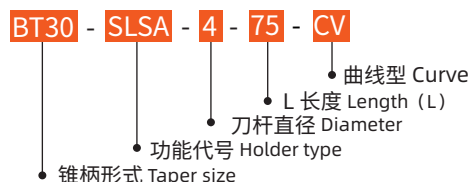

·BT40-SL 热缩刀柄（3°一体型）

BT40-SL SHRINK FIT HOLDER(3° MONO)



FIG.1




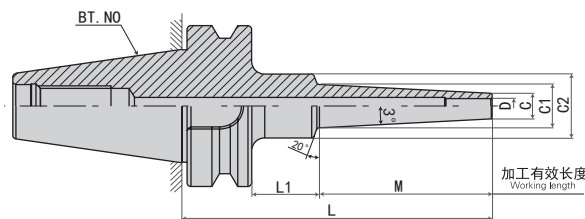


FIG.2

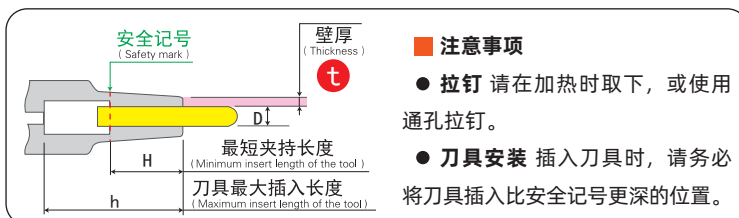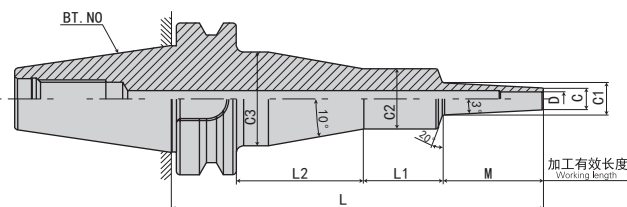

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT40-SLSA3- 95-M 42	1	3	6	1.5	95	42	26	*	10.4	25	*	9	130	1	9.1
-120-M 67	1	3	6	1.5	120	67	26	*	13	25	*	9	155	1	14.6
-125-M 42	1	3	6	1.5	125	42	56	*	10.4	25	*	9	160	1.1	9.7
-150-M 67	1	3	6	1.5	150	67	56	*	13	25	*	9	185	1.1	15.7
-M 97	1	3	6	1.5	150	97	26	*	16.2	25	*	9	185	1.1	20.4
-155-M 42	2	3	6	1.5	155	42	33	53	10.4	26	40	9	190	1.4	9.9
-180-M 67	2	3	6	1.5	180	67	33	53	13	25	39	9	215	1.4	15.7
-M 97	1	3	6	1.5	180	97	56	*	16.2	25	*	9	215	1.2	22.1
-210-M 97	2	3	6	1.5	210	97	33	53	16.2	25	39	9	245	1.4	22.1
-SLRA3- 75-M 22	1	3	7.5	2.25	75	22	26	*	9.8	25	*	9	110	1	2.7
- 95-M 42	1	3	7.5	2.25	95	42	26	*	11.9	25	*	9	130	1	5.3
-105-M 22	1	3	7.5	2.25	105	22	56	*	9.8	25	*	9	140	1.1	3.2
-120-M 67	1	3	7.5	2.25	120	67	26	*	14.5	25	*	9	155	1.1	8.8
-125-M 42	1	3	7.5	2.25	125	42	56	*	11.9	25	*	9	160	1.1	6
-135-M 22	2	3	7.5	2.25	135	22	33	53	9.8	25	39	9	170	1.4	3.2
-150-M 67	1	3	7.5	2.25	150	67	56	*	14.5	25	*	9	185	1.2	14.5
-M 97	1	3	7.5	2.25	150	97	26	*	17.7	25	*	9	185	1.1	12.8
-155-M 42	2	3	7.5	2.25	155	42	33	53	11.9	25	39	9	190	1.4	6
-180-M 67	2	3	7.5	2.25	180	67	33	53	14.5	26	40	9	215	1.4	9.8
-M 97	1	3	7.5	2.25	180	97	56	*	17.7	25	*	9	215	1.2	14.3
-M127	1	3	7.5	2.25	180	127	26	*	20.8	36	*	9	215	1.1	15.7
-210-M 97	2	3	7.5	2.25	210	97	33	53	17.7	25	39	9	245	1.5	14.4
-M127	1	3	7.5	2.25	210	127	56	*	20.8	32	*	9	245	1.4	16.5
-240-M127	2	3	7.5	2.25	240	127	28	58	20.8	36	50	9	275	1.8	16.3

规格说明:

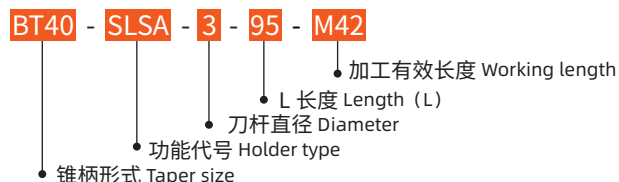

·BT40-SL 热缩刀柄（3°一体型）

BT40-SL SHRINK FIT HOLDER(3° MONO)



FIG.1


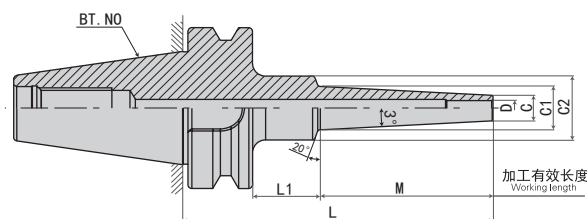


FIG.2

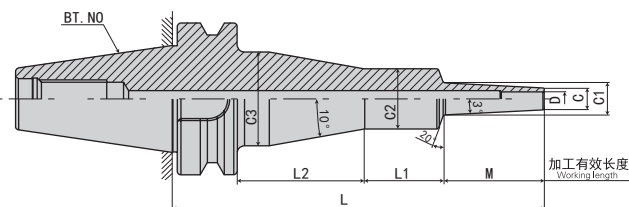

安全记号 (Safety mark)

壁厚 (Thickness) t

最短夹持长度 (Minimum insert length of the tool) H

刀具最大插入长度 (Maximum insert length of the tool) h

注意事项

- 拉钉 请在加热时取下，或使用通孔拉钉。
- 刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT40-SLFB3- 75-M 22	1	3	9.5	3.25	75	22	26	*	11.8	25	*	9	110	1	1.9
- 95-M 42	1	3	9.5	3.25	95	42	26	*	13.9	25	*	9	130	1	3.2
-105-M 22	1	3	9.5	3.25	105	22	56	*	11.8	25	*	9	140	1.1	2.3
-120-M 67	1	3	9.5	3.25	120	67	26	*	16.5	25	*	9	155	1.1	5.3
-125-M 42	1	3	9.5	3.25	125	42	56	*	13.9	25	*	9	160	1.1	3.9
-135-M 22	2	3	9.5	3.25	135	22	33	53	11.8	25	39	9	170	1.4	2.3
-150-M 67	1	3	9.5	3.25	150	67	56	*	16.5	25	*	9	185	1.2	6.4
-155-M 42	2	3	9.5	3.25	155	42	33	53	13.9	25	39	9	190	1.4	3.9
-180-M 67	2	3	9.5	3.25	180	67	33	53	16.5	26	40	9	215	1.4	6.3
-SLSA4- 95-M 42	1	4	7	1.5	95	42	26	*	11.4	25	*	12	130	1	7.1
-120-M 67	1	4	7	1.5	120	67	26	*	14	25	*	12	155	1	11.7
-125-M 42	1	4	7	1.5	125	42	56	*	11.4	25	*	12	160	1.1	7.9
-150-M 67	1	4	7	1.5	150	67	56	*	14	25	*	12	185	1.1	12.8
-M 97	1	4	7	1.5	150	97	26	*	17.2	25	*	12	185	1.1	16.5
-155-M 42	2	4	7	1.5	155	42	33	53	11.4	25	39	12	190	1.4	7.9
-180-M 67	2	4	7	1.5	180	67	33	53	14	25	39	12	215	1.4	12.8
-M 97	1	4	7	1.5	180	97	56	*	17.2	25	*	12	215	1.2	18.3
-210-M 97	2	4	7	1.5	210	97	33	53	17.2	25	39	12	245	1.5	18.2
-SLRA4- 75-M 22	1	4	10	3	75	22	26	*	12.3	25	*	12	110	1	1.7
- 95-M 42	1	4	10	3	95	42	26	*	14.4	25	*	12	130	1	3.1
-105-M 22	1	4	10	3	105	22	56	*	12.3	25	*	12	140	1.1	2.2
-120-M 67	1	4	10	3	120	67	26	*	17	25	*	12	155	1.1	5.1
-125-M 42	1	4	10	3	125	42	56	*	14.4	25	*	12	160	1.1	3.8
-135-M 22	2	4	10	3	135	22	33	53	12.3	25	39	12	170	1.4	2.2
-150-M 67	1	4	10	3	150	67	56	*	17	25	*	12	185	1.2	6.3
-M 97	1	4	10	3	150	97	26	*	20.2	25	*	12	185	1.1	7.7

规格说明:

BT40 - SLFB - 3 - 75 - M22

- 加工有效长度 Working length
- L 长度 Length (L)
- 刀杆直径 Diameter
- 功能代号 Holder type
- 锥柄形式 Taper size

·BT40-SL 热缩刀柄（3°一体型）

BT40-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



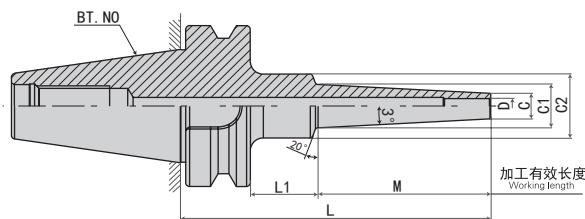


FIG.2

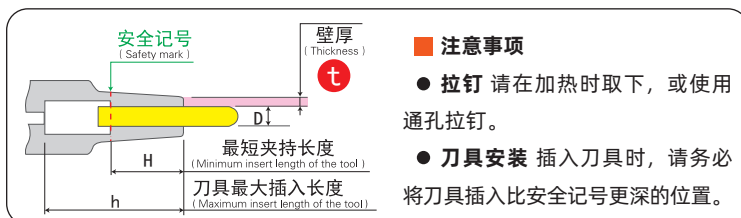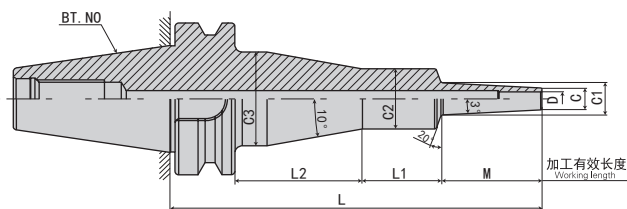

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT40-SLRA4-155-M 42	2	4	10	3	155	42	33	53	14.4	25	39	12	190	1.4	3.8
-180-M 67	2	4	10	3	180	67	33	53	17	25	39	12	215	1.4	6.2
-M 97	1	4	10	3	180	97	56	*	20.2	25	*	12	215	1.2	9.5
-M127	1	4	10	3	180	127	26	*	23.3	32	*	12	215	1.2	9.4
-210-M 97	2	4	10	3	210	97	33	53	20.2	25	39	12	245	1.5	9.4
-M127	1	4	10	3	210	127	56	*	23.3	32	*	12	245	1.4	10.3
-240-M127	2	4	10	3	240	127	30	56	23.3	32	46	12	275	1.8	10.4
-SLFB4- 75-M 22	1	4	12	4	75	22	26	*	14.3	25	*	12	110	1	1.3
- 95-M 42	1	4	12	4	95	42	26	*	16.4	25	*	12	130	1.1	2.2
-105-M 22	1	4	12	4	105	22	56	*	14.3	25	*	12	140	1.1	1.8
-120-M 67	1	4	12	4	120	67	26	*	19	25	*	12	155	1.1	3.5
-125-M 42	1	4	12	4	125	42	56	*	16.4	25	*	12	160	1.2	2.9
-135-M 22	2	4	12	4	135	22	33	53	14.3	25	39	12	170	1.4	1.8
-150-M 67	1	4	12	4	150	67	56	*	19	25	*	12	185	1.2	4.7
-155-M 42	2	4	12	4	155	42	33	53	16.4	25	39	12	190	1.4	2.9
-180-M 67	2	4	12	4	180	67	33	53	19	25	39	12	215	1.5	4.7
-SLSA6- 95-M 42	1	6	9	1.5	95	42	26	*	13.4	25	*	18	130	1	4.8
-120-M 67	1	6	9	1.5	120	67	26	*	16	25	*	18	155	1.1	8
-125-M 42	1	6	9	1.5	125	42	56	*	13.4	25	*	18	160	1.1	5.6
-150-M 67	1	6	9	1.5	150	67	56	*	16	25	*	18	185	1.2	9.2
-M 97	1	6	9	1.5	150	97	26	*	19.2	32	*	18	185	1.1	11
-155-M 42	2	6	9	1.5	155	42	33	53	13.4	25	39	18	190	1.4	5.6
-180-M 67	2	6	9	1.5	180	67	33	53	16	25	39	18	215	1.4	9.2
-M 97	1	6	9	1.5	180	97	56	*	19.2	32	*	18	215	1.3	11.7
-210-M 97	2	6	9	1.5	210	97	30	56	19.2	32	46	18	245	1.7	11.7

规格说明:

BT40 - SLRA - 4 - 155 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT40-SL 热缩刀柄（3°一体型）

BT40-SL SHRINK FIT HOLDER(3° MONO)



FIG.1




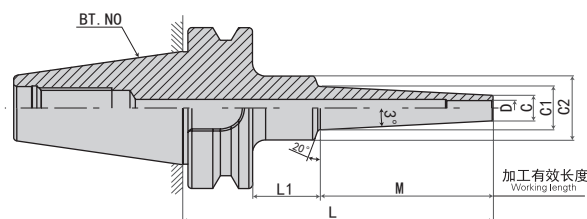


FIG.2

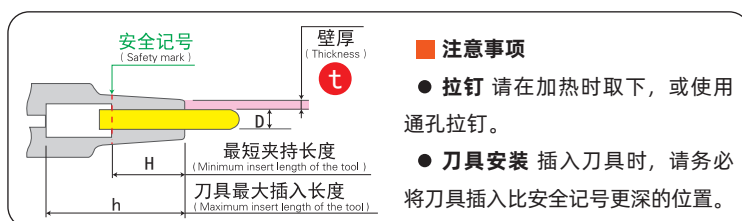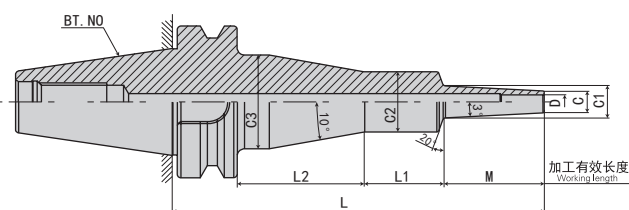

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT40-SLSB6- 95-M 42	1	6	10	2	95	42	26	*	14.4	25	*	18	130	1	3.6
-120-M 67	1	6	10	2	120	67	26	*	17	25	*	18	155	1.1	6.1
-125-M 42	1	6	10	2	125	42	56	*	14.4	25	*	18	160	1.1	4.5
-150-M 67	1	6	10	2	150	67	56	*	17	25	*	18	185	1.2	7.4
-M 97	1	6	10	2	150	97	26	*	20.2	32	*	18	185	1.2	8.5
-155-M 42	2	6	10	2	155	42	33	53	14.4	25	39	18	190	1.4	4.4
-180-M 67	2	6	10	2	180	67	33	53	17	25	39	18	215	1.4	7.4
-M 97	1	6	10	2	180	97	56	*	20.2	32	*	18	215	1.3	9.2
-M127	1	6	10	2	180	127	26	*	23.3	32	*	18	215	1.2	11
-210-M 97	2	6	10	2	210	97	30	56	20.2	32	46	18	245	1.7	9.2
-M127	1	6	10	2	210	127	56	*	23.3	32	*	18	245	1.4	12
-M157	1	6	10	2	210	157	26	*	26.5	32	*	18	245	1.3	13.2
-240--M127	2	6	10	2	240	127	30	56	23.3	32	46	18	275	1.8	12
-M157	1	6	10	2	240	157	56	*	26.5	36	*	18	275	1.7	14.5
-270-M157	2	6	10	2	270	157	30	56	26.5	32	46	18	305	1.9	14.6
-SLRB6- 75-M 22	1	6	14	4	75	22	26	*	16.3	32	*	18	110	1.1	1
- 95-M 42	1	6	14	4	95	42	26	*	18.4	32	*	18	130	1.1	1.6
-105-M 22	1	6	14	4	105	22	56	*	16.3	32	*	18	140	1.2	1.2
-120-M 67	1	6	14	4	120	67	26	*	21	32	*	18	155	1.2	2.6
-125-M 42	1	6	14	4	125	42	56	*	18.4	32	*	18	160	1.3	1.9
-135-M 22	2	6	14	4	135	22	30	56	16.3	32	46	18	170	1.6	1.2
-150-M 67	1	6	14	4	150	67	56	*	21	32	*	18	185	1.3	3
-155-M 42	2	6	14	4	155	42	30	56	18.4	32	46	18	190	1.6	1.9
-180-M 67	2	6	14	4	180	67	30	56	21	32	46	18	215	1.7	3.1

规格说明:

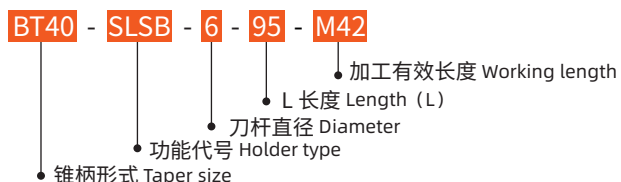

·BT40-SL 热缩刀柄（3°一体型）

BT40-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



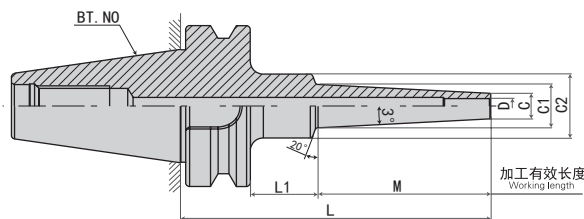


FIG.2

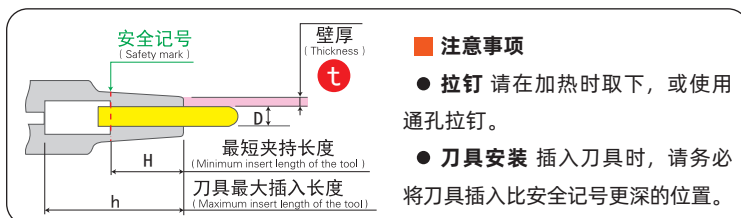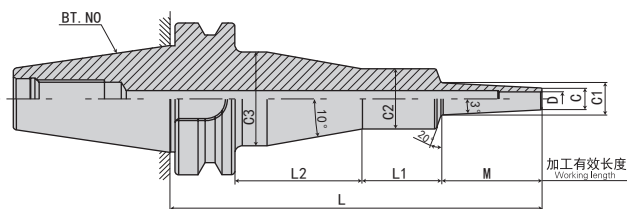

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT40-SLFB6- 75-M 22	1	6	14	4	75	22	26	*	16.3	32	*	18	110	1.1	1
- 95-M 42	1	6	14	4	95	42	26	*	18.4	32	*	18	130	1.1	1.6
-105-M 22	1	6	14	4	105	22	56	*	16.3	32	*	18	140	1.2	1.2
-120-M 67	1	6	14	4	120	67	26	*	21	32	*	18	155	1.2	2.6
-125-M 42	1	6	14	4	125	42	56	*	18.4	32	*	18	160	1.3	1.9
-135-M 22	2	6	14	4	135	22	30	56	16.3	32	46	18	170	1.6	1.2
-150-M 67	1	6	14	4	150	67	56	*	21	32	*	18	185	1.3	3
-155-M 42	2	6	14	4	155	42	30	56	18.4	32	46	18	190	1.6	1.9
-180-M 67	2	6	14	4	180	67	30	56	21	32	46	18	215	1.7	3.1
-SLSA8- 95-M 42	1	8	11	1.5	95	42	26	*	15.4	25	*	24	130	1	3.4
-120-M 67	1	8	11	1.5	120	67	26	*	18	32	*	24	155	1.1	5.4
-125-M 42	1	8	11	1.5	125	42	56	*	15.4	25	*	24	160	1.1	4.3
-150-M 67	1	8	11	1.5	150	67	56	*	18	32	*	24	185	1.3	5.9
-M 97	1	8	11	1.5	150	97	26	*	21.2	32	*	24	185	1.2	7.9
-155-M 42	2	8	11	1.5	155	42	33	53	15.4	25	39	24	190	1.4	4.3
-180-M 67	2	8	11	1.5	180	67	30	56	18	32	46	24	215	1.6	5.9
-M 97	1	8	11	1.5	180	97	56	*	21.2	32	*	24	215	1.3	8.7
-210-M 97	2	8	11	1.5	210	97	28	58	21.2	36	50	24	245	1.9	8.4
-SLSB8- 95-M 42	1	8	13	2.5	95	42	26	*	17.4	32	*	24	130	1.1	2.1
-120-M 67	1	8	13	2.5	120	67	26	*	20	32	*	24	155	1.1	3.5
-125-M 42	1	8	13	2.5	125	42	56	*	17.4	36	*	24	160	1.3	2.3
-150-M 67	1	8	13	2.5	150	67	56	*	20	32	*	24	185	1.3	4
-M 97	1	8	13	2.5	150	97	26	*	23.2	32	*	24	185	1.2	5.2
-155-M 42	2	8	13	2.5	155	42	30	56	17.4	32	46	24	190	1.6	2.5

规格说明:

BT40 - SLFB - 6 - 75 - M22

- 加工有效长度 Working length
- L 长度 Length (L)
- 刀杆直径 Diameter
- 功能代号 Holder type
- 锥柄形式 Taper size

·BT40-SL 热缩刀柄（3°一体型）

BT40-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



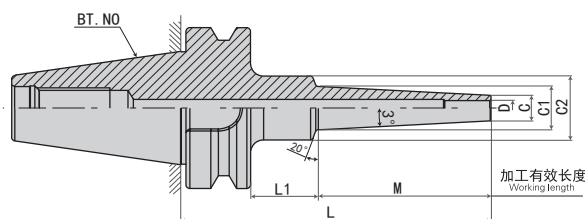


FIG.2

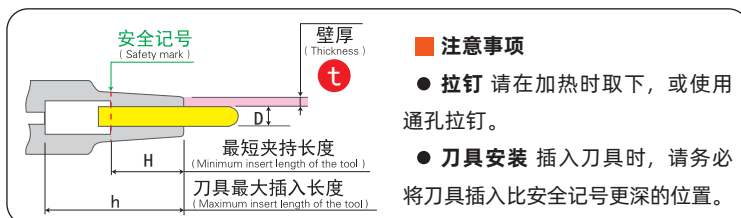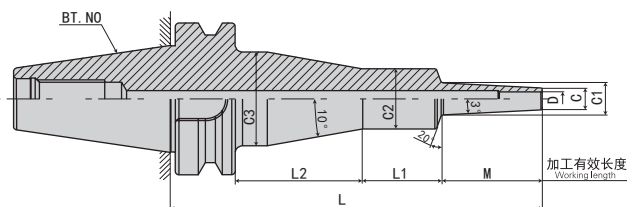

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT40-SLSB8-180-M 67	2	8	13	2.5	180	67	30	56	20	32	46	24	215	1.7	4
-M 97	1	8	13	2.5	180	97	56	*	23.2	32	*	24	215	1.4	6
-M127	1	8	13	2.5	180	127	26	*	26.3	32	*	24	215	1.3	7
-210-M 97	2	8	13	2.5	210	97	30	56	23.2	32	46	24	245	1.7	6
-M127	1	8	13	2.5	210	127	56	*	26.3	36	*	24	245	1.5	7.7
-M157	1	8	13	2.5	210	157	26	*	29.5	36	*	24	245	1.4	8.5
-240-M127	2	8	13	2.5	240	127	30	56	26.3	32	46	24	275	1.8	8.1
-M157	1	8	13	2.5	240	157	56	*	29.5	42	*	24	275	1.7	8.6
-270-M157	2	8	13	2.5	270	157	28	58	29.5	42	53	24	305	2.2	8.7
-SLRB8- 75-M 22	1	8	18	5	75	22	26	*	20.3	32	*	24	110	1.1	0.7
- 95-M 42	1	8	18	5	95	42	26	*	22.4	32	*	24	130	1.1	1.1
-105-M 22	1	8	18	5	105	22	56	*	20.3	32	*	24	140	1.2	0.9
-120-M 67	1	8	18	5	120	67	26	*	25	32	*	24	155	1.2	1.7
-125-M 42	1	8	18	5	125	42	56	*	22.4	32	*	24	160	1.3	1.4
-135-M 22	2	8	18	5	135	22	30	56	20.3	32	46	24	170	1.6	1
-150-M 67	1	8	18	5	150	67	56	*	25	32	*	24	185	1.4	2.2
-155-M 42	2	8	18	5	155	42	30	56	22.4	32	46	24	190	1.7	1.5
-180-M 67	2	8	18	5	180	67	30	56	25	32	46	24	215	1.8	2.2
-SLFB8- 75-M 22	1	8	18	5	75	22	26	*	20.3	32	*	24	110	1.1	0.7
- 95-M 42	1	8	18	5	95	42	26	*	22.4	32	*	24	130	1.1	1.1
-105-M 22	1	8	18	5	105	22	56	*	20.3	32	*	24	140	1.2	0.9
-120-M 67	1	8	18	5	120	67	26	*	25	32	*	24	155	1.2	1.7
-125-M 42	1	8	18	5	125	42	56	*	22.4	32	*	24	160	1.3	1.4
-135-M 22	2	8	18	5	135	22	30	56	20.3	32	46	24	170	1.6	1
-150-M 67	1	8	18	5	150	67	56	*	25	32	*	24	185	1.4	2.2
-155-M 42	2	8	18	5	155	42	30	56	22.4	32	46	24	190	1.7	1.5
-180-M 67	2	8	18	5	180	67	28	58	25	36	50	24	215	1.9	2

规格说明:

BT40 - SLSB - 8 - 180 - M67

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT40-SL 热缩刀柄（3°一体型）

BT40-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



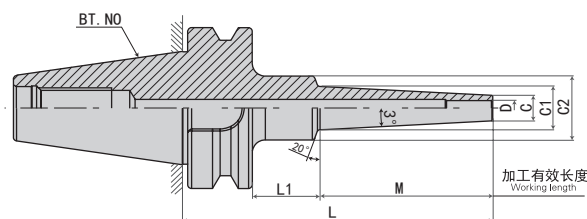


FIG.2

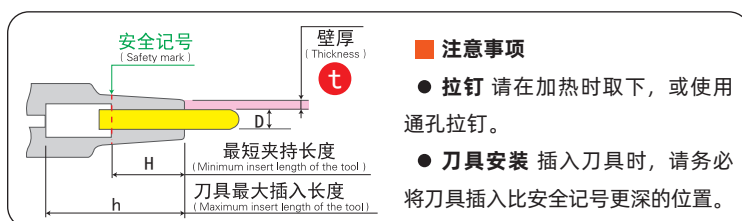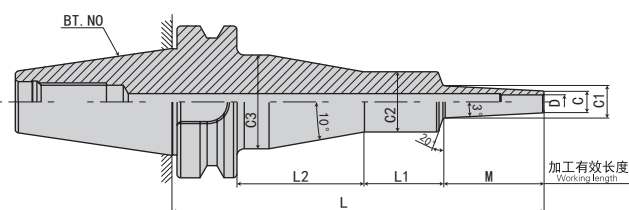

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT40-SLSA10- 95-M 42	1	10	13	1.5	95	42	26	*	17.4	25	*	30	130	1	2.6
-120-M 67	1	10	13	1.5	120	67	26	*	20	32	*	30	155	1.1	4
-125-M 42	1	10	13	1.5	125	42	56	*	17.4	25	*	30	160	1.1	3.6
-150-M 67	1	10	13	1.5	150	67	56	*	20	32	*	30	185	1.3	4.6
-M 97	1	10	13	1.5	150	97	26	*	23.2	32	*	30	185	1.2	6
-155-M 42	2	10	13	1.5	155	42	30	53	17.4	25	39	30	190	1.4	3.6
-180-M 67	2	10	13	1.5	180	67	28	58	20	36	50	30	215	1.8	4.4
-M 97	1	10	13	1.5	180	97	56	*	23.2	32	*	30	215	1.3	6.9
-210-M 97	2	10	13	1.5	210	97	30	56	23.2	32	46	30	245	1.7	6.9
-SLSB10- 95-M 42	1	10	16	3	95	42	26	*	20.4	32	*	30	130	1.1	1.4
-120-M 67	1	10	16	3	120	67	26	*	23	32	*	30	155	1.2	2.4
-125-M 42	1	10	16	3	125	42	56	*	20.4	32	*	30	160	1.3	1.8
-150-M 67	1	10	16	3	150	67	56	*	23	32	*	30	185	1.3	3
-M 97	1	10	16	3	150	97	26	*	26.2	32	*	30	185	1.3	3.6
-155-M 42	2	10	16	3	155	42	30	56	20.4	32	46	30	190	1.6	1.9
-180-M 67	2	10	16	3	180	67	30	56	23	32	46	30	215	1.7	3
-M 97	1	10	16	3	180	97	56	*	26.2	32	*	30	215	1.4	4.5
-M127	1	10	16	3	180	127	26	*	29.3	42	*	30	215	1.4	4.5
-210-M 97	2	10	16	3	210	97	30	56	26.2	32	46	30	245	1.8	4.5
-M127	1	10	16	3	210	127	56	*	29.3	42	*	30	245	1.6	4.9
-M157	1	10	16	3	210	157	26	*	32.5	42	*	30	245	1.5	5.6
-240-M127	1	10	16	3	240	127	86	*	29.3	50	*	30	275	2.1	5
-M157	1	10	16	3	240	157	56	*	32.5	50	*	30	275	1.8	5.8
-270-M157	2	10	16	3	270	157	28	58	32.5	42	53	30	305	2.3	6.3

规格说明:

BT40 - SLSA - 10 - 95 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT40-SL 热缩刀柄（3°一体型）

BT40-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



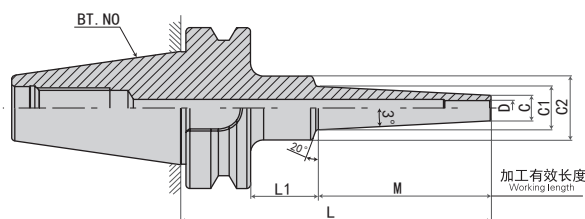


FIG.2

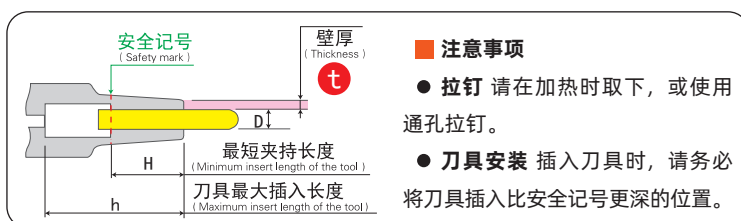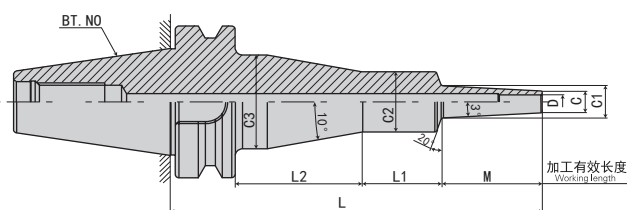

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT40-SLRB10- 75-M 22	1	10	22	6	75	22	26	*	24.3	32	*	30	110	1.1	0.6
- 95-M 42	1	10	22	6	95	42	26	*	26.4	32	*	30	130	1.2	0.8
-105-M 22	1	10	22	6	105	22	56	*	24.3	32	*	30	140	1.3	0.8
-120-M 67	1	10	22	6	120	67	26	*	29	42	*	30	155	1.3	1.1
-125-M 42	1	10	22	6	125	42	56	*	26.4	32	*	30	160	1.3	1.2
-135-M 22	2	10	22	6	135	22	30	56	24.3	32	46	30	170	1.7	0.9
-150-M 67	1	10	22	6	150	67	56	*	29	42	*	30	185	1.5	1.3
-155-M 42	2	10	22	6	155	42	30	56	26.4	32	46	30	190	1.7	1.3
-180-M 67	2	10	22	6	180	67	28	58	29	42	53	30	215	2.1	1.4
-SLFB10- 75-M 22	1	10	22	6	75	22	26	*	24.3	32	*	30	110	1.1	0.6
- 95-M 42	1	10	22	6	95	42	26	*	26.4	32	*	30	130	1.2	0.8
-105-M 22	1	10	22	6	105	22	56	*	24.3	32	*	30	140	1.3	0.8
-120-M 67	1	10	22	6	120	67	26	*	29	42	*	30	155	1.3	1.1
-125-M 42	1	10	22	6	125	42	56	*	26.4	32	*	30	160	1.3	1.2
-135-M 22	2	10	22	6	135	22	30	56	24.3	32	46	30	170	1.7	0.9
-150-M 67	1	10	22	6	150	67	56	*	29	42	*	30	185	1.5	1.3
-155-M 42	2	10	22	6	155	42	28	58	26.4	36	50	30	190	1.9	1.1
-180-M 67	2	10	22	6	180	67	28	58	29	42	53	30	215	2.1	1.4
-SLSA12- 95-M 42	1	12	15	1.5	95	42	26	*	19.4	32	*	30	130	1.1	1.8
-120-M 67	1	12	15	1.5	120	67	26	*	22	32	*	30	155	1.1	3.3
-125-M 42	1	12	15	1.5	125	42	56	*	19.4	32	*	30	160	1.2	2.3
-150-M 67	1	12	15	1.5	150	67	56	*	22	36	*	30	185	1.4	3.6
-M 97	1	12	15	1.5	150	97	26	*	25.2	32	*	30	185	1.2	4.9
-155-M 42	2	12	15	1.5	155	42	30	56	19.4	32	46	30	190	1.6	2.3
-180-M 67	2	12	15	1.5	180	67	30	56	22	32	46	30	215	1.7	3.9
-M 97	1	12	15	1.5	180	97	56	*	25.2	32	*	30	215	1.4	5.8
-210-M 97	2	12	15	1.5	210	97	30	56	25.2	32	46	30	245	1.7	5.8

规格说明:

BT40 - SLRB - 10 - 75 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT40-SL 热缩刀柄（3°一体型）

BT40-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



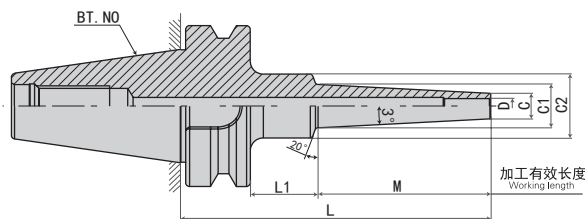


FIG.2

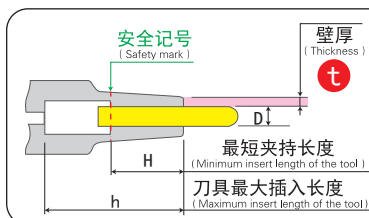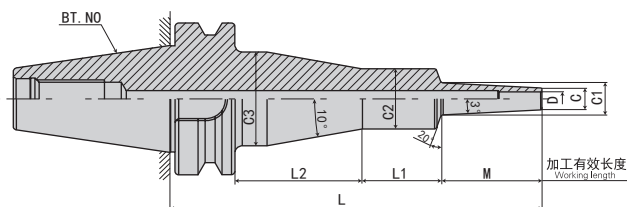

■ 注意事项

- 拉钉 请在加热时取下，或使用通孔拉钉。
- 刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT40-SLSB12- 95-M 42	1	12	19	3.5	95	42	26	*	23.4	32	*	30	130	1.1	1.1
-120-M 67	1	12	19	3.5	120	67	26	*	26	32	*	30	155	1.2	1.8
-125-M 42	1	12	19	3.5	125	42	56	*	23.4	32	*	30	160	1.3	1.5
-150-M 67	1	12	19	3.5	150	67	56	*	26	32	*	30	185	1.3	2.5
-M 97	1	12	19	3.5	150	97	26	*	29.2	42	*	30	185	1.3	2.4
-155-M 42	2	12	19	3.5	155	42	30	56	23.4	32	46	30	190	1.7	1.6
-180-M 67	2	12	19	3.5	180	67	28	58	26	36	50	30	215	1.9	2.2
-M 97	1	12	19	3.5	180	97	56	*	29.2	50	*	30	215	1.7	2.6
-M127	1	12	19	3.5	180	127	26	*	32.3	42	*	30	215	1.5	3.3
-210-M 97	2	12	19	3.5	210	97	28	58	29.2	42	53	30	245	2.1	2.9
-M127	1	12	19	3.5	210	127	56	*	32.3	50	*	30	245	1.9	3.5
-M157	1	12	19	3.5	210	157	26	*	35.5	42	*	30	245	1.7	4.1
-240-M127	1	12	19	3.5	240	127	86	*	32.3	50	*	30	275	2.2	3.8
-M157	1	12	19	3.5	240	157	56	*	35.5	42	*	30	275	1.9	4.7
-270-M157	2	12	19	3.5	270	157	28	58	35.5	42	53	30	305	2.4	4.8
-SLRB12- 75-M 22	1	12	26	7	75	22	26	*	28.3	42	*	30	110	1.2	0.4
- 95-M 42	1	12	26	7	95	42	26	*	30.4	42	*	30	130	1.2	0.6
-105-M 22	1	12	26	7	105	22	56	*	28.3	50	*	30	140	1.4	0.5
-120-M 67	1	12	26	7	120	67	26	*	33	42	*	30	155	1.4	0.8
-125-M 42	1	12	26	7	125	42	56	*	30.4	42	*	30	160	1.5	0.7
-135-M 22	1	12	26	7	135	22	86	*	28.3	50	*	30	170	1.8	0.6
-150-M 67	1	12	26	7	150	67	56	*	33	42	*	30	185	1.6	1.1
-155-M 42	2	12	26	7	155	42	28	58	30.4	42	53	30	190	2	0.8
-180-M 67	2	12	26	7	180	67	28	58	33	42	53	30	215	2.1	1.1

规格说明:

BT40 - SLSB - 12 - 95 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT40-SL 热缩刀柄（3°一体型）

BT40-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



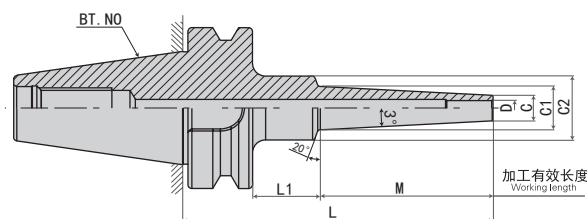


FIG.2

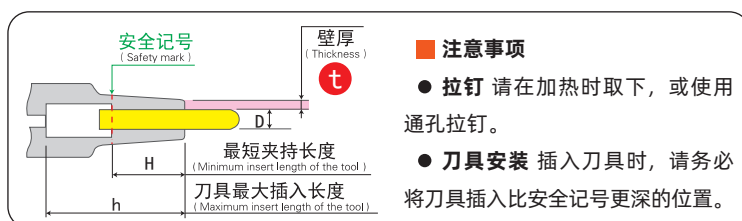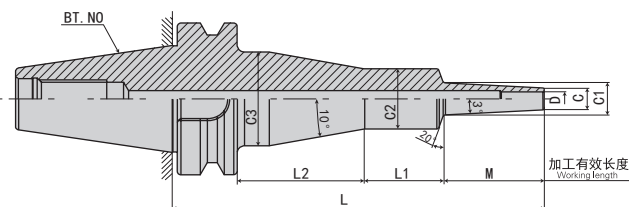

■ 注意事项

- 拉钉 请在加热时取下，或使用通孔拉钉。
- 刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT40-SLFB12- 75-M 22	1	12	26	7	75	22	26	*	28.3	42	*	30	110	1.2	0.4
- 95-M 42	1	12	26	7	95	42	26	*	30.4	42	*	30	130	1.2	0.6
-105-M 22	1	12	26	7	105	22	56	*	28.3	42	*	30	140	1.4	0.5
-120-M 67	1	12	26	7	120	67	26	*	33	42	*	30	155	1.4	0.8
-125-M 42	1	12	26	7	125	42	56	*	30.4	42	*	30	160	1.5	0.7
-135-M 22	2	12	26	7	135	22	28	58	28.3	42	53	30	170	1.9	0.6
-150-M 67	1	12	26	7	150	67	56	*	33	42	*	30	185	1.6	1.1
-155-M 42	1	12	26	7	155	42	86	*	30.4	50	*	30	190	2	0.8
-180-M 67	2	12	26	7	180	67	28	58	33	42	53	30	215	2.1	1.1
-SLSB16- 95-M 42	1	16	24	4	95	42	26	*	28.4	42	*	32	105	1.2	0.7
-120-M 67	1	16	24	4	120	67	26	*	31	42	*	32	130	1.3	1.1
-125-M 42	1	16	24	4	125	42	56	*	28.4	42	*	32	135	1.4	0.9
-150-M 67	1	16	24	4	150	67	56	*	31	42	*	32	160	1.5	1.4
-M 97	1	16	24	4	150	97	26	*	34.2	42	*	32	160	1.4	1.7
-155-M 42	2	16	24	4	155	42	28	58	28.4	42	53	32	165	1.9	1
-180-M 67	2	16	24	4	180	67	28	58	31	42	53	32	190	2	1.5
-M 97	1	16	24	4	180	97	56	*	34.2	42	*	32	190	1.7	2.1
-M127	1	16	24	4	180	127	26	*	37.3	53	*	32	190	1.7	2.1
-210-M 97	1	16	24	4	210	97	86	*	34.2	50	*	32	220	2.1	2.1
-M127	1	16	24	4	210	127	56	*	37.3	50	*	32	220	2	2.5
-M157	1	16	24	4	210	157	26	*	40.5	53	*	32	220	1.9	2.7
-240-M127	1	16	24	4	240	127	86	*	37.3	53	*	32	250	2.5	2.6
-M157	1	16	24	4	240	157	56	*	40.5	50	*	32	250	2.2	3.1
-270-M157	1	16	24	4	270	157	86	*	40.5	53	*	32	280	2.7	3.5

规格说明:

BT40 - SLFB - 12 - 75 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT40-SL 热缩刀柄（3°一体型）

BT40-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



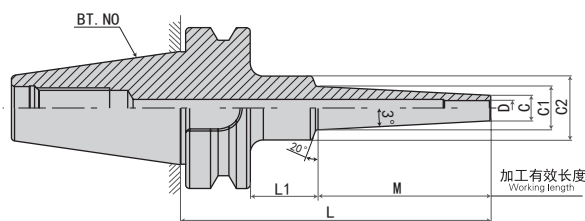


FIG.2

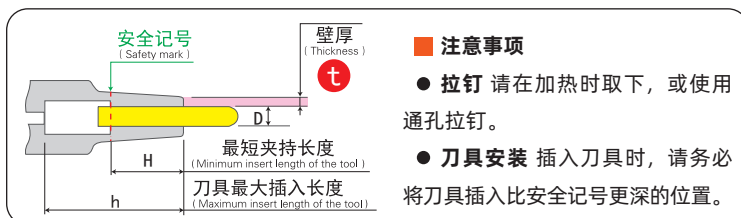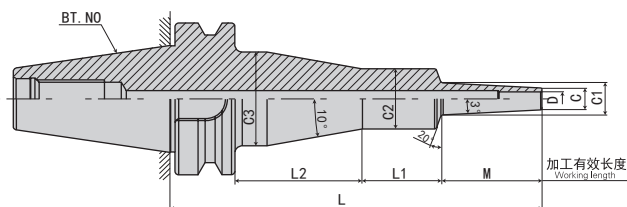

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT40-SLRB16- 75-M 22	1	16	32	8	75	22	26	*	34.3	42	*	32	85	1.2	0.3
- 95-M 42	1	16	32	8	95	42	26	*	36.4	42	*	32	105	1.3	0.5
-105-M 22	1	16	32	8	105	22	56	*	34.3	42	*	32	115	1.4	0.5
-120-M 67	1	16	32	8	120	67	26	*	39	42	*	32	130	1.5	0.7
-125-M 42	1	16	32	8	125	42	56	*	36.4	42	*	32	135	1.6	0.7
-135-M 22	2	16	32	8	135	22	28	58	34.3	42	53	32	145	2	0.5
-150-M 67	1	16	32	8	150	67	56	*	39	42	*	32	160	1.7	0.9
-155-M 42	2	16	32	8	155	42	28	58	36.4	42	53	32	165	2.1	0.7
-180-M 67	2	16	32	8	180	67	28	58	39	42	53	32	190	2.3	1
-SLFB16- 75-M 22	1	16	32	8	75	22	26	*	34.3	42	*	32	85	1.2	0.3
- 95-M 42	1	16	32	8	95	42	26	*	36.4	42	*	32	105	1.3	0.5
-105-M 22	1	16	32	8	105	22	56	*	34.3	42	*	32	115	1.4	0.5
-120-M 67	1	16	32	8	120	67	26	*	39	42	*	32	130	1.5	0.7
-125-M 42	1	16	32	8	125	42	56	*	36.4	42	*	32	135	1.6	0.7
-135-M 22	1	16	32	8	135	22	86	*	34.3	50	*	32	145	1.9	0.5
-150-M 67	1	16	32	8	150	67	56	*	39	42	*	32	160	1.7	0.9
-155-M 42	1	16	32	8	155	42	86	*	36.4	50	*	32	165	2	0.7
-180-M 67	2	16	32	8	180	67	28	58	39	42	53	32	190	2.3	1
-SLSB20- 95-M 42	1	20	29	4.5	95	42	26	*	33.4	42	*	40	105	1.2	0.6
-120-M 67	1	20	29	4.5	120	67	26	*	36	42	*	40	130	1.3	0.9
-125-M 42	1	20	29	4.5	125	42	56	*	33.4	42	*	40	135	1.5	0.8
-150-M 67	1	20	29	4.5	150	67	56	*	36	42	*	40	160	1.6	1.2
-M 97	1	20	29	4.5	150	97	26	*	39.2	53	*	40	160	1.6	1.2
-155-M 42	2	20	29	4.5	155	42	28	58	33.4	42	53	40	165	2	0.9



规格说明:

BT40 - SLRB - 16 - 75 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT40-SL 热缩刀柄（3°一体型）

BT40-SL SHRINK FIT HOLDER(3° MONO)

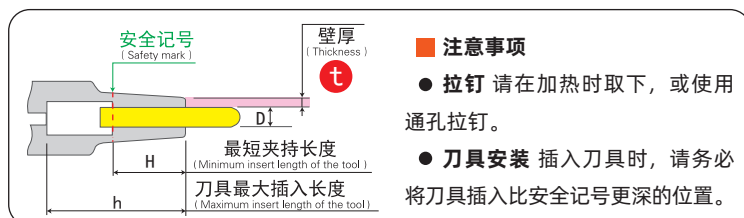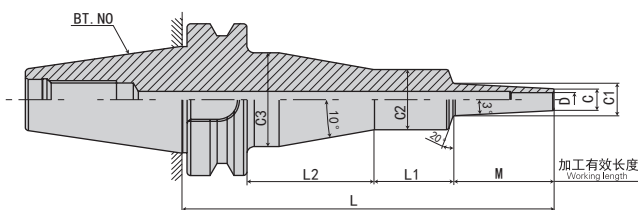

型号 Model	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT40-SLSB20-180-M 67	20	29	4.5	180	67	86	*	36	50	*	40	190	2	1.2
-M 97	20	29	4.5	180	97	56	*	39.2	50	*	40	190	1.9	1.4
-M127	20	29	4.5	180	127	26	*	42.3	53	*	40	190	1.8	1.6
-210-M 97	20	29	4.5	210	97	86	*	39.2	53	*	40	220	2.4	1.6
-M127	20	29	4.5	210	127	56	*	42.3	50	*	40	220	2.1	1.9
-M157	20	29	4.5	210	157	26	*	45.5	50	*	40	220	2	2.1
-240-M127	20	29	4.5	240	127	86	*	42.3	50	*	40	250	2.4	2.3
-M157	20	29	4.5	240	157	56	*	45.5	50	*	40	250	2.4	2.4
-270-M157	20	29	4.5	270	157	86	*	45.5	50	*	40	280	2.7	2.9
-SLRB20- 95-M 42	20	38	9	95	42	26	*	42.4	53	*	40	105	1.5	0.4
-120-M 67	20	38	9	120	67	26	*	45	53	*	40	130	1.7	0.5
-125-M 42	20	38	9	125	42	56	*	42.4	53	*	40	135	1.9	0.5
-150-M 67	20	38	9	150	67	56	*	45	50	*	40	160	2	0.7
-155-M 42	20	38	9	155	42	86	*	42.4	53	*	40	165	2.2	0.6
-180-M 67	20	38	9	180	67	86	*	45	50	*	40	190	2.3	0.9
-SLFB20- 95-M 42	20	38	9	95	42	26	*	42.4	53	*	40	105	1.5	0.4
-120-M 67	20	38	9	120	67	26	*	45	53	*	40	130	1.7	0.5
-125-M 42	20	38	9	125	42	56	*	42.4	53	*	40	135	1.9	0.5
-150-M 67	20	38	9	150	67	56	*	45	50	*	40	160	2	0.7
-155-M 42	20	38	9	155	42	86	*	42.4	50	*	40	165	2.1	0.7
-180-M 67	20	38	9	180	67	86	*	45	50	*	40	190	2.3	0.9
-SLRB25- 95-M 42	25	45	10	95	42	26	*	49.4	53	*	45	105	1.5	0.3
-125-M 42	25	45	10	125	42	56	*	49.4	53	*	45	135	1.9	0.4
-155-M 42	25	45	10	155	42	86	*	49.4	53	*	45	165	2.3	0.6
-SLFB25- 95-M 42	25	45	10	95	42	26	*	49.4	53	*	45	105	1.5	0.3
-125-M 42	25	45	10	125	42	56	*	49.4	53	*	45	135	1.9	0.4
-155-M 42	25	45	10	155	42	86	*	49.4	53	*	45	165	2.3	0.6
-SLRB32- 95-M 42	32	54	11	95	42	26	*	58.4	63	*	50	87	1.8	0.3

规格说明:

BT40 - SLSB - 20 - 180 - M67

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT40-SL 热缩刀柄（CV 曲线型）

BT40-SL SHRINK FIT HOLDER(CV CURVE)



FIG.1




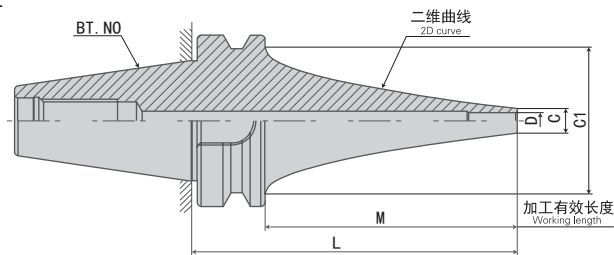


FIG.2

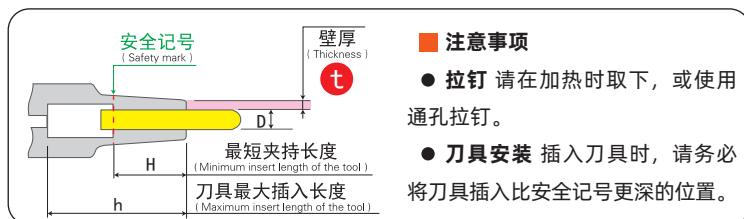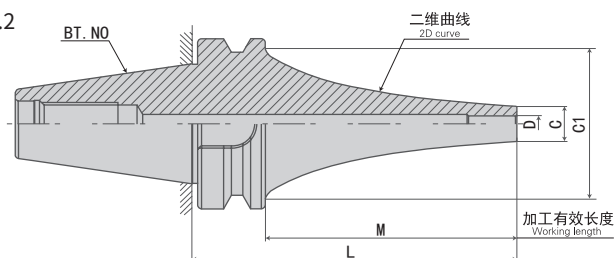

型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
BT40-SLSA4- 90CV	1	4	7	1.5	90	63	53	12	125	1.2	1.8
-120CV	1	4	7	1.5	120	93	53	12	155	1.3	2.7
-150CV	1	4	7	1.5	150	123	53	12	185	1.5	4
-180CV	1	4	7	1.5	180	153	53	12	215	1.5	6.6
-210CV	1	4	7	1.5	210	183	53	12	245	1.6	11.6
-240CV	1	4	7	1.5	240	213	53	12	275	1.8	14
-SLRA4-120CV	2	4	10	3	120	93	53	12	155	1.3	1.9
-150CV	2	4	10	3	150	123	53	12	185	1.4	2.9
-180CV	2	4	10	3	180	153	53	12	215	1.5	4.2
-210CV	2	4	10	3	210	183	53	12	245	1.7	5.7
-SLSA6- 90CV	1	6	9	1.5	90	63	53	18	125	1.2	1.6
-120CV	1	6	9	1.5	120	93	53	18	155	1.3	2.3
-150CV	1	6	9	1.5	150	123	53	18	185	1.5	3.6
-180CV	1	6	9	1.5	180	153	53	18	215	1.5	5.7
-210CV	1	6	9	1.5	210	183	53	18	245	1.7	7.3
-240CV	1	6	9	1.5	240	213	53	18	275	1.8	12
-SLRA6- 90CV	2	6	13	3.5	90	63	53	18	125	1.2	1.2
-120CV	2	6	13	3.5	120	93	53	18	155	1.3	1.7
-150CV	2	6	13	3.5	150	123	53	18	185	1.5	2.1
-180CV	2	6	13	3.5	180	153	53	18	215	1.7	2.8
-210CV	2	6	13	3.5	210	183	53	18	245	1.7	4.8

规格说明:

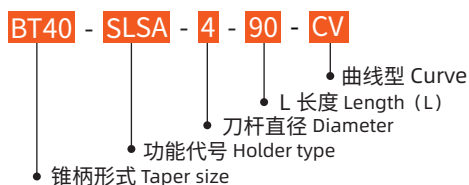

·BT40-SL 热缩刀柄（CV 曲线型）

BT40-SL SHRINK FIT HOLDER(CV CURVE)



FIG.1



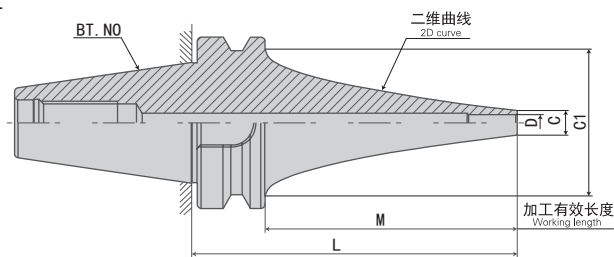


FIG.2

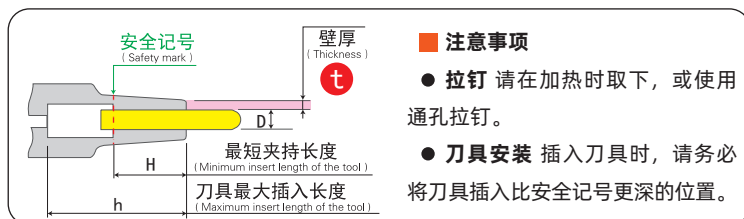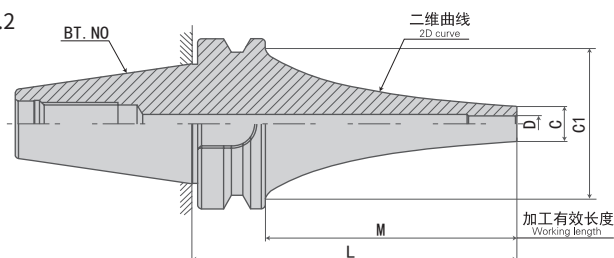

型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
BT40-SLFA6- 90CV	2	6	13	3.5	90	63	53	18	125	1.2	1.2
 -120CV	2	6	13	3.5	120	93	53	18	155	1.3	1.7
-150CV	2	6	13	3.5	150	123	53	18	185	1.5	2.1
-180CV	2	6	13	3.5	180	153	53	18	215	1.7	2.8
-210CV	2	6	13	3.5	210	183	53	18	245	1.7	4.8
-SLSA8- 90CV	1	8	11	1.5	90	63	53	24	125	1.2	1.4
-120CV	1	8	11	1.5	120	93	53	24	155	1.3	2
-150CV	1	8	11	1.5	150	123	53	24	185	1.5	2.7
-180CV	1	8	11	1.5	180	153	53	24	215	1.6	5
-210CV	1	8	11	1.5	210	183	53	24	245	1.7	6.6
-240CV	1	8	11	1.5	240	213	53	24	275	1.9	8.3
-SLRA8- 90CV	2	8	16	4	90	63	53	24	125	1.2	0.7
-120CV	2	8	16	4	120	93	53	24	155	1.4	1.2
-150CV	2	8	16	4	150	123	53	24	185	1.6	1.8
-180CV	2	8	16	4	180	153	53	24	215	1.7	2.6
-210CV	2	8	16	4	210	183	53	24	245	1.8	3.5
-SLFA8- 90CV	2	8	16	4	90	63	53	24	125	1.2	0.7
 -120CV	2	8	16	4	120	93	53	24	155	1.4	1.2
-150CV	2	8	16	4	150	123	53	24	185	1.6	1.8
-180CV	2	8	16	4	180	153	53	24	215	1.7	2.6
-210CV	2	8	16	4	210	183	53	24	245	1.8	3.5

规格说明:

BT40 - SLFA - 6 - 90 - CV

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 曲线型 Curve

·BT40-SL 热缩刀柄 (CV 曲线型)

BT40-SL SHRINK FIT HOLDER(CV CURVE)



FIG.1



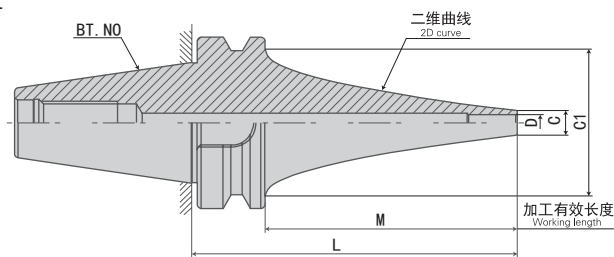


FIG.2

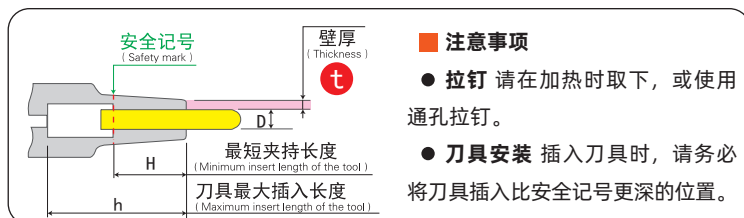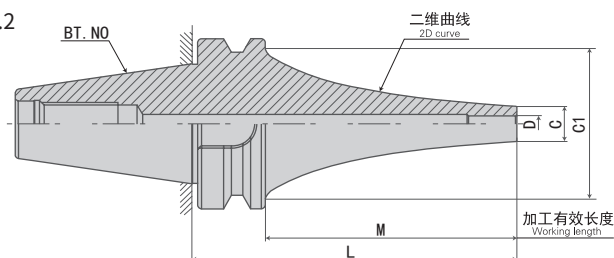

型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
BT40-SLSA10- 90CV	1	10	13	1.5	90	63	53	30	125	1.2	1.8
-120CV	1	10	13	1.5	120	93	53	30	155	1.5	1.3
-150CV	1	10	13	1.5	150	123	53	30	185	1.6	2.2
-180CV	1	10	13	1.5	180	153	53	30	215	1.7	3.4
-210CV	1	10	13	1.5	210	183	53	30	245	1.7	6
-240CV	1	10	13	1.5	240	213	53	30	275	2	5.8
-SLRA10- 90CV	2	10	19	4.5	90	63	53	30	125	1.3	0.7
-120CV	2	10	19	4.5	120	93	53	30	155	1.4	0.9
-150CV	2	10	19	4.5	150	123	53	30	185	1.6	1.4
-180CV	2	10	19	4.5	180	153	53	30	215	1.8	2
-210CV	2	10	19	4.5	210	183	53	30	245	1.8	3.1
-SLFA10- 90CV	2	10	19	4.5	90	63	53	30	125	1.3	0.7
-120CV	2	10	19	4.5	120	93	53	30	155	1.4	0.9
-150CV	2	10	19	4.5	150	123	53	30	185	1.6	1.4
-180CV	2	10	19	4.5	180	153	53	30	215	1.8	2
-210CV	2	10	19	4.5	210	183	53	30	245	1.8	3.1
-SLSA12- 90CV	1	12	15	1.5	90	63	53	30	125	1.3	1.5
-120CV	1	12	15	1.5	120	93	53	30	155	1.5	1.2
-150CV	1	12	15	1.5	150	123	53	30	185	1.5	2.4
-180CV	1	12	15	1.5	180	153	53	30	215	1.7	3.3
-210CV	1	12	15	1.5	210	183	53	30	245	1.9	4.6
-240CV	1	12	15	1.5	240	213	53	30	275	2	5.5



规格说明:

BT40 - SLSA - 10 - 90 - CV

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 曲线型 Curve

·BT40-SL 热缩刀柄（CV 曲线型）

BT40-SL SHRINK FIT HOLDER(CV CURVE)

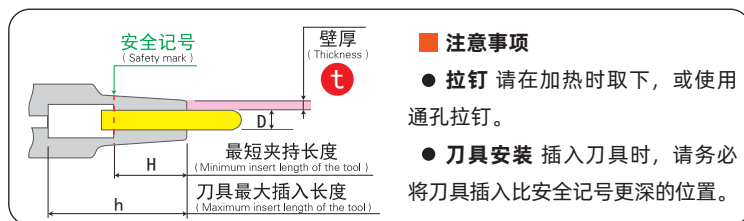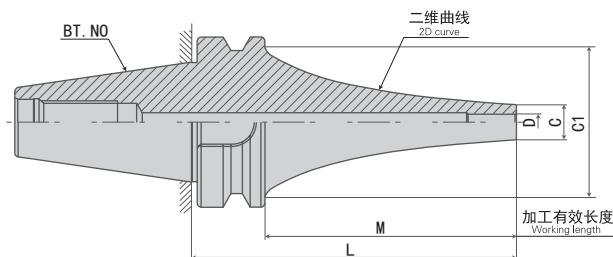

型号 Model	D	C	t	L	M	C1	H	h	重量 KGS	S
BT40-SLRA12- 90CV	12	22	5	90	63	53	30	125	1.3	0.6
-120CV	12	22	5	120	93	53	30	155	1.6	0.7
-150CV	12	22	5	150	123	53	30	185	1.7	1.1
-180CV	12	22	5	180	153	53	30	215	1.7	1.9
-210CV	12	22	5	210	183	53	30	245	1.8	2.8
-SLFA12- 90CV	12	22	5	90	63	53	30	125	1.3	0.6
-120CV	12	22	5	120	93	53	30	155	1.6	0.7
-150CV	12	22	5	150	123	53	30	185	1.7	1.1
-180CV	12	22	5	180	153	53	30	215	1.7	1.9
-210CV	12	22	5	210	183	53	30	245	1.8	2.8
-SLSB16- 90CV	16	21	2.5	90	63	53	32	100	1.3	0.6
-120CV	16	21	2.5	120	93	53	32	130	1.5	0.8
-150CV	16	21	2.5	150	123	53	32	160	1.6	1.5
-180CV	16	21	2.5	180	153	53	32	190	1.9	1.9
-210CV	16	21	2.5	210	183	53	32	220	2	3
-240CV	16	21	2.5	240	213	53	32	250	2.2	3.7
-SLSB20- 90CV	20	26	3	90	63	50.5	40	100	1.3	0.5
-120CV	20	26	3	120	93	53	40	130	1.5	0.8
-150CV	20	26	3	150	123	53	40	160	1.6	1.3
-180CV	20	26	3	180	153	53	40	190	1.9	1.8
-210CV	20	26	3	210	183	53	40	220	2.1	2.3
-240CV	20	26	3	240	213	53	40	250	2.4	3

规格说明:

BT40 - SLSA - 12 - 90 - CV

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 曲线型 Curve

·BT50-SL 热缩刀柄（3°一体型）

BT50-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



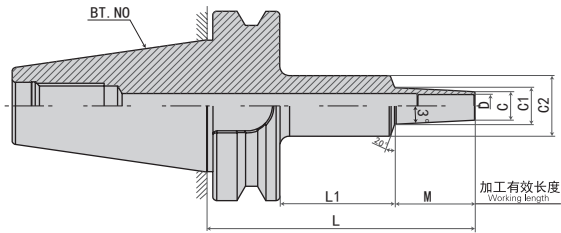


FIG.2

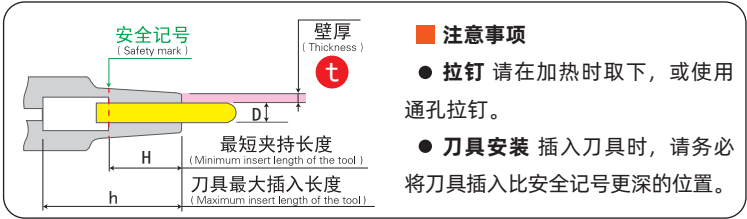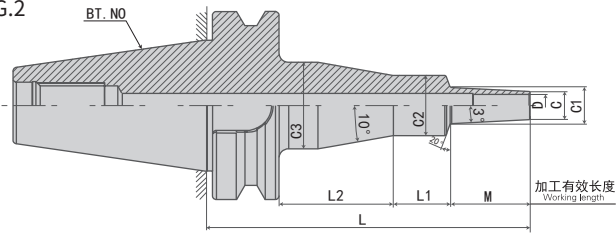

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT50-SLSA3-110-M 42	1	3	6	1.5	110	42	30	*	10.4	25	*	9	165	3.6	9.1
-135-M 67	1	3	6	1.5	135	67	30	*	13	25	*	9	190	3.6	14.7
-140-M 42	1	3	6	1.5	140	42	60	*	10.4	25	*	9	195	3.7	9.8
-165-M 67	1	3	6	1.5	165	67	60	*	13	25	*	9	220	3.7	15.9
-M 97	1	3	6	1.5	165	97	30	*	16.2	26	*	9	220	3.7	20.8
-170-M 42	2	3	6	1.5	170	42	33	57	10.4	26	40	9	225	4.1	9.9
-195-M 67	2	3	6	1.5	195	67	33	57	13	26	40	9	250	4.1	15.8
-M 97	1	3	6	1.5	195	97	60	*	16.2	26	*	9	250	3.8	22.3
-225-M 97	2	3	6	1.5	225	97	33	57	16.2	26	40	9	280	4.1	22.1
-SLRA3 - 90-M 22	1	3	7.5	2.25	90	22	30	*	9.8	25	*	9	145	3.6	2.8
-110-M 42	1	3	7.5	2.25	110	42	30	*	11.9	26	*	9	165	3.7	5.4
-120-M 22	1	3	7.5	2.25	120	22	60	*	9.8	25	*	9	175	3.7	3.2
-135-M 67	1	3	7.5	2.25	135	67	30	*	14.5	26	*	9	190	3.7	9
-140-M 42	1	3	7.5	2.25	140	42	60	*	11.9	26	*	9	195	3.8	6
-150-M 22	2	3	7.5	2.25	150	22	33	57	9.8	25	39	9	205	4	3.2
-165-M 67	1	3	7.5	2.25	165	67	60	*	14.5	25	*	9	220	3.8	10
-M 97	1	3	7.5	2.25	165	97	30	*	17.7	26	*	9	220	3.7	13
-170-M 42	2	3	7.5	2.25	170	42	33	57	11.9	26	40	9	225	4.1	6
-195-M 67	2	3	7.5	2.25	195	67	33	57	14.5	26	40	9	250	4.1	9.8
-M 97	1	3	7.5	2.25	195	97	60	*	17.7	26	*	9	250	3.8	14.5
-M127	1	3	7.5	2.25	195	127	30	*	20.8	32	*	9	250	3.8	15.7
-225-M 97	2	3	7.5	2.25	225	97	33	57	17.7	25	39	9	280	4.1	14.4
-M127	1	3	7.5	2.25	225	127	60	*	20.8	36	*	9	280	4.1	16.3
-255-M127	2	3	7.5	2.25	255	127	30	60	20.8	32	46	9	310	4.4	16.5

规格说明:

BT50 - SLSA - 3 - 110 - M42

- 加工有效长度 Working length
- L 长度 Length (L)
- 刀杆直径 Diameter
- 功能代号 Holder type
- 锥柄形式 Taper size

·BT50-SL 热缩刀柄（3°一体型）

BT50-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



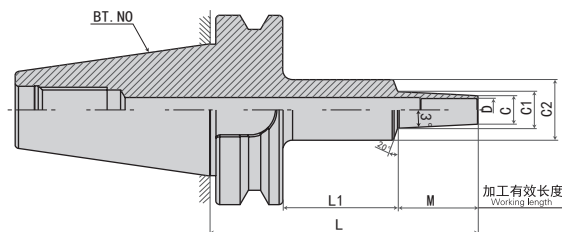


FIG.2

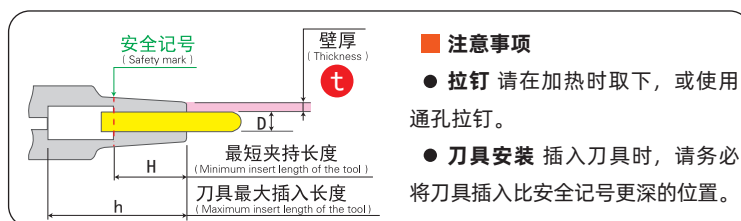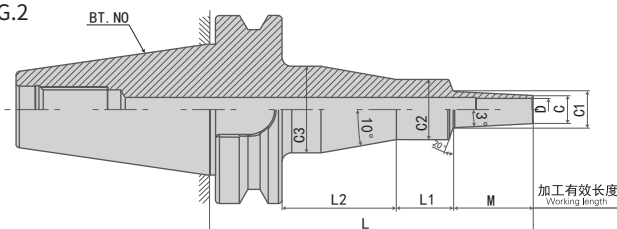

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT50-SLFB3- 90-M 22	1	3	9.5	3.25	90	22	30	*	11.8	26	*	9	145	3.6	1.9
-110-M 42	1	3	9.5	3.25	110	42	30	*	13.9	26	*	9	165	3.7	3.3
-120-M 22	1	3	9.5	3.25	120	22	60	*	11.8	25	*	9	175	3.7	2.4
-135-M 67	1	3	9.5	3.25	135	67	30	*	16.5	26	*	9	190	3.7	5.4
-140-M 42	1	3	9.5	3.25	140	42	60	*	13.9	25	*	9	195	3.7	4
-150-M 22	2	3	9.5	3.25	150	22	33	57	11.8	25	39	9	205	4	2.3
-165-M 67	1	3	9.5	3.25	165	67	60	*	16.5	26	*	9	220	3.8	6.4
-170-M 42	2	3	9.5	3.25	170	42	33	57	13.9	25	39	9	225	4	3.9
-195-M 67	2	3	9.5	3.25	195	67	33	57	16.5	25	39	9	250	4.1	6.4
-SLSA4-110-M 42	1	4	7	1.5	110	42	30	*	11.4	25	*	12	165	3.6	7.2
-135-M 67	1	4	7	1.5	135	67	30	*	14	25	*	12	190	3.6	11.8
-140-M 42	1	4	7	1.5	140	42	60	*	11.4	25	*	12	195	3.7	8
-165-M 67	1	4	7	1.5	165	67	60	*	14	25	*	12	220	3.7	13
-M 97	1	4	7	1.5	165	97	30	*	17.2	25	*	12	220	3.7	16.7
-170-M 42	2	4	7	1.5	170	42	33	57	11.4	25	39	12	225	4	7.9
-195-M 67	2	4	7	1.5	195	67	33	57	14	25	39	12	250	4	12.8
-M 97	1	4	7	1.5	195	97	60	*	17.2	26	*	12	250	3.8	18.4
-225-M 97	2	4	7	1.5	225	97	33	57	17.2	25	39	12	280	4.1	18.2
-SLRA4- 90-M 22	1	4	10	3	90	22	30	*	12.3	25	*	12	145	3.6	1.7
-110-M 42	1	4	10	3	110	42	30	*	14.4	25	*	12	165	3.6	3.1
-120-M 22	1	4	10	3	120	22	60	*	12.3	25	*	12	175	3.7	2.2
-135-M 67	1	4	10	3	135	67	30	*	17	25	*	12	190	3.7	5.2
-140-M 42	1	4	10	3	140	42	60	*	14.4	25	*	12	195	3.7	3.9
-150-M 22	2	4	10	3	150	22	33	57	12.3	25	39	12	205	4	2.2

规格说明:

BT50 - SLFB - 3 - 90 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT50-SL 热缩刀柄 (3°一体型)

BT50-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



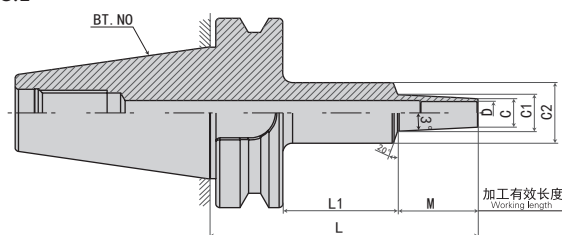


FIG.2

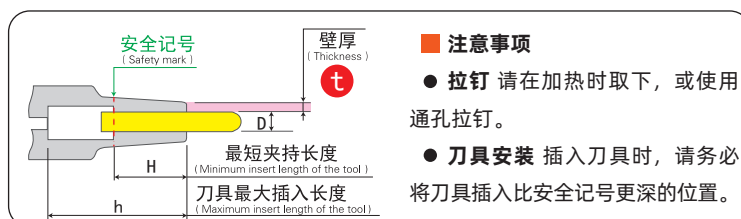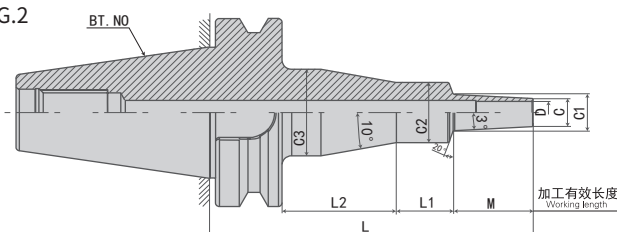

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT50-SLRA4-165-M 67	1	4	10	3	165	67	60	*	17	25	*	12	220	3.8	6.4
-M 97	1	4	10	3	165	97	30	*	20.2	25	*	12	220	3.7	7.9
-170-M 42	2	4	10	3	170	42	33	57	14.4	25	39	12	225	4	3.8
-195-M 67	2	4	10	3	195	67	33	57	17	25	39	12	250	4.1	6.2
-M 97	1	4	10	3	195	97	60	*	20.2	25	*	12	250	3.8	9.7
-M127	1	4	10	3	195	127	30	*	23.3	32	*	12	250	3.8	9.4
-225-M 97	2	4	10	3	225	97	30	60	20.2	25	39	12	280	4.1	9.4
-M127	1	4	10	3	225	127	60	*	23.3	32	*	12	280	4	10.4
-255-M127	2	4	10	3	255	127	30	60	23.3	32	46	12	310	4.4	10.3
-SLFB4- 90-M 22	1	4	12	4	90	22	30	*	14.3	25	*	12	145	3.6	1.4
-110-M 42	1	4	12	4	110	42	30	*	16.4	25	*	12	165	3.7	2.2
-120-M 22	1	4	12	4	120	22	60	*	14.3	25	*	12	175	3.7	1.9
-135-M 67	1	4	12	4	135	67	30	*	19	26	*	12	190	3.7	3.6
-140-M 42	1	4	12	4	140	42	60	*	16.4	26	*	12	195	3.8	2.9
-150-M 22	2	4	12	4	150	22	33	57	14.3	25	39	12	205	4	1.8
-165-M 67	1	4	12	4	165	67	60	*	19	25	*	12	220	3.8	4.8
-170-M 42	2	4	12	4	170	42	33	57	16.4	26	40	12	225	4.1	2.8
-195-M 67	2	4	12	4	195	67	33	57	19	26	40	12	250	4.2	4.5
-SLSA6-110-M 42	1	6	9	1.5	110	42	30	*	13.4	25	*	18	165	3.6	4.8
-135-M 67	1	6	9	1.5	135	67	30	*	16	25	*	18	190	3.7	8.1
-140-M 42	1	6	9	1.5	140	42	60	*	13.4	25	*	18	195	3.7	5.7
-165-M 67	1	6	9	1.5	165	67	60	*	16	25	*	18	220	3.8	9.4
-M 97	1	6	9	1.5	165	97	30	*	19.2	32	*	18	220	3.7	11
-170-M 42	2	6	9	1.5	170	42	33	57	13.4	26	40	18	225	4.1	5.5
-195-M 67	2	6	9	1.5	195	67	33	57	16	25	39	18	250	4	9.2
-M 97	1	6	9	1.5	195	97	60	*	19.2	32	*	18	250	3.9	11.7
-225-M 97	2	6	9	1.5	225	97	30	60	19.2	32	46	18	280	4.3	11.7

规格说明:

BT50 - SLRA - 4 - 165 - M67

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT50-SL 热缩刀柄（3°一体型）

BT50-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



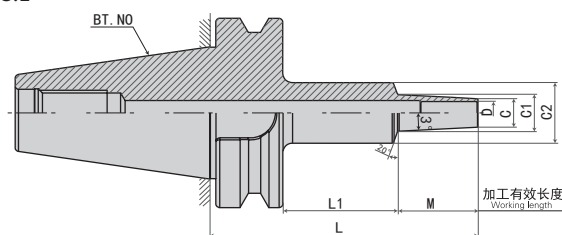


FIG.2

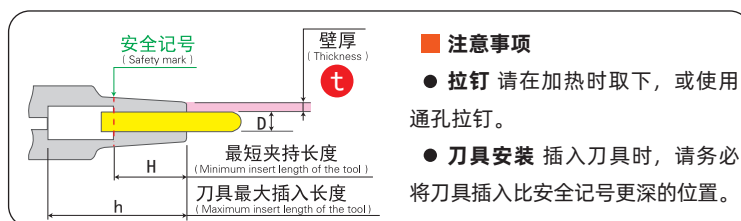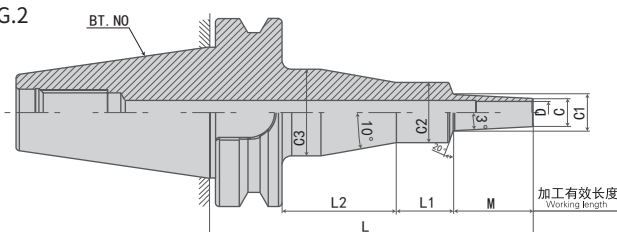

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT50-SLSB6-110-M 42	1	6	10	2	110	42	30	*	14.4	25	*	18	165	3.6	3.7
-135-M 67	1	6	10	2	135	67	30	*	17	25	*	18	190	3.7	6.2
-140-M 42	1	6	10	2	140	42	60	*	14.4	25	*	18	195	3.7	4.6
-165-M 67	1	6	10	2	165	67	60	*	17	25	*	18	220	3.8	7.6
-M 97	1	6	10	2	165	97	30	*	20.2	32	*	18	220	3.8	8.5
-170-M 42	2	6	10	2	170	42	33	57	14.4	25	39	18	225	4	4.4
-195-M 67	2	6	10	2	195	67	33	57	17	25	39	18	250	4.1	7.3
-M 97	1	6	10	2	195	97	60	*	20.2	32	*	18	250	3.9	9.2
-M127	1	6	10	2	195	127	30	*	23.3	32	*	18	250	3.8	11.1
-225-M 97	2	6	10	2	225	97	30	60	20.2	32	46	18	280	4.3	9.2
-M127	1	6	10	2	225	127	60	*	23.3	32	*	18	280	4	12.1
-M157	1	6	10	2	225	157	30	*	26.5	32	*	18	280	3.9	13.3
-255-M127	2	6	10	2	255	127	30	60	23.3	32	46	18	310	4.4	12
-M157	1	6	10	2	255	157	60	*	26.5	32	*	18	310	4.1	14.7
-285-M157	2	6	10	2	285	157	30	60	26.5	32	46	18	340	4.5	14.5
-SLRB6- 90-M 22	1	6	14	4	90	22	30	*	16.3	32	*	18	145	3.7	1
-110-M 42	1	6	14	4	110	42	30	*	18.4	32	*	18	165	3.7	1.6
-120-M 22	1	6	14	4	120	22	60	*	16.3	32	*	18	175	3.8	1.2
-135-M 67	1	6	14	4	135	67	30	*	21	32	*	18	190	3.8	2.6
-140-M 42	1	6	14	4	140	42	60	*	18.4	32	*	18	195	3.9	1.9
-150-M 22	2	6	14	4	150	22	30	60	16.3	32	46	18	205	4.2	1.2
-165-M 67	1	6	14	4	165	67	60	*	21	32	*	18	220	3.9	3.1
-170-M 42	2	6	14	4	170	42	30	60	18.4	32	46	18	225	4.3	1.9
-195-M 67	2	6	14	4	195	67	30	60	21	32	46	18	250	4.3	3

规格说明:

BT50 - SLSB - 6 - 110 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT50-SL 热缩刀柄（3°一体型）

BT50-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



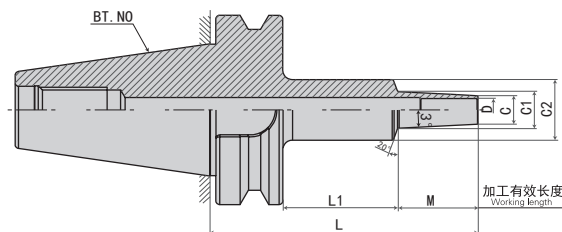


FIG.2

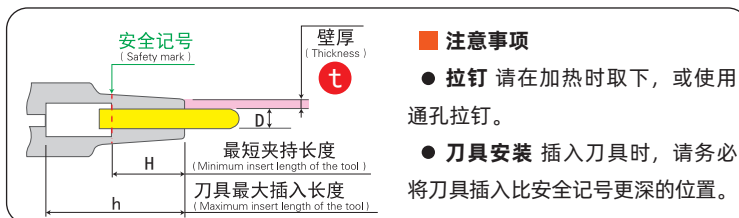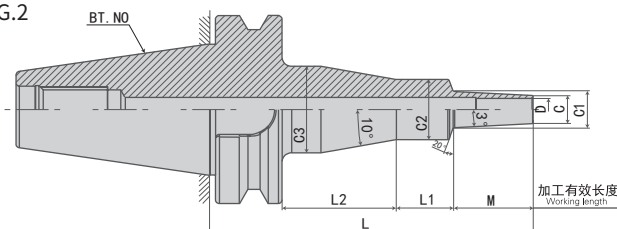

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT50-SLFB6- 90-M 22	1	6	14	4	90	22	30	*	16.3	32	*	18	145	3.7	1
-110-M 42	1	6	14	4	110	42	30	*	18.4	32	*	18	165	3.7	1.6
-120-M 22	1	6	14	4	120	22	60	*	16.3	32	*	18	175	3.8	1.2
-135-M 67	1	6	14	4	135	67	30	*	21	32	*	18	190	3.8	2.6
-140-M 42	1	6	14	4	140	42	60	*	18.4	32	*	18	195	3.9	1.9
-150-M 22	2	6	14	4	150	22	30	60	16.3	32	46	18	205	4.2	1.2
-165-M 67	1	6	14	4	165	67	60	*	21	32	*	18	220	3.9	3.1
-170-M 42	2	6	14	4	170	42	30	60	18.4	32	46	18	225	4.3	1.9
-195-M 67	2	6	14	4	195	67	30	60	21	32	46	18	250	4.3	3
-SLSA8-110-M 42	1	8	11	1.5	110	42	30	*	15.4	25	*	24	165	3.6	3.5
-135-M 67	1	8	11	1.5	135	67	30	*	18	32	*	24	190	3.7	5.4
-140-M 42	1	8	11	1.5	140	42	60	*	15.4	25	*	24	195	3.7	4.4
-165-M 67	1	8	11	1.5	165	67	60	*	18	32	*	24	220	3.9	5.9
-M 97	1	8	11	1.5	165	97	30	*	21.2	32	*	24	220	3.8	7.9
-170-M 42	2	8	11	1.5	170	42	33	57	15.4	25	39	24	225	4	4.3
-195-M 67	2	8	11	1.5	195	67	30	60	18	32	46	24	250	4.3	5.9
-M 97	1	8	11	1.5	195	97	60	*	21.2	32	*	24	250	3.9	8.7
-225-M 97	2	8	11	1.5	225	97	28	62	21.2	36	50	24	280	4.5	8.3
-SLSB8-110-M 42	1	8	13	2.5	110	42	30	*	17.4	32	*	24	165	3.7	2.1
-135-M 67	1	8	13	2.5	135	67	30	*	20	32	*	24	190	3.7	3.5
-140-M 42	1	8	13	2.5	140	42	60	*	17.4	32	*	24	195	3.8	2.4
-165-M 67	1	8	13	2.5	165	67	60	*	20	32	*	24	220	3.9	4
-M 97	1	8	13	2.5	165	97	30	*	23.2	32	*	24	220	3.8	5.3
-170-M 42	2	8	13	2.5	170	42	30	60	17.4	32	46	24	225	4.3	2.4

规格说明:

BT50 - SLFB - 6 - 90 - M22

- 锥柄形式 Shank size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT50-SL 热缩刀柄（3°一体型）

BT50-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



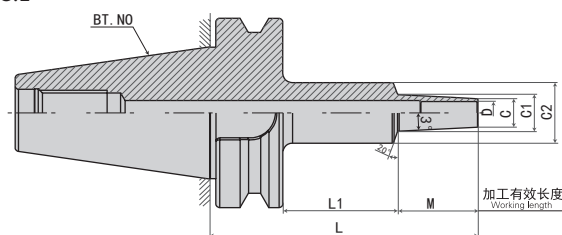


FIG.2

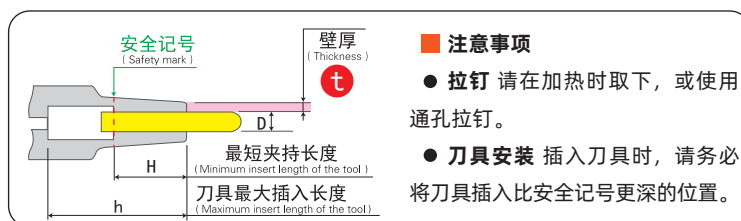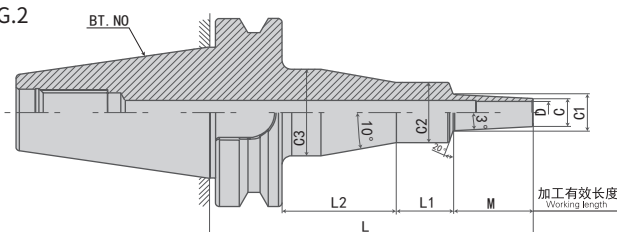

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT50-SLSB8-195-M 67	2	8	13	2.5	195	67	30	60	20	32	46	24	250	4.3	4
-M 97	1	8	13	2.5	195	97	60	*	23.2	32	*	24	250	4	6.1
-M127	1	8	13	2.5	195	127	30	*	26.3	32	*	24	250	3.9	7.1
-225-M 97	2	8	13	2.5	225	97	30	60	23.2	32	46	24	280	4.4	6
-M127	1	8	13	2.5	225	127	60	*	26.3	32	*	24	280	4	8.2
-M157	1	8	13	2.5	225	157	30	*	29.5	42	*	24	280	4	8
-255-M127	2	8	13	2.5	255	127	30	60	26.3	32	46	24	310	4.5	8.1
-M157	1	8	13	2.5	255	157	60	*	29.5	42	*	24	310	4.3	8.5
-285-M157	2	8	13	2.5	285	157	28	60	29.5	42	56	24	340	4.9	8.5
-SLRB8- 90-M 22	1	8	18	5	90	22	30	*	20.3	32	*	24	145	3.7	0.7
-110-M 42	1	8	18	5	110	42	30	*	22.4	32	*	24	165	3.7	1.1
-120-M 22	1	8	18	5	120	22	60	*	20.3	32	*	24	175	3.8	0.9
-135-M 67	1	8	18	5	135	67	30	*	25	32	*	24	190	3.8	1.7
-140-M 42	1	8	18	5	140	42	60	*	22.4	32	*	24	195	3.9	1.4
-150-M 22	2	8	18	5	150	22	30	60	20.3	32	46	24	205	4.3	0.9
-165-M 67	1	8	18	5	165	67	60	*	25	32	*	24	220	4	2.2
-170-M 42	2	8	18	5	170	42	28	62	22.4	36	50	24	225	4.5	1.3
-195-M 67	2	8	18	5	195	67	30	60	25	32	46	24	250	4.4	2.2
-SLFB8- 90-M 22	1	8	18	5	90	22	30	*	20.3	32	*	24	145	3.7	0.7
-110-M 42	1	8	18	5	110	42	30	*	22.4	32	*	24	165	3.7	1.1
-120-M 22	1	8	18	5	120	22	60	*	20.3	32	*	24	175	3.8	0.9
-135-M 67	1	8	18	5	135	67	30	*	25	32	*	24	190	3.8	1.7
-140-M 42	1	8	18	5	140	42	60	*	22.4	32	*	24	195	3.9	1.4
-150-M 22	2	8	18	5	150	22	30	60	20.3	32	46	24	205	4.3	0.9
-165-M 67	1	8	18	5	165	67	60	*	25	32	*	24	220	4	2.2
-170-M 42	2	8	18	5	170	42	30	60	22.4	32	46	24	225	4.3	1.4
-195-M 67	2	8	18	5	195	67	30	60	25	32	46	24	250	4.4	2.2

规格说明:

BT50 - SLSB - 8 - 195 - M67

- 加工有效长度 Working length
- L 长度 Length (L)
- 刀杆直径 Diameter
- 功能代号 Holder type
- 锥柄形式 Taper size

·BT50-SL 热缩刀柄 (3°一体型)

BT50-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



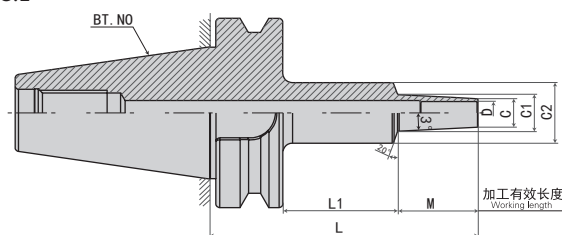


FIG.2

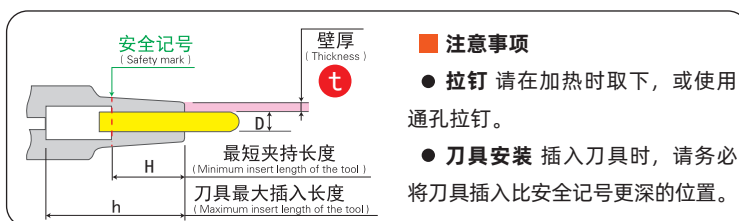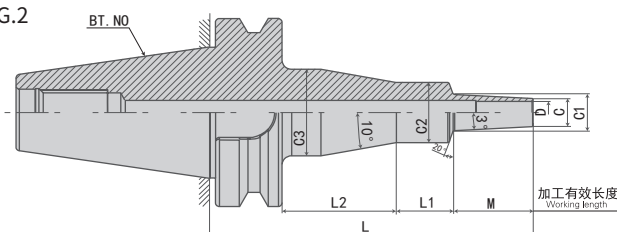

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT50-SLSA10-110-M 42	1	10	13	1.5	110	42	30	*	17.4	25	*	30	165	3.6	2.6
-135-M 67	1	10	13	1.5	135	67	30	*	20	32	*	30	190	3.7	4
-140-M 42	1	10	13	1.5	140	42	60	*	17.4	25	*	30	195	3.7	3.7
-165-M 67	1	10	13	1.5	165	67	60	*	20	32	*	30	220	3.9	4.6
-M 97	1	10	13	1.5	165	97	30	*	23.2	32	*	30	220	3.8	6
-170-M 42	2	10	13	1.5	170	42	33	57	17.4	25	39	30	225	4	3.5
-195-M 67	2	10	13	1.5	195	67	30	60	20	32	46	30	250	4.3	4.6
-M 97	1	10	13	1.5	195	97	60	*	23.2	32	*	30	250	3.9	6.9
-225-M 97	2	10	13	1.5	225	97	30	60	23.2	32	46	30	280	4.4	6.8
-SLSB10-110-M 42	1	10	16	3	110	42	30	*	20.4	32	*	30	165	3.7	1.4
-135-M 67	1	10	16	3	135	67	30	*	23	32	*	30	190	3.8	2.4
-140-M 42	1	10	16	3	140	42	60	*	20.4	32	*	30	195	3.9	1.8
-165-M 67	1	10	16	3	165	67	60	*	23	32	*	30	220	3.9	3
-M 97	1	10	16	3	165	97	30	*	26.2	32	*	30	220	3.9	3.7
-170-M 42	2	10	16	3	170	42	30	60	20.4	32	46	30	225	4.3	1.8
-195-M 67	2	10	16	3	195	67	30	60	23	32	46	30	250	4.3	3
-M 97	1	10	16	3	195	97	60	*	26.2	32	*	30	250	4	4.5
-M127	1	10	16	3	195	127	30	*	29.3	42	*	30	250	4	4.5
-225-M 97	2	10	16	3	225	97	30	60	26.2	32	46	30	280	4.4	4.4
-M127	1	10	16	3	225	127	60	*	29.3	42	*	30	280	4.2	4.9
-M157	1	10	16	3	225	157	30	*	32.5	42	*	30	280	4.1	5.6
-255-M127	2	10	16	3	255	127	28	62	29.3	42	56	30	310	4.8	4.9
-M157	1	10	16	3	255	157	60	*	32.5	42	*	30	310	4.4	6.1
-285-M157	2	10	16	3	285	157	28	62	32.5	42	56	30	340	5	6.1

规格说明:

BT50 - SLSA - 10 - 110 - M42

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT50-SL 热缩刀柄（3°一体型）

BT50-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



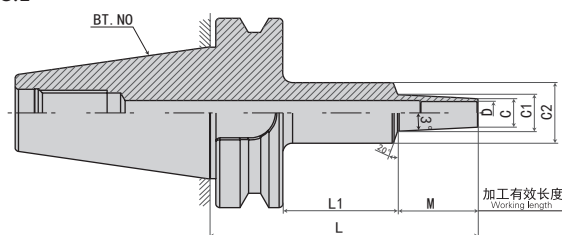


FIG.2

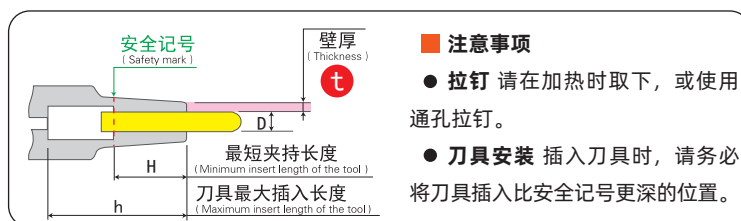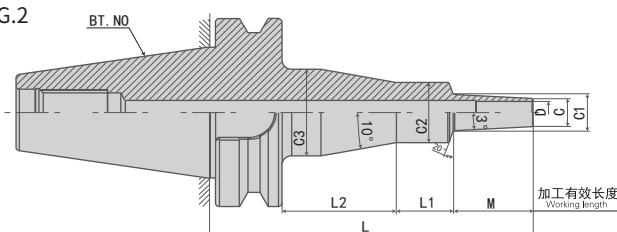

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT50-SLRB10- 90-M22	1	10	22	6	90	22	30	*	24.3	32	*	30	145	3.7	0.6
-110-M42	1	10	22	6	110	42	30	*	26.4	32	*	30	165	3.8	0.8
-120-M22	1	10	22	6	120	22	60	*	24.3	32	*	30	175	3.9	0.8
-135-M67	1	10	22	6	135	67	30	*	29	42	*	30	190	3.9	1.1
-140-M42	1	10	22	6	140	42	60	*	26.4	32	*	30	195	3.9	1.2
-150-M22	2	10	22	6	150	22	30	60	24.3	32	46	30	205	4.3	0.8
-165-M67	1	10	22	6	165	67	60	*	29	42	*	30	220	4.1	1.3
-170-M42	2	10	22	6	170	42	28	62	26.4	36	50	30	225	4.5	1
-195-M67	2	10	22	6	195	67	28	62	29	42	56	30	250	4.7	1.3
-SLFB10-90-M22	1	10	22	6	90	22	30	*	24.3	32	*	30	145	3.7	0.6
-110-M42	1	10	22	6	110	42	30	*	26.4	32	*	30	165	3.8	0.8
-120-M22	1	10	22	6	120	22	60	*	24.3	32	*	30	175	3.9	0.8
-135-M67	1	10	22	6	135	67	30	*	29	42	*	30	190	3.9	1.1
-140-M42	1	10	22	6	140	42	60	*	26.4	36	*	30	195	4	1
-150-M22	2	10	22	6	150	22	30	60	24.3	32	46	30	205	4.3	0.8
-165-M67	1	10	22	6	165	67	60	*	29	42	*	30	220	4.1	1.3
-170-M42	2	10	22	6	170	42	30	60	26.4	32	46	30	225	4.3	1.2
-195-M67	2	10	22	6	195	67	28	62	29	42	56	30	250	4.7	1.3
-SLSA12-110-M42	1	12	15	1.5	110	42	30	*	19.4	32	*	30	165	3.7	1.9
-135-M67	1	12	15	1.5	135	67	30	*	22	32	*	30	190	3.7	3.3
-140-M42	1	12	15	1.5	140	42	60	*	19.4	32	*	30	195	3.8	2.3
-165-M67	1	12	15	1.5	165	67	60	*	22	32	*	30	220	3.9	3.9
-M97	1	12	15	1.5	165	97	30	*	25.2	32	*	30	220	3.8	4.9
-170-M42	2	12	15	1.5	170	42	30	60	19.4	32	46	30	225	4.3	2.3
-195-M67	2	12	15	1.5	195	67	30	60	22	32	46	30	250	4.3	3.9
-M97	1	12	15	1.5	195	97	60	*	25.2	32	*	30	250	4	5.9
-225-M97	2	12	15	1.5	225	97	30	60	25.2	32	46	30	280	4.4	5.8

规格说明:

BT50 - SLRB - 10 - 90 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT50-SL 热缩刀柄（3°一体型）

BT50-SL SHRINK FIT HOLDER(3° MONO)



FIG.1


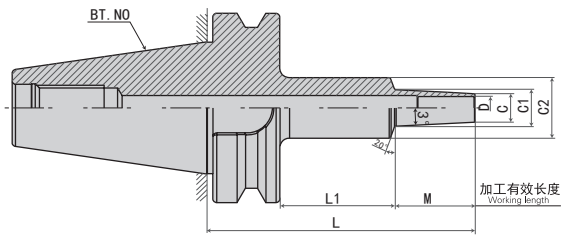


FIG.2

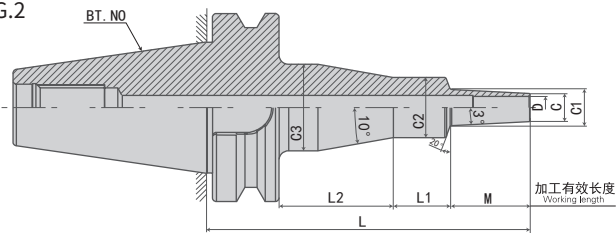

安全记号
(Safety mark)

壁厚
(Thickness)
t

最短夹持长度
(Minimum insert length of the tool)
H

刀具最大插入长度
(Maximum insert length of the tool)
h

注意事项

- 拉钉 请在加热时取下，或使用通孔拉钉。
- 刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT50-SLSB12-110-M42	1	12	19	3.5	110	42	30	*	23.4	32	*	30	165	3.7	1.1
-135-M67	1	12	19	3.5	135	67	30	*	26	32	*	30	190	3.8	1.9
-140-M42	1	12	19	3.5	140	42	60	*	23.4	32	*	30	195	3.9	1.6
-165-M67	1	12	19	3.5	165	67	60	*	26	32	*	30	220	3.9	2.5
-M97	1	12	19	3.5	165	97	30	*	29.2	42	*	30	220	3.9	2.4
-170-M42	2	12	19	3.5	170	42	28	62	23.4	36	50	30	225	4.5	1.3
-195-M67	2	12	19	3.5	195	67	30	60	26	32	46	30	250	4.4	2.4
-M97	1	12	19	3.5	195	97	60	*	29.2	42	*	30	250	4.2	2.7
-M127	1	12	19	3.5	195	127	30	*	32.3	42	*	30	250	4.1	3.3
-225-M97	2	12	19	3.5	225	97	28	62	29.2	42	56	30	280	4.8	2.8
-M127	1	12	19	3.5	225	127	60	*	32.3	42	*	30	280	4.3	3.7
-M157	1	12	19	3.5	225	157	30	*	35.5	42	*	30	280	4.3	4.1
-255-M127	2	12	19	3.5	255	127	28	62	32.3	42	56	30	310	4.9	3.7
-M157	1	12	19	3.5	255	157	60	*	35.5	42	*	30	310	4.5	4.7
-285-M157	2	12	19	3.5	285	157	28	62	35.5	42	56	30	340	5.1	4.7
-SLRB12- 90-M22	1	12	26	7	90	22	30	*	28.3	42	*	30	145	3.7	0.4
-110-M42	1	12	26	7	110	42	30	*	30.4	42	*	30	165	3.8	0.6
-120-M22	1	12	26	7	120	22	60	*	28.3	42	*	30	175	4	0.5
-135-M67	1	12	26	7	135	67	30	*	33	42	*	30	190	4	0.8
-140-M42	1	12	26	7	140	42	60	*	30.4	42	*	30	195	4.1	0.7
-150-M22	2	12	26	7	150	22	28	62	28.3	42	56	30	205	4.6	0.5
-165-M67	1	12	26	7	165	67	60	*	33	42	*	30	220	4.2	1
-170-M42	2	12	26	7	170	42	28	62	30.4	42	56	30	225	4.7	0.7
-195-M67	2	12	26	7	195	67	28	62	33	42	56	30	250	4.8	1.1

规格说明:

BT50 - SLSB - 12 - 110 - M42

加工有效长度 Working length

L 长度 Length (L)

刀杆直径 Diameter

功能代号 Holder type

锥柄形式 Taper size

·BT50-SL 热缩刀柄（3°一体型）

BT50-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



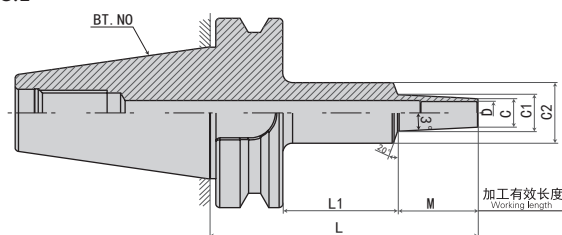


FIG.2

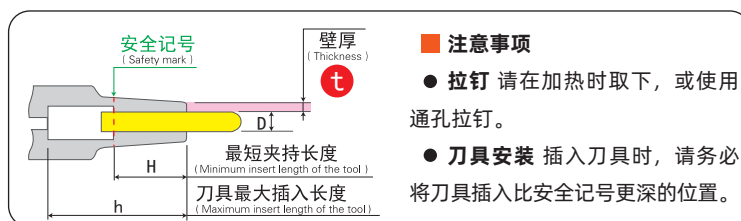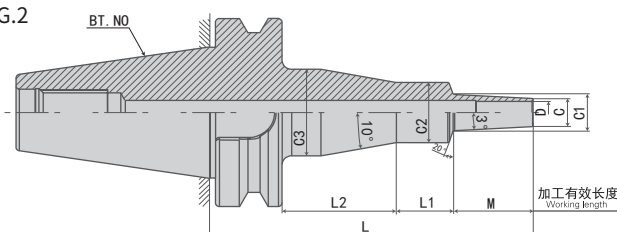

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT50-SLFB12- 90-M22	1	12	26	7	90	22	30	*	28.3	42	*	30	145	3.7	0.4
-110-M42	1	12	26	7	110	42	30	*	30.4	42	*	30	165	3.8	0.6
-120-M22	1	12	26	7	120	22	60	*	38.3	42	*	30	175	4	0.5
-135-M67	1	12	26	7	135	67	30	*	33	42	*	30	190	4	0.8
-140-M42	1	12	26	7	140	42	60	*	30.4	42	*	30	195	4.1	0.7
-150-M22	2	12	26	7	150	22	28	62	28.3	42	56	30	205	4.6	0.5
-165-M67	1	12	26	7	165	67	60	*	33	42	*	30	220	4.2	1
-170-M42	2	12	26	7	170	42	28	62	30.4	42	56	30	225	4.7	0.7
-195-M67	2	12	26	7	195	67	28	62	33	42	56	30	250	4.8	1.1
-SLSB16-110-M42	1	16	24	4	110	42	30	*	28.4	42	*	32	165	3.8	0.7
-135-M67	1	16	24	4	135	67	30	*	31	42	*	32	190	3.9	1.1
-140-M42	1	16	24	4	140	42	60	*	28.4	42	*	32	195	4	0.9
-165-M67	1	16	24	4	165	67	60	*	31	42	*	32	220	4.1	1.4
-M97	1	16	24	4	165	97	30	*	34.2	42	*	32	220	4	1.7
-170-M42	2	16	24	4	170	42	28	62	28.4	42	56	32	225	4.6	0.9
-195-M67	2	16	24	4	195	67	28	62	31	42	56	32	250	4.7	1.4
-M97	1	16	24	4	195	97	60	*	34.2	42	*	32	250	4.3	2
-M127	1	16	24	4	195	127	30	*	37.3	53	*	32	250	4.2	2.1
-225-M97	2	16	24	4	225	97	28	62	34.2	42	56	32	280	4.9	2.1
-M127	1	16	24	4	225	127	60	*	37.3	53	*	32	280	4.6	2.3
-M157	1	16	24	4	225	157	30	*	40.5	53	*	32	280	4.4	2.6
-255-M127	2	16	24	4	255	127	28	62	37.3	53	67	32	310	5.5	2.3
-M157	1	16	24	4	255	157	60	*	40.5	53	*	32	310	4.8	2.8
-285-M157	2	16	24	4	285	157	28	62	40.5	53	67	32	340	5.7	2.9

规格说明:

BT50 - SLFB - 12 - 90 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT50-SL 热缩刀柄（3°一体型）

BT50-SL SHRINK FIT HOLDER(3° MONO)



FIG.1


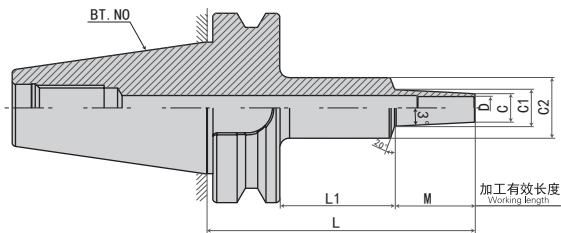


FIG.2

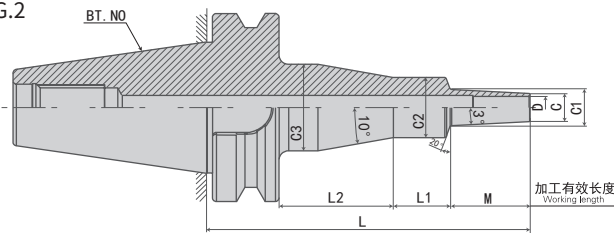

安全记号
(Safety mark)

壁厚
(Thickness)
t

最短夹持长度
(Minimum insert length of the tool)
H

刀具最大插入长度
(Maximum insert length of the tool)
h

注意事项

- 拉钉 请在加热时取下，或使用通孔拉钉。
- 刀具安装 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT50-SLRB16- 90-M22	1	16	32	8	90	22	30	*	34.3	42	*	32	145	3.8	0.3
-110-M42	1	16	32	8	110	42	30	*	36.4	42	*	32	165	3.9	0.5
-120-M22	1	16	32	8	120	22	60	*	34.3	42	*	32	175	4	0.5
-135-M67	1	16	32	8	135	67	30	*	39	42	*	32	190	4.1	0.6
-140-M42	1	16	32	8	140	42	60	*	36.4	42	*	32	195	4.2	0.6
-150-M22	2	16	32	8	150	22	28	62	34.3	42	56	32	205	4.6	0.5
-165-M67	1	16	32	8	165	67	60	*	39	42	*	32	220	4.3	0.9
-170-M42	2	16	32	8	170	42	28	62	36.4	42	56	32	225	4.8	0.7
-195-M67	2	16	32	8	195	67	28	62	39	42	56	32	250	4.9	0.9
-SLFB16-90-M22	1	16	32	8	90	22	30	*	34.3	42	*	32	145	3.8	0.3
-110-M42	1	16	32	8	110	42	30	*	36.4	42	*	32	165	3.9	0.5
-120-M22	1	16	32	8	120	22	60	*	34.3	42	*	32	175	4	0.5
-135-M67	1	16	32	8	135	67	30	*	39	42	*	32	190	4.1	0.6
-140-M42	1	16	32	8	140	42	60	*	36.4	42	*	32	195	4.2	0.6
-150-M22	2	16	32	8	150	22	28	62	34.3	42	56	32	205	4.6	0.5
-165-M67	1	16	32	8	165	67	60	*	39	42	*	32	220	4.3	0.9
-170-M42	2	16	32	8	170	42	28	62	36.4	42	56	32	225	4.8	0.7
-195-M67	2	16	32	8	195	67	28	62	39	42	56	32	250	4.9	0.9
-SLSB20-110-M42	1	20	29	4.5	110	42	30	*	33.4	42	*	40	165	3.8	0.5
-135-M67	1	20	29	4.5	135	67	30	*	36	42	*	40	190	3.9	0.9
-140-M42	1	20	29	4.5	140	42	60	*	33.4	42	*	40	195	4.1	0.8
-165-M67	1	20	29	4.5	165	67	60	*	36	42	*	40	220	4.2	1.2
-M97	1	20	29	4.5	165	97	30	*	39.2	53	*	40	220	4.1	1.1
-170-M42	2	20	29	4.5	170	42	28	62	33.4	42	56	40	225	4.7	0.8

规格说明:

BT50 - SLRB - 16 - 90 - M22

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT50-SL 热缩刀柄（3°一体型）

BT50-SL SHRINK FIT HOLDER(3° MONO)



FIG.1



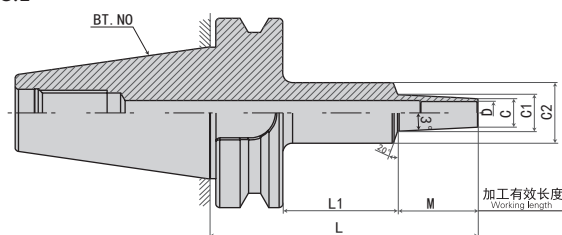


FIG.2

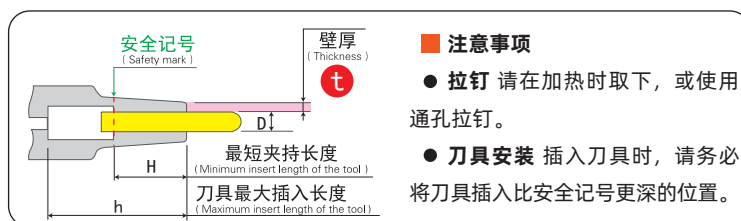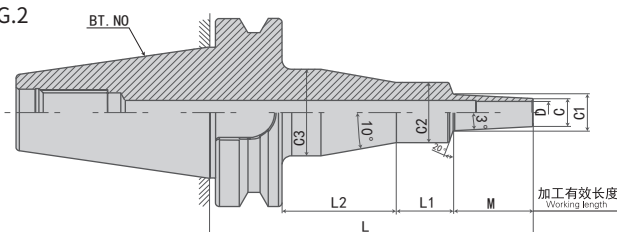

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT50-SLSB20-195-M67	2	20	29	4.5	195	67	28	62	36	42	56	40	250	4.8	1.2
-M97	1	20	29	4.5	195	97	60	*	39.2	53	*	40	250	4.5	1.3
-M127	1	20	29	4.5	195	127	30	*	42.3	53	*	40	250	4.3	1.5
-225-M97	2	20	29	4.5	225	97	28	62	39.2	53	67	40	280	5.4	1.3
-M127	1	20	29	4.5	225	127	60	*	42.3	53	*	40	280	4.7	1.8
-M157	1	20	29	4.5	225	157	30	*	45.5	53	*	40	280	4.6	1.7
-255-M127	2	20	29	4.5	255	127	28	62	42.3	53	67	40	310	5.6	1.7
-M157	1	20	29	4.5	255	157	60	*	45.5	53	*	40	310	5	2.2
-285-M157	2	20	29	4.5	285	157	28	62	45.5	53	67	40	340	5.9	2.2
-SLRB20-110-M42	1	20	38	9	110	42	30	*	42.4	53	*	40	165	4	0.3
-135-M67	1	20	38	9	135	67	30	*	45	53	*	40	190	4.2	0.4
-140-M42	1	20	38	9	140	42	60	*	42.4	53	*	40	195	4.4	0.4
-165-M67	1	20	38	9	165	67	60	*	45	53	*	40	220	4.6	0.6
-170-M42	2	20	38	9	170	42	28	62	42.4	53	67	40	225	5.3	0.4
-195-M67	2	20	38	9	195	67	28	62	45	53	67	40	250	5.5	0.6
-SLFB20-110-M42	1	20	38	9	110	42	30	*	42.4	53	*	40	165	4	0.3
-135-M67	1	20	38	9	135	67	30	*	45	53	*	40	190	4.2	0.4
-140-M42	1	20	38	9	140	42	60	*	42.4	53	*	40	195	4.4	0.4
-165-M67	1	20	38	9	165	67	60	*	45	53	*	40	220	4.6	0.6
-170-M42	2	20	38	9	170	42	28	62	42.4	53	67	40	225	5.3	0.4
-195-M67	2	20	38	9	195	67	28	62	45	53	67	40	250	5.5	0.6

规格说明:

BT50 - SLSB - 20 - 195 - M67

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 加工有效长度 Working length

·BT50-SL 热缩刀柄（3°一体型）

BT50-SL SHRINK FIT HOLDER(3° MONO)



FIG.1




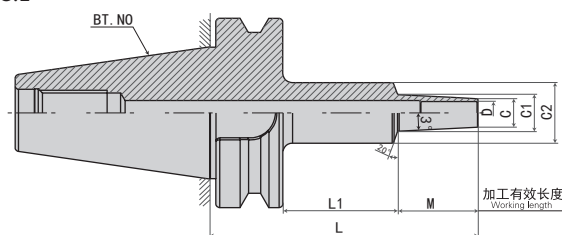


FIG.2

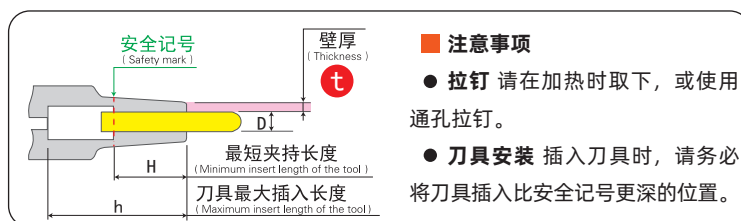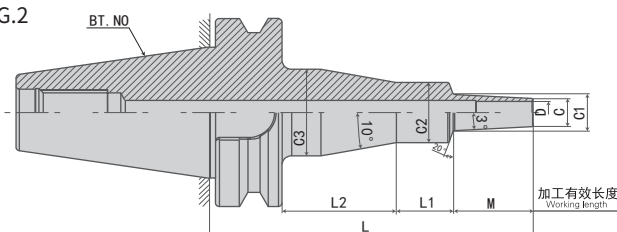

型号 Model	FIG	D	C	t	L	M	L1	L2	C1	C2	C3	H	h	重量 KGS	S
BT50-SLRB25-110-M42	1	25	45	10	110	42	30	*	49.4	53	*	45	165	4.1	0.3
-140-M42	1	25	45	10	140	42	60	*	49.4	53	*	45	195	4.5	0.4
-170-M42	2	25	45	10	170	42	28	62	49.4	53	67	45	195	5.3	0.4
SLFB25-110-M42	1	25	45	10	110	42	30	*	49.4	53	*	45	165	4.1	0.3
-140-M42	1	25	45	10	140	42	60	*	49.4	53	*	45	195	4.5	0.4
-170-M42	2	25	45	10	170	42	28	62	49.4	53	67	45	195	5.4	0.4
-SLRB32-110-M42	1	32	54	11	110	42	30	*	58.4	63	*	50	160	4.0	0.2
-140-M42	1	32	54	11	140	42	60	*	58.4	63	*	50	171	4.6	0.3
-170-M42	2	32	54	11	170	42	28	62	58.4	63	77	50	171	5.8	0.3

规格说明:

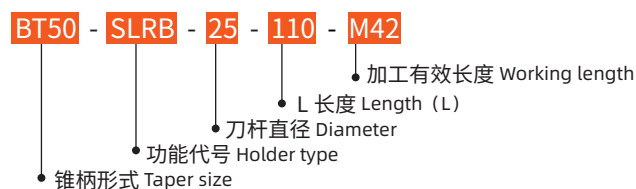

·BT50-SL 热缩刀柄（CV 曲线型）

BT50-SL SHRINK FIT HOLDER(CV CURVE)



FIG.1




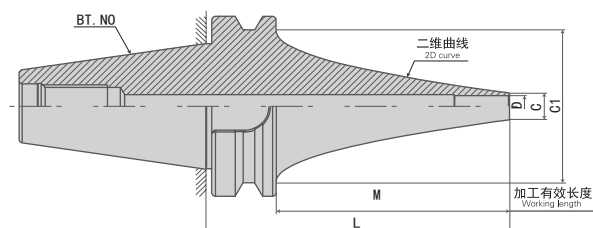


FIG.2

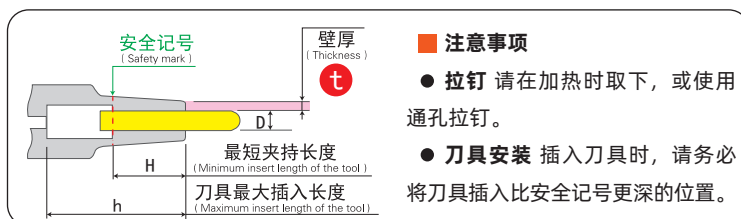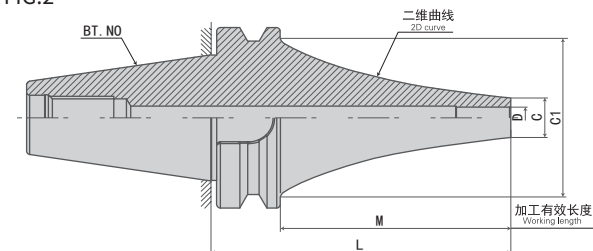

型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
BT50-SLSA4-165CV	1	4	7	1.5	165	127	85	12	220	5.2	1.8
-195CV	1	4	7	1.5	195	157	85	12	250	5.3	2.6
-225CV	1	4	7	1.5	225	187	85	12	280	5.5	3.8
-255CV	1	4	7	1.5	255	217	85	12	310	5.6	5.7
-285CV	1	4	7	1.5	285	247	85	12	340	6.4	5.9
-315CV	1	4	7	1.5	315	277	85	12	370	8.3	7.7
-SLSA6-165CV	1	6	9	1.5	165	127	85	18	220	5.1	1.5
-195CV	1	6	9	1.5	195	157	85	18	250	5.2	2.4
-225CV	1	6	9	1.5	225	187	85	18	280	5.7	2.9
-255CV	1	6	9	1.5	255	217	85	18	310	5.9	4
-285CV	1	6	9	1.5	285	247	85	18	340	6.2	5.2
-315CV	1	6	9	1.5	315	277	85	18	370	8.4	6.9
-SLSA8-165CV	1	8	11	1.5	165	127	85	24	220	4.9	1.4
-195CV	1	8	11	1.5	195	157	85	24	250	5.3	1.9
-225CV	1	8	11	1.5	225	187	85	24	280	5.8	2.3
-255CV	1	8	11	1.5	255	217	85	24	310	5.8	3.7
-285CV	1	8	11	1.5	285	247	85	24	340	6	4.9
-315CV	1	8	11	1.5	315	277	85	24	370	8.4	5
-SLRA8-195CV	2	8	16	4	195	157	85	24	250	5.4	1.1
-225CV	2	8	16	4	225	187	85	24	280	5.6	1.5
-255CV	2	8	16	4	255	217	85	24	310	5.8	2.2
-285CV	2	8	16	4	285	247	85	24	340	5.9	3

规格说明:

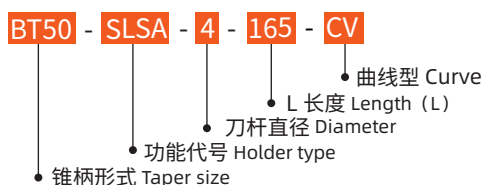

·BT50-SL 热缩刀柄（CV 曲线型）

BT50-SL SHRINK FIT HOLDER(CV CURVE)



FIG.1



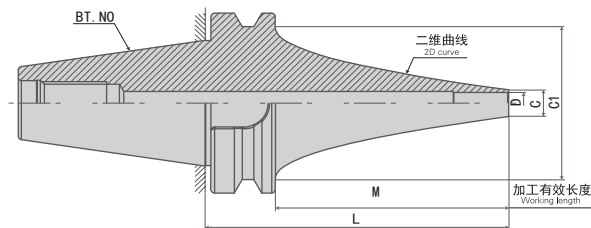


FIG.2

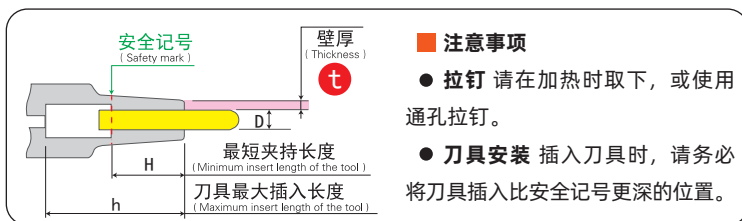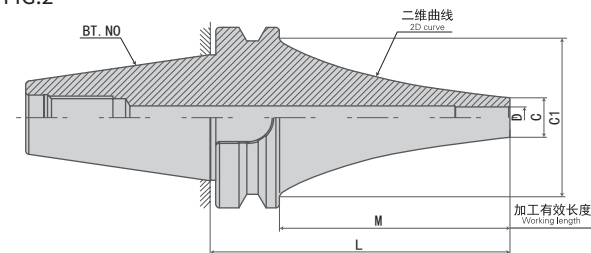

型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
BT50-SLFA8-195CV	2	8	16	4	195	157	85	24	250	5.4	1.1
 -225CV	2	8	16	4	225	187	85	24	280	5.6	1.5
 -255CV	2	8	16	4	255	217	85	24	310	5.8	2.2
-285CV	2	8	16	4	285	247	85	24	340	5.9	3
-SLSA10-165CV	1	10	13	1.5	165	127	85	30	220	4.9	1.2
-195CV	1	10	13	1.5	195	157	85	30	250	5.5	1.5
-225CV	1	10	13	1.5	225	187	85	30	280	5.4	2.4
-255CV	1	10	13	1.5	255	217	85	30	310	6.1	2.6
-285CV	1	10	13	1.5	285	247	85	30	340	6.3	3.7
-315CV	1	10	13	1.5	315	277	85	30	370	8.4	4.6
-SLRA10-165CV	2	10	19	4.5	165	127	85	30	220	5.1	0.7
-195CV	2	10	19	4.5	195	157	85	30	250	5.2	1.1
-225CV	2	10	19	4.5	225	187	85	30	280	5.9	1.2
-255CV	2	10	19	4.5	255	217	85	30	310	6.1	1.7
-285CV	2	10	19	4.5	285	247	85	30	340	6.2	2.4
-SLFA10-165CV	2	10	19	4.5	165	127	85	30	220	5.1	0.7
 -195CV	2	10	19	4.5	195	157	85	30	250	5.2	1.1
 -225CV	2	10	19	4.5	225	187	85	30	280	5.9	1.2
-255CV	2	10	19	4.5	255	217	85	30	310	6.1	1.7
-285CV	2	10	19	4.5	285	247	85	30	340	6.2	2.4

规格说明:

BT50 - **SLFA** - **8** - **195** - **CV**

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 曲线型 Curve

·BT50-SL 热缩刀柄（CV 曲线型）

BT50-SL SHRINK FIT HOLDER(CV CURVE)



FIG.1



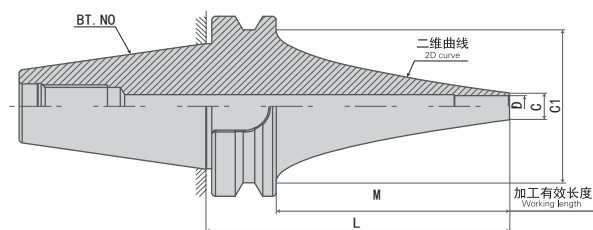


FIG.2

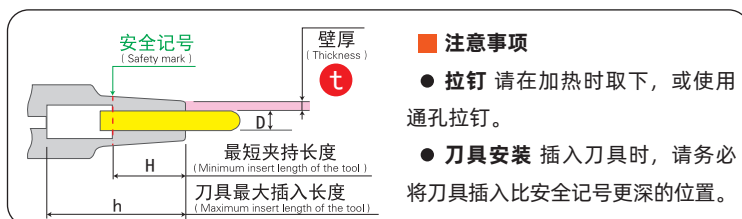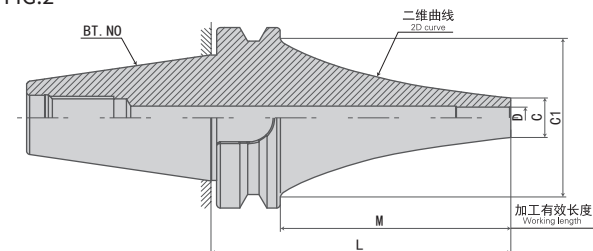

型号 Model	FIG	D	C	t	L	M	C1	H	h	重量 KGS	S
BT50-SLSA12-165CV	1	12	15	1.5	165	127	84	30	220	4.8	1.2
-195CV	1	12	15	1.5	195	157	85	30	250	5.6	1.2
-225CV	1	12	15	1.5	225	187	85	30	280	5.8	1.8
-255CV	1	12	15	1.5	255	217	85	30	310	6	2.6
-285CV	1	12	15	1.5	285	247	85	30	340	6.2	3.5
-315CV	1	12	15	1.5	315	277	85	30	370	8.5	3.6
-SLRA12-165CV	2	12	22	22	165	127	85	30	220	5.1	0.7
-195CV	2	12	22	22	195	157	85	30	250	5.6	0.8
-225CV	2	12	22	22	225	187	85	30	280	5.6	1.3
-255CV	2	12	22	22	255	217	85	30	310	5.8	1.6
-285CV	2	12	22	22	285	247	85	30	340	6.1	2.1
-SLFA12-165CV	2	12	22	22	165	127	85	30	220	5.1	0.7
-195CV	2	12	22	22	195	157	85	30	250	5.6	0.8
-225CV	2	12	22	22	225	187	85	30	280	5.6	1.3
-255CV	2	12	22	22	255	217	85	30	310	5.8	1.6
-285CV	2	12	22	22	285	247	85	30	340	6.1	2.1


规格说明:

BT50 - SLSA - 12 - 165 - CV

- 锥柄形式 Taper size
- 功能代号 Holder type
- 刀杆直径 Diameter
- L 长度 Length (L)
- 曲线型 Curve

·BT50-SL 热缩刀柄（CV 曲线型）

BT50-SL SHRINK FIT HOLDER(CV CURVE)

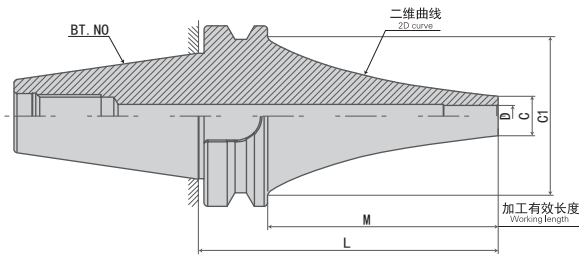

安全记号 (Safety mark)

壁厚 (Thickness) t

最短夹持长度 (Minimum insert length of the tool) H

刀具最大插入长度 (Maximum insert length of the tool) h

注意事项

- **拉钉** 请在加热时取下，或使用通孔拉钉。
- **刀具安装** 插入刀具时，请务必将刀具插入比安全记号更深的位置。

型号 Model	D	C	t	L	M	C1	H	h	重量 KGS	S
BT50-SLSB16-165CV	16	21	2.5	165	127	85	32	220	5.4	0.6
-195CV	16	21	2.5	195	157	85	32	250	5.4	1.1
-225CV	16	21	2.5	225	187	85	32	280	6.3	1.2
-255CV	16	21	2.5	255	217	85	32	310	6.1	2
-285CV	16	21	2.5	285	247	85	32	340	7	2
-315CV	16	21	2.5	315	277	85	32	370	8.6	2.6
-SLSB20-165CV	20	26	3	165	127	85	40	220	5.4	0.6
-195CV	20	26	3	195	157	85	40	250	6.1	0.7
-225CV	20	26	3	225	187	85	40	280	5.8	1.2
-255CV	20	26	3	255	217	85	40	310	6.7	1.3
-285CV	20	26	3	285	247	85	40	340	7	1.7
-315CV	20	26	3	315	277	85	40	370	8.9	2.3

规格说明:

BT50 - SLSB - 16 - 165 - CV

- BT50: 锥柄形式 Taper size
- SLSB: 功能代号 Holder type
- 16: 刀杆直径 Diameter
- 165: L 长度 Length (L)
- CV: 曲线型 Curve